This is a digital copy of a book that was preserved for generations on library shelves before it was carefully scanned by Google as part of a project to make the world's books discoverable online.

It has survived long enough for the copyright to expire and the book to enter the public domain. A public domain book is one that was never subject to copyright or whose legal copyright term has expired. Whether a book is in the public domain may vary country to country. Public domain books are our gateways to the past, representing a wealth of history, culture and knowledge that's often difficult to discover.

Marks, notations and other marginalia present in the original volume will appear in this file - a reminder of this book's long journey from the publisher to a library and finally to you.

Usage guidelines

Google is proud to partner with libraries to digitize public domain materials and make them widely accessible. Public domain books belong to the public and we are merely their custodians. Nevertheless, this work is expensive, so in order to keep providing this resource, we have taken steps to prevent abuse by commercial parties, including placing technical restrictions on automated querying.

We also ask that you:

+ *Make non-commercial use of the files* We designed Google Book Search for use by individuals, and we request that you use these files for personal, non-commercial purposes.

+ *Refrain from automated querying* Do not send automated queries of any sort to Google's system: If you are conducting research on machine translation, optical character recognition or other areas where access to a large amount of text is helpful, please contact us. We encourage the use of public domain materials for these purposes and may be able to help.

+ *Maintain attribution* The Google "watermark" you see on each file is essential for informing people about this project and helping them find additional materials through Google Book Search. Please do not remove it.

+ *Keep it legal* Whatever your use, remember that you are responsible for ensuring that what you are doing is legal. Do not assume that just because we believe a book is in the public domain for users in the United States, that the work is also in the public domain for users in other countries. Whether a book is still in copyright varies from country to country, and we can't offer guidance on whether any specific use of any specific book is allowed. Please do not assume that a book's appearance in Google Book Search means it can be used in any manner anywhere in the world. Copyright infringement liability can be quite severe.

About Google Book Search

Google's mission is to organize the world's information and to make it universally accessible and useful. Google Book Search helps readers discover the world's books while helping authors and publishers reach new audiences. You can search through the full text of this book on the web at `http://books.google.com/`

MODEL LOCOMOTIVE ENGINEER

MICHAEL REYNOLDS.

WEALE'S SCIENTIFIC & TECHNICAL SERIES.

CIVIL ENGINEERING & SURVEYING.

Civil Engineering. H. Law & D. K. Clark . . 6/6
Pioneer Engineering. E. Dobson 4/6
Iron Bridges of Moderate Span. H. W. Pendred. 2/–
Iron Bridges & Girders. F. Campin 2/6
Constructional Steel & Ironwork. F. Campin. *In the Press.*
Tubular & Girder Bridges. G. D. Dempsey . . 2/–
Materials and Construction. F. Campin . . . 3/–
Sanitary Work. C. Slagg 3/–
Roads and Streets. H. Law & D. K. Clark . . 4/6
Construction of Gasworks. S. Hughes & W. Richards 5/6
Water Works. S. Hughes 4/–
. . . . . /–
. . . . . /6
. . . . . /6
. . . . . /6
. . . . . /–

Library

of the

University of Wisconsin

PURCHASED WITH THE
HILL RAILWAY LIBRARY FUND
A GIFT FROM
JAMES J. HILL
ST. PAUL

. . . . . /6
. . . . . /–
. . . . . /6
. . . . . /–
. . . . . /–
. . . . . /–
. . . . . /6
Steam and Machinery Management. M. P. Bale. 2/6
Steam and the Steam Engine. D. K. Clark . . 3/6
Steam Engine, Theory of. T. Baker . . . 1/6
Steam Engine. Dr. Lardner 1/6
Locomotive Engines. G. D. Dempsey & D. K. Clark. 3/–
Locomotive Engine Driving. M. Reynolds . . 3/6
Stationary Engine Driving. M. Reynolds . . 3/6
Model Locomotive Engineer. M. Reynolds . . 3/6
Modern Workshop Practice. J. G. Winton . . 3/6
Mechanical Engineering. F. Campin 2/6
Details of M[redacted] . . . 3/–
Elementary [redacted] Brewer . 1/6

WEALE'S SCIENTIFIC & TECHNICAL SERIES.

MECHANICAL ENGINEERING, &c.—*contd.*

Sewing Machinery. J. W. URQUHART	2/-
Power of Water. J. GLYNN	2/-
Power in Motion. J. ARMOUR	2/-
Iron and Heat. J. ARMOUR	2/6
Mechanism and Machines. T. BAKER & J. NASMYTH	2/6
Mechanics. C. TOMLINSON	1/6
Cranes and Machinery. J. GLYNN	1/6
Smithy and Forge. W. J. E. CRANE	2/6
Sheet-Metal Worker's Guide. W. J. E. CRANE	1/6

MINING & METALLURGY.

Mineralogy. A. RAMSAY	3/6
Coal and Coal Mining. Sir W. W. SMYTH	3/6
Metallurgy of Iron. H. BAUERMAN	5/-
Mineral Surveyor's Guide. W. LINTERN	3/6
Slate and Slate Quarrying. D. C. DAVIES	3/-
Mining and Quarrying. J. H. COLLINS	1/6
Subterraneous Surveying. T. FENWICK & T. BAKER	2/6
Mining Tools. W. MORGANS	2/6
Plates to ditto. 4to.	4/6
Physical Geology. PORTLOCK & TATE	2/-
Historical Geology. R. TATE	2/6
The above 2 vols., bound together	4/6
Electro-Metallurgy. A. WATT	3/6

NAVIGATION, SHIPBUILDING, &c.

Navigation. J. GREENWOOD & W. H. ROSSER	2/6
Practical Navigation. GREENWOOD, ROSSER & LAW	7/-
Navigation and Nautical Astronomy. J. R. YOUNG	2/6
Mathematical & Nautical Tables. LAW & YOUNG	4/-
Masting and Rigging. R. KIPPING	2/-
Sails and Sailmaking. R. KIPPING	2/6
Marine Engines. R. MURRAY & G. CARLISLE	4/6
Iron Ship-Building. J. GRANTHAM	4/-
Naval Architecture. J. PEAKE	3/6
Ships, Construction of. H. A. SOMMERFELDT	1/6
Plates to ditto, 4to	7/6
Ships and Boats. W. BLAND	1/6

CROSBY LOCKWOOD & SON, 7, Stationers' Hall Court, E.C.

WEALE'S SCIENTIFIC & TECHNICAL SERIES.

AGRICULTURE & GARDENING.

Fertilisers & Feeding Stuffs. DR. B. DYER . . 1/-
Draining and Embanking. PROF. J. SCOTT . . 1/6
Irrigation and Water Supply. PROF. J. SCOTT . . 1/6
Farm Roads, Fences, and Gates. PROF. J. SCOTT . 1/6
Farm Buildings. PROF. J. SCOTT 2/-
Barn Implements and Machines. PROF. J. SCOTT . 2/-
Field Implements and Machines. PROF. J. SCOTT . 2/-
Agricultural Surveying. PROF. J. SCOTT . . . 1/6
The above 7 vols., bound together 12/-
Farm Management. R. S. BURN 2/6
Landed Estates Management. R. S. BURN . . 2/6
Farm & Landed Estates Management. R. S. BURN 6/-
Farming—Soils, Manures, and Crops. R. S. BURN 2/-
Farming—Outlines—Farming Economy. R. S. BURN 3/-
Farming—Cattle, Sheep, and Horses. R. S. BURN 2/6
Farming—Dairy, Pigs, and Poultry. R. S. BURN . 2/-
Farming—Sewage & Irrigation. R. S. BURN . . 2/6
The above 5 vols., bound together 12/-
Book-keeping for Farmers. J. M. WOODMAN . . 2/6
Ready Reckoner for Land. A. ARMAN . . . 2/-
Miller's & Farmer's Ready Reckoner . . . 2/-
Hay and Straw Measurer. J. STEELE 2/-
Meat Production. J. EWART 2/6
The Sheep. W. C. SPOONER 3/6
Multum-in-Parvo Gardening. S. WOOD . . . 1/-
Forcing Garden. S. WOOD 3/6
Market and Kitchen Gardening. C. W. SHAW . 3/-
Kitchen Gardening. G. M. F. GLENNY. . . . 1/6
Cottage Gardening. E. HOBDAY 1/6
Garden Receipts. C. W. QUIN 1/6
Potatoes: How to Grow. J. PINK 2/-
Culture of Fruit Trees. M. DU BREUIL . . . 3/6
Tree Planter & Plant Propagator. S. WOOD . 2/-
Tree Pruner. S. WOOD 1/6
Tree Planter, Propagator, & Pruner. S. WOOD . 3/6
Grafting and Budding. C. BALTET 2/6
Bees for Pleasure & Profit. G. G. SAMSON . . 1/-

CROSBY LOCKWOOD & SON, 7, Stationers' Hall Court, E.C.

George Stephenson.

THE FATHER OF RAILWAYS

London, Crosby Lockwood & Co.ª 7 Stationers Hall Court.

THE MODEL
LOCOMOTIVE ENGINEER
FIREMAN, AND ENGINE-BOY

COMPRISING

A HISTORICAL NOTICE OF THE PIONEER LOCOMOTIVE ENGINES AND THEIR INVENTORS

WITH

A PROJECT FOR THE ESTABLISHMENT OF CERTIFICATES OF QUALIFICATION IN THE RUNNING SERVICE OF RAILWAYS

BY

MICHAEL REYNOLDS

MEMBER OF THE SOCIETY OF ENGINEERS
FORMERLY LOCOMOTIVE INSPECTOR, LONDON, BRIGHTON, AND SOUTH COAST RAILWAY
AUTHOR OF "LOCOMOTIVE-ENGINE DRIVING," ETC., ETC.

NEW EDITION, WITH REVISED APPENDIX

LONDON
CROSBY LOCKWOOD AND SON
7 STATIONERS' HALL COURT, LUDGATE HILL
1896

129434
MAY 21 1909
TJD
.R33

696212

TO

DANIEL KINNEAR CLARK, Esq., C.E.

AUTHOR OF "RAILWAY MACHINERY," ETC. ETC.

THIS WORK

IS

Dedicated

AS A TRIBUTE OF RESPECT AND ESTEEM

BY

THE AUTHOR.

PREFACE.

A GREAT philosopher has said that three things are essential to perform anything well: namely, Models, Rules, and Practice. In view of the granting of certificates to locomotive engineers, firemen, and engine-boys, I have endeavoured to place before them *models* of self-help and self-reliance; *rules* that have proved themselves correct a thousand times over; and *practice* of the best possible railway service.

In supplying a model of perseverance, I was anxious to supply a real model, not a fabrication; and in all things, at all times, and for ever, a pattern such as all could wish for. I have met with many difficulties in my way. I have felt that what might suit a driver would not suit an engine-boy, and *vice versa*. But certificates are intended to form character, by cultivating whatever is true, brave, and honest. Now, I came to the conclusion that the engine-boy knew nothing of the early struggles of the locomotive, and of what had been done *for* him; and that the firemen knew but a little more, and many drivers very imperfectly. It therefore occurred to me that I should be affording the engine-boy information, the fireman gratification, and the engineer models of perseverance, by noticing what Murdoch, Trevethick, Hedley, and Stephenson had done to establish the locomotive:—first as a road-engine, then as a goods-engine, and lastly as a passenger-engine. The accomplishment of these results, giving us a speed of sixty miles an hour, and every

suburban comfort against the anxiety of the city, demanded characters of the highest standard, and such as could be regarded with pride.

The men who gave us our railways could not boast of a long roll of ancestors; they were working-men in every sense of the word, and on this account they were reasonable models. Again, they were, in feeling and opinion, aiming in their lives at something better than had ever been done before, and straining both heart and brain to accomplish it; and in this respect they were like ourselves, endeavouring to overcome every-day difficulties, and obtain some encouragement to make good any deficiency of which we may be conscious. A fellow-feeling makes the world kin, and by looking into the scenes surrounding the progress of the locomotive, in which Murdoch, Trevethick, Hedley, and Stephenson took part, there may be read page after page of gracious moments and dire despair. The struggle went on single-handed; signs of improvement everywhere were very faint, until at last, by the victory achieved at Rainhill, in October 1829, Stephenson settled the question of the locomotive for ever. I hope the account of their life-struggles, of which I could only mention a few, will prove of encouragement to many; and as they belonged to the class of railway men, so railway men at the present day will find much to remind them of their own experience.

The strong mind of George Stephenson is portrayed in the likeness of him which forms the frontispiece of this work. Not many engineers can hope to rival in their lives the successful career of the man; but, at the least, his example may be followed, at whatever distance.

The *rules* laid down, for the first time, in these pages for the guidance of engine-boys, firemen, and engineers, have been carefully considered in order to insure success. There is in every step a corresponding inducement to them to aspire by progressive experience and class-examination. Nothing has

been left to chance. Step by step, with rank to encourage, I have not only shown how a man's nature may be cultivated, but how it may be trained for the benefit not only of the man himself, but also for the railway company and the public. As now constituted, the service is unpopular. Hundreds of men go into the steam-sheds in a year, who in a few weeks go away disgusted. The ground is perished for want of cultivation. Every possible effort, as far as engines are concerned, have been made to improve the service of our railway engineers; but the improvement we want—and must have—will be of no avail unless it commences *within* the men first, so that the leaven may leaven the whole lump. There is no reason on earth why each of these men should not be encouraged to exhibit more intellectual skill in describing the engine fully on paper before passing for a driver;—if he cannot write, don't pass him. Then he might go on a stage further, and give a description of the working of his engine and of the traffic; he might go a step higher and grapple with higher questions touching the laws that govern combustion and the action of the steam in the cylinder, and prove himself fit for a better position.

It is proposed to grant him a certificate at each of these stages. First stage, third-class engineer; second stage, second-class engineer; third stage, first-class engineer. And similar series of stages for certificates for firemen and engine-boys.

As it is very easy to find fault,—much easier than doing the work,—I have laboured much in this cause, and have, in order to still further clear the way, reduced all the classes into a practical form, having almost put the examination words into the mouths of the candidates. There will be found, in the pages of this book, a complete system for the use of locomotive superintendents to work to; and a comprehensive system for the engineers of locomotive engines.

Finally, the plan is simple, but to the point; and it leaves no opening by which any man can reach the foot-plate without

having set before him all his duties. This much having been accomplished, it remains for the railway companies to assist in establishing in this country what is so much needed :—Locomotive engineer's certificates ; locomotive fireman's certificates ; locomotive engine-boy's certificates. For each grade, corresponding uniforms should be provided. The standing of the service would be raised fifty per cent. in a short time.

MICHAEL REYNOLDS.

STANDEFORD, WOLVERHAMPTON,
June 1879.

NOTE.—*In revising the following pages on the elevation of the status of locomotive enginemen, firemen, and engine-boys, and on the initiation of a system of certificates of their qualifications, I have been strongly impressed by the evidence of the enthusiasm with which Mr Reynolds has laboured at the good work; by the exhaustive manner in which he fathoms the difficulties of the problem; and by the very hopeful means by which he proposes to educate and to raise the efficiency of the excellent class of men who manipulate our locomotive power. In the prosecution of this self-imposed labour, the author might justly have been sustained by the assurance that there are few indeed, if there be any, who possess like him the needful qualifications for the work.*

D. K. CLARK.

PUBLISHER'S NOTE TO SECOND EDITION.

The present is a reprint of the First Edition, with the exception that in the APPENDIX *the opportunity has been taken of revising the description of the Westinghouse Brake, so as to include particulars of the Improved Brake, with its Quick-acting Triple-Valve, which has been brought into use upon long trains since the First Edition was published.*

DECEMBER 1894.

CONTENTS.

PART I.—THE PIONEER ENGINEERS.

PAGE

CHAPTER I.

THE LOCOMOTIVE MEN - - - - - - 1

CHAPTER II.

THE STATIONARY-ENGINE MEN - - - - - 6

CHAPTER III.

THE LOCOMOTIVE AND ITS DRIVER - - - - - 11

PART II.—EARLY HISTORY OF THE LOCOMOTIVE.

CHAPTER I.

THE IMPOSSIBILITY OF THE LOCOMOTIVE:—Cugnot's Engine.—Murdoch's Engine - - - - - - 20

CHAPTER II.

THE COAL TRAMWAYS: — Trevethick's Engines. — Wooden Rails.—Coal Waggons.—Brakes.—Cast-iron Rails at Colebrookedale.—Cast-iron Plate-rail.—Cast-iron Edge-rail - 27

PAGE

CHAPTER III.

RICHARD TREVETHICK:—The first Working Locomotives.—Trevethick and Vivian's Road Locomotive.—Trevethick's Railway Locomotive.—Trevethick at Cartagena, and his Voyage Home - - - - - - - 37

CHAPTER IV.

THE RACK-RAIL AND THE CENTRAL CHAIN:—Blenkinsop's Engine and the Rack-rail.—Chapman's Engine with the Central Chain.—Brunton's Locomotive Engine - - 49

CHAPTER V.

WILLIAM HEDLEY AND THE PLAIN RAILS:—Mr Blackett's Enterprise on the Wylam Railway.—Hedley's Engine.—His Test-carriage for proving adhesion.—"Black Billy."—Hedley's Second Engine - - - - - - 56

CHAPTER VI.

GEORGE STEPHENSON:—His Birthplace, Wylam.—Mid-Mill Winnin Colliery.—His Marriage.—Struggles.—Willington Quay.—Drawn for the Militia.—At Westmoor.—Breakdown at the "Grand Allies."—Freeing the High Pit of Water.—At Killingworth.—Receives an Order to Build an Engine - - - - - - - - - 67

CHAPTER VII.

GEORGE STEPHENSON'S FIRST LOCOMOTIVE:—Commenced the Construction of the Engine.—Failure of the Engine - 83

CHAPTER VIII.

THE BLAST IN THE CHIMNEY AND THE COUPLING-RODS:—Application of the Blast in the Chimney by Stephenson.—His Second Engine.—Growing Popularity of Railways - 92

CHAPTER IX.

GEORGE STEPHENSON A RAILWAY CONSTRUCTOR:—Engaged to Construct the Hetton Railway.—Interview with Mr Pease.—Factory at Newcastle-on-Tyne.—Project of a Railway between Liverpool and Manchester - - - 98

PAGE

CHAPTER X.

THE LIVERPOOL AND MANCHESTER RAILWAY, AND COMPETITION OF LOCOMOTIVES:—Introduction of a Bill in Parliament.—George Stephenson Cross-examined.—Competition of Locomotives.—The "Rocket."—The "Sans Pareil."—The "Novelty."—The Trials - - - 102

CHAPTER XI.

GEORGE STEPHENSON, THE SUCCESSFUL - - - 114

PART III.—CERTIFICATES OF QUALIFICATIONS IN THE RUNNING SERVICE, LOCOMOTIVE DEPARTMENT.

CHAPTER I.

THE MANAGEMENT OF A RAILWAY:—The General Manager.—The Locomotive Superintendent - - - - 117

CHAPTER II.

THE LOCOMOTIVE FOREMAN - - - - - 121

CHAPTER III.

THE ENGINE-BOY:—First Stage of Experience.—The Bar-boy.—Wheel Cleaning.—Foreman-cleaner.—Dangers in the Engine-shed - - - - - - 126

CHAPTER IV.

THIRD-CLASS ENGINE-BOY'S CERTIFICATE - - - 137

CHAPTER V.

SECOND-CLASS ENGINE-BOY'S CERTIFICATE - - - 139

CHAPTER VI.

FIRST-CLASS ENGINE-BOY'S CERTIFICATE - - - 140

CHAPTER VII.

THE FIREMAN - - - - - - - - 143

PAGE

CHAPTER VIII.

THIRD-CLASS FIREMAN'S CERTIFICATE:—To make up the Fire.—Oiling the Engine.—Filling the Sand-boxes.—Duties on the Road.—Habits of Observation - - - 147

CHAPTER IX.

SECOND-CLASS FIREMAN'S CERTIFICATE - - - 155

CHAPTER X.

FIRST-CLASS FIREMAN'S CERTIFICATE - - - - 156

CHAPTER XI.

THE ENGINEER - - - - - - - - 158

CHAPTER XII.

THE THIRD-CLASS ENGINEER'S CERTIFICATE: — Signals.— The Boiler.—The Fire-box.—The Framing and Motion.— The Cylinders and the Blast.—Feed-pumps.—Injector.— Axle-boxes.—Springs.—Valves, &c. - - - 16

CHAPTER XIII.

THE SECOND-CLASS ENGINEER'S CERTIFICATE: — With a Train.—Condition of the Engine.—Condition of the Fire. —Management of the Engine.—Combustion.—Smoke.— Coal and Steam.—The Action of Steam in the Cylinder.— Indicator-Diagrams - - - - - - 172

CHAPTER XIV.

THE FIRST-CLASS ENGINEER'S CERTIFICATE:—A Spirit of Inquiry.—Common Properties of Bodies.—Cohesion, Compressibility, Dilatation, Density, Malleability, Hardness.— Expansion and Contraction.—Study of Natural Philosophy. Geometry.—Mechanical Drawing - - - - 192

APPENDIX. — CONTINUOUS BRAKES.— The Westinghouse Automatic and Continuous Brake - - - - 229

INDEX - - - - - - - - 255

LIST OF ILLUSTRATIONS.

		PAGE
PORTRAIT OF GEORGE STEPHENSON		*Frontispiece*
FIG. 1.	CAST-IRON PLATE-RAIL	35
2.	CAST-IRON EDGE-RAIL	35
3.	TREVETHICK AND VIVIAN'S ROAD LOCOMOTIVE	38
4.	TREVETHICK'S RAILWAY LOCOMOTIVE	43
5.	BLENKINSOP'S ENGINE, WITH RACK-RAIL	50
6.	BRUNTON'S LOCOMOTIVE	54
7.	HEDLEY'S TEST-CARRIAGE	60
8.	HEDLEY'S ENGINE	64
9.	BIRTHPLACE OF GEORGE STEPHENSON, AT WYLAM	68
10.	GEORGE STEPHENSON'S SECOND ENGINE	94
11.	THE "ROCKET" PRIZE LOCOMOTIVE ENGINE	107
12.	THE "NOVELTY," BY BRAITHWAITE AND ERRICSON	109
13.	THE "ROCKET" AT WORK	113
14.	POSITION OF THE CRANKS FOR THE INSPECTION OF AN ENGINE	150
15, 16.	INDICATOR-DIAGRAMS	184
17.	Do. Do.	187
18.	Do. Do.	188
19.	Do. Do.	190
20 to 31.	GEOMETRY	209, 210
32 to 45.	PROBLEMS IN MECHANICAL DRAWING	212 to 219
46.	STIRLING'S EXPRESS ENGINE	221
47.	JOHNSON'S EXPRESS ENGINE	221

		PAGE
FIG. 48.	RAMSBOTTOM AND WEBB'S EXPRESS ENGINE -	221
49.	POSITION OF THE CRANKS FOR TESTING THE VALVES AND PISTONS - - -	222
50.	CRANKS IN A RIGHT-HAND ENGINE - -	222
51.	LAMINATED BEARING-SPRING - - -	223
52, 53.	RIVETED JOINTS - - - - 223,	224
54.	FIXING OF FLUE-TUBE - - - -	224
55.	TO MARK THE BEATS OF AN ENGINE - -	225
56.	MODERN SLIDE-VALVE - - - -	225
57.	CONICAL BEARING-SPRING - - -	226
58.	EXCENTRIC AND ROD - - - -	226
59.	CONNECTING ROD: LARGE END - -	226
60.	EXPRESS ENGINE, BY MESSRS BEYER, PEACOCK, AND CO. - - - - -	227
61.	INJECTOR - - - - - -	228
62, 63.	WESTINGHOUSE BRAKE, ON ENGINE - 234,	235
64.	Do. Do. ON CARRIAGE - -	236
65.	Do. Do. AIR-PUMP AND ACCESSORIES (PLATE I.) - - - *facing*	238
66.	WESTINGHOUSE BRAKE: BRAKE-CYLINDER AND ACCESSORIES (PLATE I.) - - *facing*	238
67.	WESTINGHOUSE BRAKE: DRIVER'S BRAKE-VALVE	241
68, 69, 70.	WESTINGHOUSE BRAKE: QUICK-ACTING TRIPLE-VALVE - - - - - -	245
71.	WESTINGHOUSE BRAKE: 8-INCH DOUBLE-PISTON CYLINDER - - - - -	249
72.	POSITION OF COUPLING HEADS BEFORE BEING UNITED - - - - - -	250
73, 74.	WESTINGHOUSE QUICK-ACTING BRAKE AS APPLIED TO AN ENGINE, TENDER, AND VEHICLE (PLATE II.) - - - *facing*	252

THE MODEL LOCOMOTIVE ENGINEER, FIREMAN, AND ENGINE-BOY.

PART I.

THE PIONEER ENGINEERS.

CHAPTER I.

THE LOCOMOTIVE MEN.

"WHO are the greatest men of the present age?" said John Bright in the House of Commons. "Not your warriors, not your statesmen: they are your engineers."

If we regard the achievements of Smeaton, Rennie, Telford and Stephenson, "souls that lived alone and dwelt apart," we shall find in the difficulties they had to encounter sufficient to excite our admiration. They fought the battle of life amidst unfavourable conditions; their life-struggles are full of dramatic interest to all, for the stern realities and uncertainties of life were present in every phase of their history.

Disappointments under such circumstances had no healing; for who could help them in matters that had their origin in their creative brains alone?

There were none before them, none after them, who had such difficulties to encounter as those which awaited these men of might.

There were no mechanics' institutions, scarcely any mechanical publications; these men had scarcely any library, there were no classes in their times. Yet, look at their bridges, look at their harbours, roads, canals, and aqueducts. Look at their lighthouses, breakwaters, railways, and locomotive engines.

Did ever such men live before? No.

Our greatest orator is right: our greatest engineers are our greatest men: truer men and greater men than ever hurled their battalions across a battle-field.

One may read between the lines the traces of anguish, faintings of heart, marks of the scorching tear, amid their labours. With no obliquity of vision, with singleness of eye, and oneness of purpose, they applied themselves to questions of the highest importance—whether it was the building of a bridge, or of a locomotive. Confronted with questions involving every conceivable difficulty, they worked their way with the self-confidence of giants.

Notwithstanding thousands of discouraging circumstances, they bore aloft the banner with the strange device "Excelsior," working on thoroughly and in a manly spirit—rising slowly and surely to fame.

In the history of iron and engineering, many chapters are written bearing testimony to limitless endurance.

When, haply, an avalanche of defeat overtook the

results of their labours, it only warned them. It did not utterly cast them down nor destroy them. It reminded them they were human. It told them that, after all, suffering under unknown conditions, strength came by struggling, and that the immortal side of humanity exhibited itself in heroic valour.

In the "Lives of the Engineers" are recorded the achievements of a class of men who have conferred the highest and the most extensive benefits on their country. One of these was George Stephenson.

George Stephenson, the immortal. The most enduring character in the history of railways and locomotive engines.

His name is known and revered throughout the civilised world.

George Stephenson is the hero of the last half-century in connection with railways.

Just as the Italians are musicians, and the Germans metaphysicians—by birth—so Englishmen are engineers, and there is nothing more natural than that Englishmen should apply their faculties to the science of locomotion.

By the labours of Murdoch, Trevethick, Hedley, Blenkinsop, and—last and greatest—Stephenson, it may be averred that we have secured such a blessing as man never before dreamed of.

The locomotive engine was not the invention of any one individual, it was the outcome of the reflections, taste, observation, and experience of many minds. It was not turned out perfect, like Minerva from the head of Jupiter, but "growed," like Topsy.

The locomotive engine is the last gift of God to Great Britain.

The establishment of the locomotive makes a story in itself: the story of a great battle, with adverse circumstances, opened by Trevethick as captain, and victoriously ended by Stephenson, gained at Rainhill.

"It was a most decisive victory," said the Duke of Wellington to Her Majesty, Queen Victoria, when showing the latter over the plains of Waterloo. It was a most decisive victory also at Rainhill, when Stephenson exhibited to the same duke the triumph of the locomotive.

Never a Cossack of the Don was prouder of his strong black charger than was Stephenson of his iron steed "Rocket" after that battle. To him it was a most momentous day.

It was in its results, also, very important from a national point of view, for he so completely defeated the opponents of locomotion by steam that they no longer resisted its development. It was impossible to withstand it; a pace of twenty miles an hour with the bleeding body of poor Huskisson, was too much for the opposition, and it was vanquished.

One enemy, who said the "iron horse" would never stand the fiery test, looked back and saw the "Duke of Waterloo" and the "Duke of Rainhill" holding audience together. "The crown of laurels," he exclaimed, "has this day fallen from stage-coaches." And he was right.

As the excited leaders advanced into the crowd, louder and louder grew the noise, and men, women, and children shouted, "Bravo, Stephenson! bravo, Stephenson!"

But we have said that the battle was commenced by Captain Trevethick.

Writing to a friend, Sir Humphry Davy said, after looking at the first engine of Trevethick's, "I shall soon hope to hear that the roads of England are the haunts of Captain Trevethick's dragons."

CHAPTER II.

THE STATIONARY-ENGINE MEN.

THE first quarter of the century promised well for steam-engines: they were becoming popular; and to be connected with steam practice was taken as complimentary to a man's intelligence. Any one who belonged, as a principal or as a subordinate, to the Soho factory, working under Messrs Boulton and Watt, was sure to command much respect, and to excite a feeling of simple admiration.

Mr Boulton was really a noble character; he spent about £78,000 without realising so much as the value of a sou. When a personal friend asked him what he did at Soho, "At Soho," replied he, "we sell what all the world wants, and that is power."

He was proud of the shop, proud of the steam-engine; and it was fortunate for England that he was proud of engineers.

Watt was an engineer hailing from Greenock, wondering how the world would "finish" him, and if he would have to go the way of most clever men, when providentially he was rescued by Boulton.

Boulton had some metal of intrinsic value in his pocket—gold; Watt had a head that could contrive

and scheme. Boulton at once saddled himself with Watt, and Watt turned out what Boulton took him to be—a good engineer—and both men became exceedingly rich.

As pioneers of the progress of the steam-engine, these two men commend themselves to the gratitude of all those whose course in life lies in the line of stationary-engine work. They turned out a man acquainted with every mechanical turn in machinery; that man was Murdoch, the inventor of the first locomotive, of whom more hereafter. Murdoch handed his ideas over to his pupil, Trevethick, who did more towards making a locomotive a success than any one before him. When the engine was brought under Stephenson's notice—which spoilt him for an engine-wright—it was in its infancy. There were several men about the year 1815 who, notwithstanding the difficulties which lay thick around them, and which brought much anxiety and cost much money, should be always mentioned in an historical account of the "Monarch of Speed." This is all the more necessary to be stated here, because the subject is interesting to all who are interested by the locomotive; and there are very few people nowadays who are not, though they may know very little of its history. There were grave doubts for years as to whether the locomotive would ever answer. These we intend to investigate. The engine was making progress when Stephenson took it in hand. This we intend to investigate also. And, further, we shall endeavour to show, step by step, what each of the ingenious persons, whose names are inseparably associated with it, have done.

George Stephenson and the "Grand Allies," his

masters, did much; *they* found it an infant, *he* made it a giant.

How is it possible to contemplate our great locomotive power without feeling that we should like to have some knowledge of the toiling that is going on daily and nightly in the steam-sheds to keep the traffic going?

It is our intention to explain how all this is done, and what is necessary to ensure success. We shall also determine what improvements can be made with safety and comfort.

The system is not perfect by a long way. There is all reasonable security, but all the advantages are not seized, and the service is not developed into the high state of efficiency to which it might attain. We would have provision made for further advances, changes for the better—work of reformation going on in all parts of the locomotive department.

No doubt, the ceaseless strife that goes on to keep up with the times retards any action for setting aside present arrangements for others. There is striving in all directions in the working department. Strife for approval in meeting the demand for new engines as fast as others give out. Strife to shine in all undertakings; strife to control; strife for power; strife for wealth.

In the running-shed we shall find a combination of all the virtues and vices of mankind.

The lambs of the Lord and the devil's imps cleaning, firing, driving, governing.

We find here men who cling most tenaciously to every species of old habits and customs, and to power.

We find here men forming a majority to success-

fully set aside any measure that is likely to interfere with private interests.

We find here men who, being in too great a hurry, strike before good sense and caution find place.

Statues raised to the progenitors of the steam-engine awaken surmises that there is something in steam.

There are statues to Watt and to Stephenson, and yet neither of them invented very much more than other great men; but they did what other great men did not, they took *steam* and tried to administer to the necessities of the hour, and each succeeded in his own sphere.

It is idle to sit down and say, "I will invent," unless there is something to direct such a decision. Great men rise from obscure positions simply because they do the right thing at the right moment.

The effect is to lessen some source of apprehended evil and partially destroy it.

Every improvement, every novelty in science, or in art, is the fertile parent of new wants. Want gives birth to new supplies, and every advancing step taken in the endless field before us leads on to some fresh advantage. The man comes, and things hidden from view come with him.

Many discoveries and inventions have been made, involving, indeed, a higher degree of intellectual power in the cognisance of matter, its laws and properties, as well as a more varied ingenuity, as regards construction and mode of application. The ship with her accessories, and the degree of knowledge required to conduct her through a distant and perilous voyage; the lens by which we are enabled to soar into the boundless regions of space or scrutinise the countless

myriads of animated beings whose existence the unassisted vision had never else discovered, and many other things, might be mentioned to show that the exhibition of high intelligence is not confined to the invention of the steam-engine.

But to trace the origin of the invention, although a very delightful task, and a matter of earnest inquiry, would be a long affair. It is right to render homage where it is due, and to clothe with honourable mention the names of those who by their illustrious acts really deserve it. Look at the effects now wrought by those great men who sleep the sleep that knows no waking.

The steam-engine traverses the rails and the seas in defiance of winds and tides; the earth gives up her metals and minerals, and we receive from the labours of our predecessors a goodly heritage. All the hard scheming was comparatively done years ago; knowledge now lies waiting to be gleaned; and time itself moves not so fast as improvements do.

CHAPTER III.

THE LOCOMOTIVE AND ITS DRIVER.

BLUCHER said when he first visited London, "My God, what a place to sack!" and if Denis Papin, Savery, Leopold, and a host of other engineers, Stephenson of course included, if they could make a visit to King's Cross, and see one of Patrick Stirling's magnificent "goers," and run a trip from London to Grantham, one hundred and five miles, with steam full on, they would say, "My God, Stirling, what an engine!"

It is a difficult matter to prophesy truly, but it may safely be said that we are not yet at the end of the improvements that have been going on of late years. There will be a change, and that in the direction of speed; perhaps there will not be much change in the engine; but in a short time, one hundred miles in the hour will be attained.

The ultimate achievement of the locomotive has yet to come; what has been done has been well done, and it is simply an act of injustice not to recognise that the locomotive superintendents of the present day are the best mechanics that have ever placed an engine on the metals. Look at their plans, their progress, the speed, the consumption, the endurance of their loco-

motives! There is a marvellous show of crack steeds at this hour in our steam-sheds, such as man never saw before. They make life more than ever pleasant and endurable; they are the Alpha and the Omega of our aids to enjoyment; they work us into town from a pretty suburban villa, or they sweep the rail like a thing of life from the south to the land of brown heath and shaggy wood, land of the mountain and the flood, and back. This is a fortunate time for travellers, although not many years past the performance of a journey, especially a long journey, was a matter of great concern. The times are different. We can not only travel in safety, but we can travel with comfort—with every comfort—in winter as well as in summer, by night and by day.

Not long ago, a happy wife residing in London, received a telegram from Edinburgh, informing her that, unless she started at once, she would not see her husband alive again. The "unhappy" wife rang for her servants. "Edinburgh at once," said she. In half an hour she was at King's Cross, and in nine hours and a half her carriage was speeding its way down Princes Street, in Edinburgh, the capital of Scotland.

Does a Thalberg or a Liszt make the piano sing under his fingers? Does a Paganini or an Ole Bull draw ravishing tones from the violin? Does the good right hand of Joachim pour imperishable sounds into the realms of your innermost soul, until the lips quiver, and the heart throbs, and you feel that they render palpable the thought that possesses them. Mark their laborious efforts to embody and express all that is within them. It is their existence, and, overflowing, it becomes a blessing to you.

So, on our great railway systems, the noble object is SPEED, and to maintain this, and at the same time to touch every heart, it is necessary to run as flame; and all the natural powers of an engine-builder, to keep pace with the times, must be directed towards achieving a triumph. A higher speed is possible, that is a fact. The next best thing to keep up the character of our railways, to report progress, is to leave nothing neglected; until it is impossible for an observer to suggest any improvement, so long as an individual can walk up to the engine and point out any deficiency, the result is not satisfactory.

With absolute sincerity of purpose, moving on until the voice of criticism is stopped: this is the way to arrive at the fullest state of proficiency.

The *feeling* of satisfaction is highly dangerous. The ground whereon we stand is never free from those who are on the march; we must either go on or be left behind. It is quite certain that the improvement of locomotives, and locomotive questions, will not stop for any one.

An improvement may be open to attack, but it was never yet known to be utterly defeated. Mistaken judgments may raise doubts. Ingenuity may make points in opposition; but daily life shows that, against real merit, language can produce no lasting effect. The truth will prevail. We might give an instance of this in the progress that continuous brakes are making at the present time. Take a glance back a few years, when a teacher on the merits of brakes, continuous in the hands of the driver, was deemed foolish. Gradually the tide is turning, and our drivers will soon have all the retarding power in their own hands. The soone-

the better. They ought to have it as early as possible; railway travelling would be rendered much safer.

It is well known in railway circles that hundreds of hair-breadth escapes have been made, and engine-men almost terror-stricken, by reason of their not having the brake power entirely in their hands, so arranged that any unforeseen or accidental circumstance might be instantaneously met. Many engines are now fitted with brake-blocks on their driving-wheels, and the power to stop is highly appreciated by the drivers, who feel safer under such a system, and would not part with their own engine fitted with a brake for one not fitted. This is an improvement that does credit to the times. Of course we are living in a sharp age. "Onward" is the motto, and those who wish to keep up to the times require to press all good improvements into the service.

Still it is sometimes necessary to strain every nerve, cite and re-cite in the fullest manner the potent benefits to be derived from some change that would bring about many effective measures, exhibit a striking desire to fill in one more page of prudence, and infuse principles that shall acquire large influence with a moderate amount of sagacity and bring forth vigour and life. But on the railways, many a good thing goes begging for years before it is noticed. But one has only to wait. There is room at this hour for the introduction of a system that shall foster the life within, that dares noble objects, that aims high, and which shall enter into a crusade and cast down effete idols of pretended knowledge, and tear up by the root false notions.

The complete inability of the locomotive engineer to analyse the engine anatomically and physiologically is a great deficiency. It is unfortunate that he cannot

explain the laws that govern combustion, and it is a national shame that the triumphs with which he charms the world, have never to this day been properly recognised.

We are writing in a land, in a country, where the locomotive was born, reared, and shaped, until it has become a magnificent mechanical achievement of the highest order. We know it, we see it every day, and rejoice in its progress; but between the engineer and the engine we have stirring and conflicting impressions. He is not so surpassingly magnificent, and at the sight of his cleading we shake our heads. Could he who designed and built the engine not have formed his engineer in a more elegant mould?

It is not to be doubted that the remarkable advance of the locomotive has led to the neglect of the man. The builders have had to scheme and struggle to meet the growing requirements of an accumulating increase of traffic.

For half a century this has been going on; for half a century, drivers have driven in all elements, and there have appeared no improvements in their status. Well, now the present question is, Shall there be marks of intellectual distinction for them? Signs of life? Yes; rivalry between Giles a ploughman and Giles an engineer, such as may do the heart good to witness. Signs of power? Yes; such as will repel the idea that nothing can be done, that the case is solely and absolutely useless. Signs of resolution? Yes; and strength enough to draw up all the sinews and charge home on old habits and thoughts.

Who says that our locomotive engineers and firemen are not keeping pace with the engine in its progress,

and need no helping hand? Whosoever thou art—"Mentiris impudentissime"—thou liest most unblushingly.

There is a touch of reality in that keen sarcasm which circulates in the steam-shed area. The dialogue, however, is good and is sufficiently illustrative.

"Driver, what is smoke?" said a passenger. "*Smoke*, to be sure," replied the engineer. What a pity he had no knowledge of King Carbon.

The story is not worth much, because it would be a great mistake to take it for granted that our railway engineers are all in such a chaotic state. There are such cases as that indicated above, we know; but we know also that there are amongst them "patines of bright gold." There are hundreds of drivers and firemen whose lives are truthful, just, generous, and good, who know nothing whatever of natural philosophy, simply because it has as yet never been demanded of them to know, or to give any indication of their range of thought.

The spell between hard work and the higher walks in the world's great arsenal was never broken except by a few of our engine-men.

Tests of intellectual strength are unknown, and there is no inducement to self-sacrifice and reading up, to compare one's capacity with that of another.

But should it be so, think you?

We ask nothing of the mind. All we seek is toil, bodily toil.

The likeness between what is and what has been demanded is so exact, that we expect nothing. Are we justified to look on this state of things—so low—and leave it? No, we want to see the service raised,

but unless some better plan is adopted, it will remain as it is. And remain it must not. The cold and cheerless lot to book "on" duty and "off" duty, the chances of being killed and a little "siller" at the end of the week, are not sufficient. Let the men have light, more light, and the advance will remove many a grievance, push the mountains of stumbling-blocks into the sea, and leave the rough places plain.

No industry, unaccompanied with intellectual advancement, is permanent; but when connected, they are the crown and glory of life.

The human mind, like the human body, loves and delights in exercise, and its delight is written in the bright and joyous face. It is natural. Neglect of the body reaps its reward; why should not neglect of the mind? On the other hand, what is more pleasing to the mind and spirit than to meet with something *for the first time*, by search. The impression is ten times more enduring than if it came without any ability or power on our part, and is equivalent to a conquest that fosters further resolutions.

Without this vital power, life is a sham, and there is the same thing over and over again: so many miles a day, so many hundredweights of coal consumed—that makes the heart sick.

Now, if we analyse all the forms of locomotives, we shall find that this state of things does not prevail. All is moving towards a better state of things. Witness the marvellous rapidity of growth of the engine! it is the wonder of the age. Great workers in modern locomotive-designing strenuously endeavour to produce a special and a better type of engine; they give every indication that they are in earnest; pressing

onward, they change the design, they change the fittings of the engine from place to place. What for? In pursuit of better results, with the hope of attaining them some day.

They exchange opinions on this and that particular class of engine, for this and that particular work, and strain all things to practical issues. They stop not at designing even a better-working splasher; all things indicate and show there is an inseparable relation between present attempts and a desire to attain some likeness to that which is faultless.

Who is astonished at the handsome engines of the Midland and the Great Northern Railways? We should be astonished if they did not improve. And why? Because of the above? No; not that alone, but because the majestic impression, weight, and grandeur of high aim are seen with the naked eye.

Under no other conditions than the continued effort to teach the beautiful and the true, could we have reached this wonderful perfection that we see.

It is the same painstaking that the late Mr Beyer bestowed upon everything he did. It is the self-same spirit that for years moved, ruled, and guided Greek sculptors.

There is no questioning that locomotive history in the last few years has page after page of bright and happy impressions. These models, which adorn our steam-sheds and grace the rails when attached to mails, are grand products of our most gifted draughtsmen, to whom we are much indebted, whose powers have been developed in the best locomotive shops in England.

Well, what of all this? Why, the feeling that restrains the locomotive superintendent from assuming

that he has attained absolute perfection is, in many instances, confined to the drawing office; and we would like him to aim with just as much spirit, outside, to work out a model driver and a model fireman.

The drawing office and the erecting shop possess a charm such as the siren's song had for the ears of Ulysses. Let us have designed patterns outside; models of engineers and firemen on the footplate, and models of foremen in the shed.

The shed is not a saloon, nor is the floor covered with cloth, but its atmosphere is inhabited by men who are doing real service to the State ; and the more we know of them, the more worthy they appear to be of consideration.

We would have a driver taught by models, rules, and practice—the best of all teaching—and distinguished for his fulness of knowledge respecting the engine and the working of the traffic, about which there should be no doubt. He should know the history of the locomotive engine, so as to connect himself with those who have fought the battles for him. To many men in charge of engines, the beginning is enveloped in mystery, and they know nothing of those who have lived and died trying to the last to make it a success.

We propose to remedy this misfortune, and hope to show that the history of the locomotive is intensely interesting ; after that to frame a course of training composed of manual and intellectual exercise, such as shall interest our railway engineers more and more, by knowledge and work combined, in their calling ; and, finally, to show how desirable it is to reward careful drivers with certificates of merit.

PART II.

EARLY HISTORY OF THE LOCOMOTIVE.

CHAPTER I.

THE IMPOSSIBILITY OF THE LOCOMOTIVE.

IN the full glare of a locomotive furnace, it is said, if we watch long enough, we can observe every incident in railway life. Be that as it may, we know that the railway is a stage on which we may see crutches, wooden legs, artificial arms, steel hooks, glass eyes, caoutchouc jaws, silver craniums, platinum noses, and evidence of smashed ribs, in abundance.

We look with pleasure on the life of our railway engineers, and therefore it can only be a pleasure to recall the scenes of their lives—and some exciting scenes—before the engine was fairly matured and landed. Their progress was not like that of timed pedestrians; their lives were affected by many accidents; life's fairest hopes were blighted. The traditions, strange as fiction, are true.

We will follow the development of the locomotive from 1763 to 1830, to enable us to accomplish a task for the benefit of young engineers who see only in the

shed what has taken years to bring about. There is no question of the interest of the subject. The story of past years, when every incident in the progress of the locomotive was watched for and eagerly conned, is never old, and it never will be so long as the locomotive exists. The tale will be told with interest over and over again, amidst locomotive changes, but without a change.

Some of the incidents in connection with the rise and progress of the locomotive have yet to be treated with greater breadth and feeling than hitherto.

The railway system is becoming a colossal affair, and every event and incident in its history grows in interest as time moves on. Nothing like the locomotive for power, rendering us almost ubiquitous, ever was known ; and whilst we live and move in its circuit, busied with other affairs, we forget it. Indifferent to its use and its influence, we jump into the train without reflecting that at one time men ran about everywhere saying, " It is impracticable," and contemptuously smacked the whip and drove away. " Locomotives ? Never ! not if you live a hundred years ! Believe me, they are all humbug." Reform came sooner than was expected by many, brought about by a mere handful of men ;—we may almost say by one man, but that would be unfair : though it was chiefly through one man that we are now blessed with swift and cheap travelling. It must not be imagined that one man could do all this for us. It was not so ; several were necessary, but the *last* man who took the work of steam locomotion in hand was the *first* to become famous—immortal in fame.

It was impossible, with any amount of foresight, to

have foreseen the actual results. They must, therefore, have been the dealing of a Divine Providence—in respect to this *one* and last man, very clearly so.

In disposition and temperament he was likely to accomplish the last stage of the organic development of the locomotive. He possessed ability, with patience to wait; and consequently he "fainted" not, though surrounded by innumerable difficulties of a most embarrassing nature. His name was Stephenson, and his claim on our gratitude and appreciation will be clearly established when we have shown what others did and suffered in the cause before him. Of course he did not invent the locomotive. Nothing of the kind. But, when it was in its infancy, he lived by the side of the road on which the engine worked, and the question immediately before us is this: What did he do to receive all the honour he has if he did not invent it? When Stephenson first took the locomotive in hand, he did no more than other men, but how he came to do more is an interesting question of history.

> "A pebble in the streamlet
> Has turned the course of many a river,
> A dew-drop on the baby plant
> Has warped the giant oak for ever."

A small road-engine was made in France in 1763, by a native of Lorraine. He was favoured with the notice of the Government, who made an engine on his system on a larger scale, for the transport of artillery. It was under the direction of the inventor, Cugnot, and worked well for a time; but a little incident occurred by which the fortune of the inventor was changed right about. Cugnot, no doubt feeling confident in his machine, one day omitted to take all the

necessary precautions for securing as successful a trial as it was possible to make, and in rounding a corner he upset the engine; and poor Cugnot became a ruined man. After that accident, the French people locked up the engine, and left Cugnot to go a-begging. Genius! thy children, how seldom seen apart from want! The inventor of this engine was reduced to poverty; though afterwards he received a small pension from the Government. But the pension was stopped by the Revolution, and a humane lady of Brussels (can any one give her name?) relieved him until Napoleon I. granted him a pension larger than the one he had lost, though only amounting to £42 a year.

Cugnot's machine is preserved in the Conservatoire des Arts et Métiers in Paris. It has a small copper boiler, with a furnace inside, and fitted with two small chimneys; two small cylinders and two connecting-rods acting alternately upon a single driving-wheel. The combination is capital: some time after, we adopted the two cylinders, and here, in 1763, was done what Stephenson patented in 1815, namely, to connect the coupling-rod to a pin in the spoke of the wheel. Taking it altogether, it was an ingenious machine. In fact, if it had not been ingenious, Cugnot would have existed without Government aid. It is a very remarkable thing, that the inventors of duffing articles very frequently make fortunes before the inventor of a really good thing gets a copper.

It is to be hoped that the French people will remember poor Cugnot, and in some suitable way recognise his undoubted abilities. But, there! what is the use of acknowledging a man's abilities when he is dead? Fancy the most that could be done now—what of it!

The next engineer who tried to make a steam-locomotive was the inventor of the eccentric motion and the long D slide-valve, namely, Murdoch, the able assistant of James Watt, at Soho, Birmingham. Murdoch was in Cornwall when he made a model of an engine to run on the road. After he had completed the model, and was satisfied it would work properly, he looked out for a suitable place to test its performance. He was a very shrewd man and did things in the dark; and that does not always turn out well. But he would not rashly let every one know his scheme; and on this account he chose the closing hours of the evening for testing it. Should he fail, of course no one but himself need know of the failure; if he succeeded he could make everybody know of his success the next night. According to the state of civilisation at Redruth at that time, stories of ghosts and kidnappers were credited. Old people of the place believed in the former, and not in the latter; and the young people believed in the latter and not in the former.

However, Murdoch made up his mind to try his engine on a piece of straight road near the churchyard, In this walk he set down a model of his locomotive. It looked like a child's toy; but it was a great idea, and a great invention.

The scene near the churchyard on that dark night when Murdoch was about to introduce a locomotive to Englishmen, was a memorable one, worthy of the artist's powers. It was not only dark, but still; the young folks of the village were asleep, and the old people were enjoying their firesides and pipes; as for the parson, he was in his study.

The hour had come, and the man, Murdoch, took from under his coat a tinder-box and flint; he struck the steel and kindled a fire under the engine.

In a few seconds the small spirit-lamp was burning, steam was got up, and the trial was found satisfactory. In another minute Murdoch tried it again, and the event of the evening took place. There, in the long gravel walk, the engine steamed up and down, puffing away and lighting up the sides of the road by its fire; cast on each side of the road was its own image. In the midst of Murdoch's glee and happiness, the worthy pastor left his study, contemplating going as far as the town. He entered the long walk where the engine was running. He was a worthy minister, in simple civil costume, stepping lightly, cheerfully, and confidently, for by God's grace he was no coward.

In virtue of his sacred office, he could not for one moment entertain the absurd idea that prevailed in the heads of the villagers: the idea of a ghost. He had all his life repelled such an idea, and believed in no man's story. "Seeing's believing," and what he saw he had faith enough to believe in. He entered the long walk, and although prepared to die, he offered gold, and blood even, if he could but be restored to the bosom of his family, for he had encountered the devil, who was loitering near the churchyard. The vicar had no revolver to cock, and therefore had recourse to gestures when Murdoch with a lantern faced him. It is not, said Murdoch, the evil one in *propria persona*, but the *first* locomotive.

It is a most interesting picture.

Whether or not the minister persuaded Murdoch to "drop" his locomotive tricks cannot be known, but

one thing is quite certain: he made no more experiments nor did he embody his ideas in locomotive improvements afterwards. He remained with the Soho firm, and did uncommonly well as an inventor of engine gear.

The next man to become a locomotist was Richard Trevethick, an apprentice of Murdoch; it is very likely that the scene at the church put an end to Murdoch's views respecting locomotives, and it was not long afterwards that Trevethick dropped it too; though it answered better in his hands than in his master's.

CHAPTER II.

THE COAL TRAMWAYS.

BUT before we enter into Captain Trevethick's troubles we must, to make our history complete, make a statement, not a very long one, but one that will greatly interest young beginners; and that is—railways, or tracks of rails called tramways, were in use more than a hundred years before the locomotive ran on them. The trucks were drawn by horses all that time before any one thought of working them by steam.

Having made that statement we can make another of equal importance, and that is, it was Richard Trevethick who first made an engine to run on rails.

This was at Pen-y-darran Iron Works, in South Wales.

About the year 1670, railways were made at Newcastle-upon-Tyne for transporting coals from the coal-pits to the shipping on the river Tyne.

About this time, coal became popular for household consumption in lieu of wood in the metropolis, and of course the demands for coal gradually increased on the colliery owners. They became impatient at the slow delivery of the orders, which were carted to the Tyne from the coal-pits. Necessity became the mother of invention. After some consideration, wooden rails

were laid down. It was a grand idea, and the man who first conceived it should have been immortalised. These rails consisted of straight pieces of timber laid down and embedded in the road. The feat is simple enough; but the invention was one of the highest order. Go to; invent and make thy fortune, build mansions, ride in a carriage, dine with great men. It is all very simple. Now if, after thirty-six hours' hard thinking, you have not found out how to do a simple thing with perfect ease, give inventors their due, and think how great a man the inventor of wooden rails must have been. Give inventors the laurels they earn.

These wooden rails were laid on wooden sleepers; and when they made signs on the surface of wearing out, small scantlings were laid over the holes or dilapidated portions.

They were, in plainer words, patched like an old shoe. This patching was a marked improvement, so much so that patches were applied where they were not needed; and finally, a road was laid consisting of two wooden rails one upon the other; the under rail was of oak and the upper one of fir wood.

This was called a "double road," and would not be so understood nowadays. These double roads, as they were called, had many advantages.

The upper or top rail, after it was worn out, or split, or broken, could be renewed without destroying or materially disturbing the under line proper. It made, besides, a much stronger road, and consumed less timber and less money to keep it in order.

The sleepers, at first, were exposed, and the horses knocked them to pieces with their feet; until a sharp man threw out a suggestion that they would be better

if covered up with ballast, and thus saved them from unnecessary waste.

At the same time the waggons were in keeping with the times, but collisions appear to be like Shakespeare's plays, for all time. A smash now and then occurred, that made the hills rattle again, waggons were piled up in the air, and the coal was scattered in every direction. Sometimes the waggoner or waggoners were found under the débris by screaming women. It was not all happiness then on the railways. What is the price of a glass eye or a wooden leg compared to the loss of a member? A mutilated body for some men, if it be only an eye or a leg, has broken the heart.

The colliery companies in many instances were to blame in not having sufficient available brake-power and men.

The undulating surface of the country over which these lines passed was followed in their construction, excepting in the case of very steep ascents. Where any declivity or incline more than commonly steep occurred, it was made a "run" of.

Down these banks the pitch-in would happen. The waggoners stuck to their brakes like men; rude forms of brakes, which sometimes failed by being out of order, and many times by the rails being wet; and notwithstanding all the dexterity of the waggoners, the trips sometimes ended badly for the waggons.

These were the good old days when there were no cast-iron rails to be broken and replaced.

It has happened, in those days, that waggons have been left on the incline, scotched with a lump of hard clay, when the clay gave way, and the waggons commenced to run. The waggoner has been dozing by the

fire, with his ears closed, until the "mother" shouted out "Jim, the waggons are loose." Jim in a trice has got out with the ropes across the road: but Jim's ropes were of no use; the waggons had a "way," very much as waggons have on an incline,—a nasty way. Jim's ropes snapped like threads, and in a crack Jim was up to his neck in muck. He had tried to stop the waggons, and he could not; so they must go into the end of the next waggon, or into the sea. Were these good old times?

These break-aways frequently ended in sad disasters, and keen investigations were made with the object of preventing them. The brake-power it was found was in fault; and, it may now be asked, when will this end?

Brake-power is the one thing needed; but we never have it in time; it comes too late, after the shock. At that time the knowledge of friction was imperfect; and no one thought of applying brake-blocks to wooden wheels; hence, the hind wheels of waggons were of cast-iron, to which the brake was applied; and the front wheels were made of wood, to which the blocks were not applied.

It is exceedingly interesting thus to trace the steps by which the improvements in railway rolling-stock have been achieved. Our ancestors feared to venture where we have found no danger at all; but, on the other hand, it is by doing what they were shy of attempting that we have attained to our superiority.

They had all the material,—wood, iron, copper, and steel. We have no more, but we have experience, and that is all in all; experience inures us to strife, accustoms us to command, and animates us to remove apparently immovable obstacles that impede

our course; yet, painful as the fact is, by the suffering, temporary and permanent, endured by the men whose industry and ingenuity have brought inestimable improvements to the front, and who have in many ways enlarged the sphere of labour by creating new work, by that suffering the men themselves have in many instances been ruined.

Experiments were made by the colliery owners with brake-blocks applied to all the wheels of the waggons. The results were favourable, and they brought about the reform that was urgently required. Brake-power! brake-power! It is a singular thing that scarcely any improvement is made at once. We perceive what is required, and yet we refuse to act until we hear a voice calling to us, "Put on the brake." It is so throughout society.

A man will persist in his ways; he is called back again and again; sometimes he has half a mind to act, his hand is on the brake-handle; but he hesitates; presently he finds he is going in the wrong direction more rapidly than ever. "Put on the brake," "Put on the brake." "What has happened?" cries the wayward one. "Put on the brake," "Put on the brake." The signal is at danger. "Where are you coming?" shouts the signalman. "Put on the brake," "Put on the brake."

The railway companies have been called upon to put on the brake by the friends of the killed, and by the sighs of the wounded. The public signal showed danger, and the directors saw it; but they had run by them so often that they were not answered. They noticed the danger, and drew up to it gently. But at last the chief signalman is heard, in earnest, calling

out, "Put on the brake," "Put on the brake." The warning was a reminder that danger-signals must be regarded.

It is the wisest thing in the world to apply a remedy at once for the complaint; it is reckless to postpone it even for a season.

Turning again to the narrative. After the brake-blocks were applied to all the wheels, there were fewer accidents; but it was felt that wooden rails were defective, the service they did was very limited compared with the cost of maintenance. Well, the matter attracted attention, as all defective systems should, and the result was the introduction of iron roads by Mr Reynolds of Colebrooke-dale, Shropshire. The application of metallic surfaces to the wooden rails was, however, at first productive of much mischief and created much opposition. It is always thus with new prospects. The opposition in this instance was caused really by the want of more brake-power. It was not regarded from that point of view; but from one from which the opposition party could find their advantage. This is caused, said these people, by your rails having reduced the adhesive power, and the brakes are comparatively ineffective.

These savages, having made up their minds to oppose the introduction of an improvement, could not see that brake-efficiency was the next question. For, in the course of improvement, there is no going back. It had been found that iron rails were better than wooden ones; and that discovery was sufficient to settle the question. If the improvement elicited the deficiency of something else, then a remedy had to be sought in advance.

About the year 1770, the surplus force of gravity of the load descending one plane, was employed in dragging the empty waggons up the ascending plane.

This was a valuable means of saving horse-power; and it effected, besides, a great saving, in following the undulations of the country.

The idea belongs to the north of England, and was no doubt suggested by the action of the steam-engine winding minerals from the pits by means of ropes coiled round barrels.

The permanent-way had been improved, as well as the rolling-stock; tramways became paying concerns. Pace was quickened considerably by the introduction of iron for wooden rails, and there was on the whole a general impulse to advance. The rising popularity of the railways gave marks of progress visible all over the country.

Ingenious men ran to and fro; some to the Patent Office, and some to the Society of Arts, to ventilate their ideas, advance their projects.

Questions pertaining to railways took precedence of all others, and the atmosphere was full of railway talk, or rather tramway talk. Even a Committee of the House of Commons sat to report on tramroads.

This was about the year 1776, before Stephenson was born, and when Watt was forty years old and had been in partnership with Boulton three years.

Inventions relating to railways poured into the patent offices: "A patent plate-rail;" "A patent brake;" "A patent wheel." One man patented a railway which was to be above ground supported on pillars—completely level—the pillars to be lengthened

or shortened to suit the ground level. It was not a bad idea, but it fell through.

But all matters connected with railways received their due share of attention at the time referred to. The result was, amongst other things coming to the fore, a stone sleeper instead of a wood sleeper.

The impetus given to the pig-iron trade, to rock-blasting and pick-axe work, was surprising.

"Come and dine with me," wrote a well-to-do squire to an ironmaster. "Can't," replied the puddler; "making rails for a railway—blast-furnaces full go."

"Come and dine with me," wrote the squire to a colliery owner. "Can't," replied the collier; "making a new railway—immense demand for black diamonds."

"Come and dine with me," wrote the angry squire to a stone-mason. "Can't," replied he; "stone is in great demand—blasting from morning to night."

The squire embarks his capital in railway enterprise. The enthusiasm spread far and wide, amongst all classes,—men of science, merchants, manufactories, even Tommy shops, all were stirred to their inner-most fibres.

Cities, big and little, argued, discussed, disputed, or applauded the railway mania. It was talked of over sherry in private bars, and by boatmen in dingy taps.

The run on the Patent Office increased, and the best thing out of many hundreds of proposed plans was a cast-iron plate-rail with an upright ledge (see Fig. 1), which was laid on stone sleepers. The plate was three feet long, the flange one-and-a-half inches high, and the sole or bed on which the wheels rolled three-and-a-half or four inches wide and three-quarters of an inch thick. The stone blocks weighed about 120 lbs. each.

In the year 1801, the rail was much improved. There were so many defects about the above-noted plate-rail, that ingenious men set their minds to work to scheme something else.



Fig. 1.—Cast-iron Plate-rail.

Stones and dirt accumulated on the sole or bed of the plate-rail sufficient to throw the waggons off, and the sharp-raised edge was dangerous to the horses. Further, there was a great deal of frictional surface about the plate-rail; and lastly, it was not a strong rail. Hence the invention of the edge-rail (Fig. 2). The real origin of this rail goes back to the days of the wooden rails, which were slightly rounded, and the flanges on the wheels projected downwards over the side of the rail to keep the waggons on the road; but this rail was abandoned for the plate-rail: the flange was transferred from the wheel to the rail.



Fig. 2.—Cast-iron Edge-rail.

The plate-rail did not suit, and out came the edge-rail,—a better form of rail altogether. The oval presented itself as the best plan to correct the faults of the plate-rail. The wheel for the edge-rail had a concave rim.

This was no visionary scheming indeed, for it narrowly missed the accomplishment of a great discovery. It displays unquestionably great inventive talent.

At this time, 1801, much favour was shown for the

improvement of the internal communications of the country by using iron railroads. Every circumstance relating to them teems with interest, not only to the historian and the philosopher, but also to the mechanic.

Up to this time, 1802, there was no locomotive, but here we see a tolerably good road for it.

CHAPTER III.

RICHARD TREVETHICK.—THE FIRST WORKING LOCOMOTIVES.

WHO will be the first to introduce the engine? Answer Richard Trevethick,—The Great Trevethick,—Captain Trevethick. The philosophic poet Darwin was right when he undertook a prophet's mission :—

> " Soon shall thy arm, unconquered steam, afar
> Drag the slow barge and drive the rapid car."

Murdoch, we must remember, gave up the locomotive, and his pupil Trevethick carried on the business.

In 1802, a patent was granted to Trevethick for a high-pressure steam-engine,—the first high-pressure engine in the world. Its advantages lay in its simplicity, its cheapness of construction, its compactness, and the force that could be exerted by it, enormously greater than what had then been applied to any piston. It is stated that the pressure was even from seventy to eighty pounds per square inch.

But this sort of novelty frightened the people,—at least the bursting of the boiler did. Watt would not meddle with high-pressure steam, and was not he an authority? This nearly extinguished Trevethick.

He had forsaken now the well-beaten path which his contemporaries trod, and had done something that

others with all their fame either could not or would not do, and practical men looked askance at him.

But the engine was simple and beautiful. Connoisseurs jeered, because in the specification of the patent he stated that it would either run a coach or drive a sugar-cane mill. But his bold deviation from the beaten track brought to him the experience of a good deal of trouble; but it brought with it also immortal fame. High-pressure steam and Trevethick are inseparable.

To pass lightly over this period, and indifferently by this machine, would be distasteful. There is a

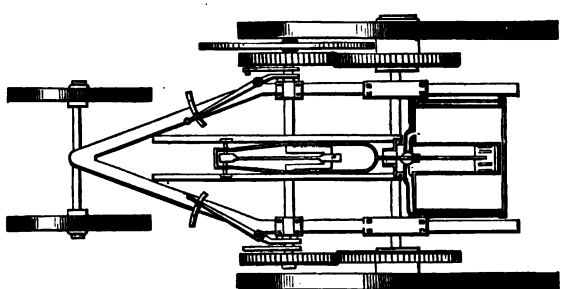

Fig. 3.—Trevethick and Vivian's Road Locomotive. Plan.

spell about that early era that makes it desirable to linger over the specification, and to examine the design of the engine.

What Boulton was to Watt, Vivian was to Trevethick, his cousin—the bank. The patent was taken out in the name of Trevethick and Vivian (Fig. 3).

The engine exhibits a deal of skill in combination never before seen. The extraordinary character of the motion is a treat in itself, being well adapted to produce the intended results.

If we examine it, and compare it with the engines

constructed some years afterwards, we shall have cause to admire the superior genius whose mind shone in every part. The engine had one horizontal cylinder let into the boiler, which was in the rear of the hind wheels of the vehicle. The motion of the piston was transmitted to a counter-shaft, from which, through spur-wheels, the axle of the driving-wheels was worked round. The piston was forked immediately outside the piston-gland and carried forward, supported by slide-bars and a cross-head. The extension of the forked rod left room for the motion of the extremity of the crank to work between the forks. The position of the crank is very remarkable indeed, being fixed midway of the stroke, and working two spur-wheels at each end of the axle, that gave motion to two corresponding wheels fixed on the nave of the two driving-wheels of the carriage.

The wheels on the crank-axles could be thrown out of gear at any moment, together or separately, by levers.

A fly-wheel was employed to carry the engine over the centres. Now, this was a very simple and compact machine. The pumps were worked by springing levers, which were acted upon by a lever on the crank-axle. The regulator was worked in the same way.

At that time cocks and valves were worked by various well-known methods, such as the plug, with pins or clamps striking on a lever. Sometimes they were worked by means of a ratchet, and by this means a cock was worn more uniformly and regularly than when its traverse amounted to only a half-turn.

Altogether, the work displayed much talent and ingenuity for arriving at a simple effect, namely, to give motion to wheels of carriages.

The external periphery of the wheels was smooth; but they were provided with "heads" that could be raised to "rough" them, and augment the adhesion, or hold upon the ground, in case of a heavy load, and when the driver wanted to "dig" into his work.

The engine was provided with spur-wheels, to accelerate the speed, and the fire was urged by bellows worked by the motion.

We see that all this occurred in 1802:—horizontal cylinders, cylinder let into the boiler, and the motive power obtained through spur-wheels. It is essential that this should be noticed, because other inventors departed more or less from the plan. Even Trevethick himself did so; and yet at no period in the history of the locomotive engine have Trevethick's ideas been altogether put aside; there remain the use of high-pressure steam, and the employment of the horizontal cylinder and the crank-axle.

When his engine was finished, Trevethick astonished the natives—not the parson—about Cornwall; and, elated with success, he turned his eyes and his engine towards London. He shipped himself and the engine at Plymouth, and on the ground now occupied by the Euston Station, he "took the cloth off," and at once collected a crowd to view the Trevethick "dragon." He ran it for a few days, and in a carriage behind it carried many people; those who were fortunate enough to get a ride considered themselves lucky.

The excitement, however, was of short duration, for some one offended "Captain" Trevethick, and he took the engine away. It must have been trying, because he had brought the engine all the way from Cornwall to exhibit it. No doubt at that time it was rumoured

that the streets of London were paved with gold, but he found reason to think such was not the case. Many persons besides engineers and inventors have found that to be a false supposition.

Let that be as it may, there is no doubt that Trevethick, in London, picked up an idea quite new to him, which gave additional impetus to his extraordinary mind. But he appears to have kept it in reserve, as Murdoch did when he selected the dark hour of the night to try his locomotive at Redruth; and who can tell but the frightening of the worthy vicar in the dark turned the course of his intended exhibition of genius into an entirely different channel.

How often do we see the projects of clever men turned aside by simple circumstances.

At the time with which we are now interested, steam-carriages that could work on ordinary roads at moderate speed would have met with popular favour. Even George Stephenson's first engine did not travel faster than a horse could walk. But Trevethick was a man of high spirit.

Eminent mechanics and enterprising men will yet apply their minds and talents to road-locomotion, which has not yet received all the attention it deserves.

What could be better or pleasanter than a trip outside a locomotive carriage—a road "Pullman"—all the way, if you choose, from London say to Wolverhampton, in the summer?

It is not impossible that the turnpike road, commonly called the King's Highway, will yet roll up its dust behind the "horse" that requires no rest, and the trip may be performed in four or five hours at the utmost.

Now the idea that Captain Trevethick picked up in London was this:—when he was in the metropolis, the Wandsworth and Croydon tramway was popular; much betting was going on as to what *one* horse would pull, and it was found by actual experiment to be surprising.

If Trevethick, instead of taking his engine suddenly away as he did, had arranged to back his engine against the horse, and made it his business to adapt his steam-carriage to the tram-road, it would have been a grand stroke of business, and he would have seized the opportunity of making a locomotive engine a "cockney" success. It is thought he had intentions, prior to his visit to London, of running his engine on the rails, but it is a fact that he did not, for some time afterwards, attempt such a thing.

He knew a great deal, no doubt, but there was one thing he did not know then, and that was, that a smooth wheel on an equally smooth rail would act with sufficient force to draw a weight behind it satisfactorily.

The general notion in the minds of most engineers was, that with smooth wheels and smooth rails there would be no "go" in the engine. But at the time to which we refer no one had tested the notion, and when it was tested it turned out to be purely imaginary.

The truth was wanting, and the result teaches us to test all things.

We next find Trevethick at Pen-y-darran, at some ironworks in South Wales, where he was erecting some blowing engines; and at this place, where there was a railway, he conceived the idea of placing an engine on it to work the waggons instead of horses.

The engine (Fig. 4) was made in a blacksmith's

shop, and, strange to relate, he put the motion on the top of the boiler, instead of keeping it down, as he had done in his steam-coach. He made also another departure from his original practice, by placing the cylinder vertically instead of horizontally, as he had done at first. Now his first attempt was a perfect engine, and it is impossible to understand what he thought of gaining by such radical alterations. If he had retained his old engine, taken off the body of the coach, and remodelled the framing to suit a tramway,

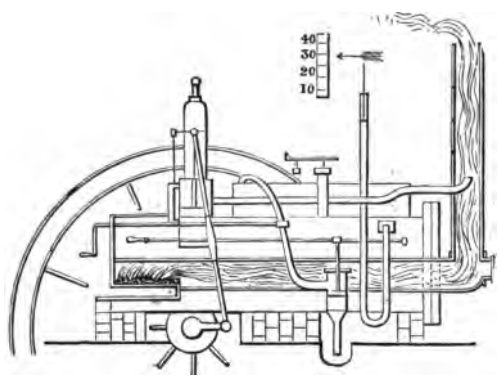

Fig. 4.—Trevethick's Railway Locomotive.

he would have had a very neat and compact locomotive.

But it was not to be.

The minor arrangements of this, his second engine, have been variously described and illustrated by different authors, owing to the circumstance that Trevethick built several engines; and we may be positive that, with a mind like his, each would possess some essential improvement upon its predecessor.

Trevethick's *first* railroad engine had a cylindrical boiler set in brickwork; it had a syphon mercurial gauge, and a steel-yard safety-valve—articles that belonged exclusively to the stationary-engine trade.

The lower part of the cylinder was immersed in the boiler, and the exhaust was conveyed through a cistern to the chimney. By means of this excellent arrangement great economy of fuel was effected, for much heat must inevitably have been drawn from the steam by the cold water that surrounded the exhaust-pipe. This is a very simple plan for saving fuel, and yet, in this country even, where coals are so expensive, the waste steam is lost, notwithstanding the thousands of units of heat which it contains. It is a curious fact that although Trevethick put the exhaust-pipe in the chimney, its well-known effect does not appear to have been perceived by him, for he used fanners for urging the fire. There is the possibility that, owing to these fanners being worked by the crank or the piston, when the engine was moving, the fanners would receive all the credit, whereas much of the increased production of steam was no doubt due to the blast from the exhaust-pipe. Moreover, Trevethick, with the blast-pipe in the chimney, could not have reaped much benefit, unless the end of the pipe had been turned directly upwards, in the centre of the chimney. And again, the chimney having been of such a large section, it must have required "something" to exhaust it. The upper end of the piston-rod was furnished with a cross-bar or cross-head, placed in a direction at right angles to the boiler, and also to the piston-rod. The cross-head worked upon two perpendicular rods, fixed to the sides of the boiler, and parallel to each other. To the ends

of the cross-bar, or more properly the cross-head, the connecting-rods were attached, one on each side of the engine, with their ends coupled to cranks on the axle to which they were fixed. This axle was beneath the boiler, and right under the cylinder, with a fly-wheel on it. The engine worked pretty well, but there was no sympathy for it, and there were few people who would not have rejoiced at its failure, for a number of persons were interested in the traction of the waggons by horses, and the sympathy of the mining population was not in favour of machinery. Many persons, who should have known better, had wagers pending that the engine would never answer.

The animus was real and stern. The engine broke tram-plates and hooks; at last it broke a great many, and finally it ran off the metal into a ditch. "Abandon! Abandon!" was the cry. And poor Trevethick, heart-broken, gave up all thoughts of the locomotive, and turned his feet towards Cornwall, where for a time he found it was more profitable to empty drowned-out pits. Many years after, when Robert Stephenson was residing in Columbia and on the point of returning home, Dr Smiles informs us that Robert arrived at the port of Cartagena, wearied and waiting for a ship, and while sitting one day in the large, bare, comfortless public room of the miserable hotel at which he put up, he observed two strangers whom he at once perceived to be English. One of the strangers was a tall, gaunt man, shrunken and hollow-looking, shabbily dressed, and apparently poverty-stricken. On making inquiry, he found it was Trevethick, the builder of the first railway locomotive! He was returning home from the gold mines of Peru penniless. He had left England

in 1816, with powerful steam-engines intended for the drainage and working of the Peruvian mines. He met with almost a royal reception on his landing at Lima. A guard of honour was appointed to attend him, and it was even proposed to erect a statue of Don Ricardo Trevethick in solid silver. It was given forth in Cornwall that his emoluments amounted to £100,000 a year, and that he was making a gigantic fortune. Great therefore was Robert Stephenson's surprise to find this patent Don Ricardo in the inn at Cartagena, reduced almost to his last shilling, and unable to proceed farther. He had indeed realised the truth of the Spanish proverb, that "a silver-mine brings misery; a gold-mine ruin." He and his friend had lost everything in their journey across the country from Peru. They had forded rivers and wandered through forests, leaving all their baggage behind them, and had reached thus far with little more than the clothes upon their backs. Almost the only remnant of precious metal saved by Trevethick was a pair of silver spurs, which he took back with him to Cornwall. Robert Stephenson lent him £50 to enable him to reach England; and, though he was afterwards heard of as an inventor there, he had no further part in the ultimate triumph of the locomotive. But Trevethick's misadventures on this occasion had not yet ended, for, before he reached New York, he was wrecked, and Robert Stephenson with him. This is the account sent by the latter to his friend Illingworth:—

"At first we had very little foul weather, and indeed were for several days becalmed amongst the islands; which was so far fortunate, for a few degrees

farther north the most tremendous gales were blowing, and they appear (from our future information) to have wrecked every vessel exposed to their violence. We had two examples of the effects of the hurricane, for as we sailed north we took on board the remains of two crews found floating about on dismantled hulls. The one had been nine days without food of any kind, except the carcasses of two of their companions who had died a day or two previously from fatigue and hunger.

"The other crew had been driven about for six days, and were not so dejected, but reduced to such a weak state that they were obliged to be drawn on board our vessel by ropes. A brig bound for Havannah took part of the men, and we took the remainder.

"To attempt any description of my feelings on witnessing such scenes would be in vain. You will not be surprised to learn that I felt somewhat uneasy at the thought that we were so far from England, and that I also might possibly suffer similar shipwreck; but I consoled myself with the hope that fate would be more kind to us. It was not, however, so, for on voyaging towards New York, after we had made the land, we ran aground about midnight.

"The vessel soon filled with water, and, being surrounded by the breaking surf, the ship was split up, and before morning our situation became perilous. Masts and all were cut away to prevent the hull rocking; but all we could do was of no avail. About 8 o'clock on the following morning, after a most miserable night, we were taken off the wreck, and were so fortunate as to reach the shore. I saved my minerals, but Empson lost part of his botanical collection.

"Upon the whole we got off well; and had I not been on the American side of the Atlantic, 'I guess I would not have gone to sea again.'"

Several years had passed after Trevethick had given up the locomotive before any one attempted to renew the experiment, and it was not until the year 1811 that it was noticed by Mr Blenkinsop, of Middleton, near Leeds; and, fortunately, from this time the locomotive gradually grew in favour with every one; not, however, without many ugly failures. It was displaced and replaced a good many times. We have arrived at a very trying period, full of interesting incidents, on which hung the very life-breath of the locomotive engine.

CHAPTER IV.

THE RACK-RAIL AND THE CENTRAL CHAIN.

THE simple and beautiful engine patented by John Blenkinsop is represented by Fig. 5. The specification was for "certain mechanical means by which the conveyance of coals, minerals, and other articles is facilitated, and the expense attending the same rendered less than heretofore."

The boiler, which was mounted on a wooden frame, had a single wrought-iron tube through its centre; the tube was carried out at the front, and turned upwards to form the lowest portion of the chimney. The frame supporting the boiler stood upon four wheels without teeth, and rested immediately upon the axles. This was a novel affair, and it shows very clearly that progress was being made. Then there was a still more startling improvement, in the employment of two cylinders instead of one; doing away with the fly-wheel, as in Trevethick's engine. The two cylinders, each eight inches in diameter, were let into the top of the boiler, and in a vertical position, with the slide-bars attached to them. The piston-rods were connected by cross-heads to the connecting rods, which descended at each side of the boiler, and were joined by cranks which were placed at right angles to each other.

Consequently, the two cranks on the first shaft were horizontal, at their greatest leverage, at the time that the cranks of the other shaft were passing the centres. This is one of the best mechanical combinations to be found even in the locomotive of to-day.

The engine was moved along the rails by means of toothed gearing. The two small pinions on each side of the engine gave motion to a larger toothed wheel, fixed

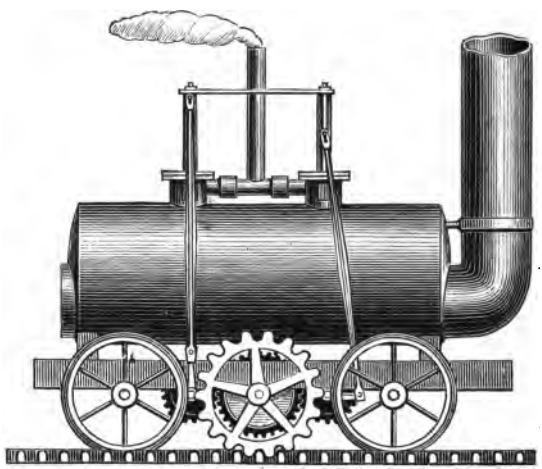

Fig. 5.—Blenkinsop's Engine, with Rack-rail.

on the left-hand side of the framing so as to work into a rack laid along one side of the railway. The piston moved the connecting-rods, the connecting-rods moved the pinions, the pinions drove the cog-wheel, and it gave a progressive motion by rolling in the rack. It was throughout a remarkable engine, but it had one great and damnatory effect about it,—that was, that all the driving power was applied on one side of the

engine. There was only one rack; if they had put two racks down, one on each side of the engine, it would have saved all the expense and grumbling that was caused by the engine breaking the racks, she could not be "off" from it. The power being applied on the one side only, had a tendency to force the flanges of the wheels against the rails, by which means extra friction must have been produced. By means of the rack the engine was enabled to draw the heaviest loads that had ever been conveyed, and, with all the disadvantage of making a hundred or two of broken racks now and then, the machine was a beautiful invention. It was a great stride in the right direction. What if there were objections and difficulties? and suppose it was an expensive affair, this engine introduced locomotion in the north of England, where it became, in the hands of a few men, a great motive-power. But it was due to Mr Blenkinsop's enterprising spirit that the engine in the ditch at Pen-y-darran came again to life. He gave it the breath of life a second time; he was a father to it; he put up with its expensive and troublesome ways, and its failings he covered. Its apparent success determined others to follow in his footsteps. Invention was at work, and, amongst others desirous to grapple with locomotive matters, first on the list appears Chapman, who, in 1812, the year after Mr Blenkinsop started his engine, took out a patent; and patents then were patents indeed, costing about £140. He undertook to facilitate the means and reduce the expenses of carriage on railways and other roads. He proposed to do all this by means of a chain extending along the centre of the railway. The chain was used to pass

round a grooved wheel, or barrel, fixed upon or behind a carriage, so that the engine was dragged along by its turning the chain-barrel. The scheme was clumsy and expensive, and was not regarded with much confidence. Still, there were some good points about it which, if we mistake not, are worth noticing.

Allusion is made, in Chapman's specification, to a common winnowing-machine to force a current of air under the fireplace. This is the first instance in which a "barn" machine was adopted for helping the locomotive. But the locomotive needed every possible help at that time.

Chapman's boiler, if we are not in error, was different from Blenkinsop's, for it was constructed with a double or return flue, of the type known as the Trevethick boiler. Two vibrating beams were worked by the piston-rods. It was in fact the first locomotive fitted with a beam and parallel-motion. The stationary engine had walked out of the engine-house. One cannot help thinking, after viewing the engine of Chapman, how near Trevethick was to perfection with his first engine, the very first which he brought to London. As we proceed we shall become more and more convinced that it was a marvel of simplicity. Here we are, ten years later, going no faster, but becoming ten times uglier. This engine was working in December 1812. There is one other point about this engine, and that is a very important one. The power of the engine was applied through the medium of a train of toothed wheels, under the body of the frame, that was supported by eight wheels. The eight wheels were the running wheels, *with smooth faces.* It is said that these wheels slipped on the rails. Now

Blenkinsop's could not slip, on account of the rack. Then a comparison of the two engines is worth making, and the difference is well worth seeking for. The imaginary difficulty that smooth wheels had not sufficient "bite" was the bugbear that frightened everybody. Here is Chapman with smooth wheels, with a motion all complete to drive them, encumbering himself with a chain and a barrel, to overcome the fictitious difficulty of the want of adhesion between the rail and the wheels! Why, if he had pitched the chain and barrel into the ditch, he would have had in 1812, when his engine was at work, the best locomotive in the north of England. Yes, the best engine in the world. He would, in fact, have had the same engine as Hedley brought out the next year. What proved a stumbling-block to the Chapmans—there were two brothers—proved a nice point for Hedley to decide by experiments. But before going fully into the experiments made by this highly ingenious person, who to a certain extent paved the way for Stephenson, we must notice in passing the mechanical traveller (Fig. 6). It came out in 1813,—dates are of great value. The contriver was Mr William Brunton, of the Butterley Iron Works, in Derbyshire. It consisted of a combination of levers, the action of which resembled the legs of a man when walking. The single cylinder was placed horizontally on the boiler, and the piston was attached to a leg, with a loose foot jointed to the leg. By the front stroke of the piston-rod, the leg being firmly fixed, the engine was moved ahead, dragging the other leg into position ready for the return stroke. This part of the contrivance strongly attests the ingenuity of the contriver: by referring to the drawing

it will be seen that on the lever *a b* a rod, 1, 2, 3, is attached, running out upon the top of the boiler. From 2 to 3 it is fitted with teeth, which work into a cog-wheel. Working horizontally on the opposite side of this cog-wheel, a sliding-rack was fixed similar to 1, 2, 3, which, as the cog-wheel is turned round by the sliding-rack 2, 3, was moved backwards and forwards. To the end of this sliding-rod was fixed the other lever *d e* at 4. When, therefore, the sliding-rack

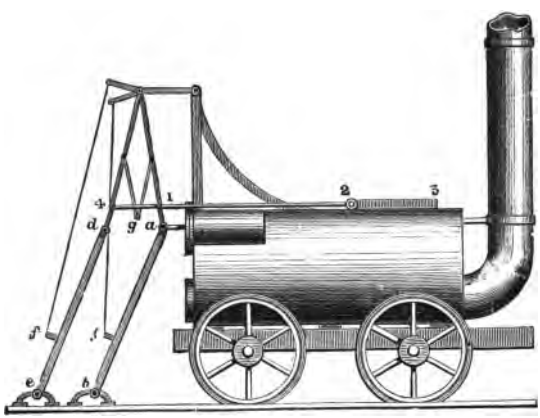

Fig. 6.—Brunton's Locomotive.

was moved forward in the direction 3, 2, 1 by the progressive motion of the engine, and when the piston-rod was at the farthest extremity of the stroke, the leg *d e* was brought close to the end of the boiler; the piston was then made to return in the opposite direction, moving with it the leg, *a b*, and also the sliding-rack 1, 2, 3; the sliding-rack, acting on the toothed wheel, caused the other sliding-rod to move in the contrary direction, and with it the leg *d e*. When-

ever, therefore, the piston was at the extremity of the stroke, and one of the legs was no longer of use to propel the engine forward, the other, immediately on the motion of the piston being reversed, was ready in its turn to act as a fulcrum, or abutment, for the action of the moving power to secure the continued progressive motion of the engine.

The boiler was of wrought-iron, 5 feet 6 inches long, and 3 feet in diameter. It was "cracked" up to bear a pressure of 400 lbs. per square inch. The cylinder was 6 inches in diameter, with a stroke of 24 inches.

When the engine was being tried the driver got drunk, and, owing to the pressure being too much for the boiler, she flew all to "bits," and killed him and two or three others who were standing near, scalding a dozen or more folks most severely, and frightening many others nearly out of their wits. If this engine could properly have been called a locomotive, she would be said to have been the first to blow up.

CHAPTER V.

WILLIAM HEDLEY AND THE PLAIN RAILS.

WE will now retrace our steps to Wylam, on the Tyne. In connection with a colliery there, the property of Mr Blackett, a man of considerable engineering ability, there was a railway, characterised by severe undulations, worked by horses. At one time wooden rails were used on the line, and the horses drew one waggon each. About the year 1808 cast-iron plate-rails were substituted ; then one horse could draw two waggons.

The interest does not centre so much in the horses, or the waggons, as in this particular line of railway itself ; a railway immortalised by accident, where the locomotive was to be baptized. The locomotive received a name here and a local habitation ; and it was here that it established its right to existence, and to be improved, and helped on to maturity. To explain how this happened is our next business.

Trevethick was written to in 1809 by Mr Blackett, who had met him in London some time before. The subject of the correspondence was a locomotive engine. Trevethick, in reply, stated that he was too busy, and he declined all "truck" with the "thing." He had had enough, no doubt, of locomotives in South Wales.

But this was not all, for Mr Blackett, as early as 1804, obtained the drawings of an engine from Trevethick, and took them to Gateshead, where he expected to repeat the Pen-y-darran performance in the north. Trevethick's engine was in the ditch. Well, the mechanics in the north, with native pride, "chuckled" over the new engine as it progressed towards the finish. But, alas! it was born under the wrong planet. The rights of the story were never told. All that was ever known outside the foundry gates was, that it ran for a little within the gates, but proved to be worth nothing. It never ran outside the yard. Its nose was put up the tuyere of a cupola at an iron foundry in Newcastle, and at "blowing" it appears to have done very well. It is not a matter of surprise that Trevethick said "no" to any more locomotive business: he could see his favourite in a ditch, and another child of his with its nose in a Newcastle cupola. His was a cruel fate. Mr Blackett, not having got a satisfactory answer from Redruth, applied to the most eminent engineers of the day, who told him that the idea of an engine to draw coals was chimerical, physically impossible. "Look," said they, "at the fate of the locomotives in South Wales!"—supposed to be sufficient evidence against locomotive power.

Nothing was done; but the price of hay and corn went up in 1811, and colliery proprietors looked around them.

The war continued, for Napoleon was in the saddle, and England on the watch. So, to economise in such times was the only way to get along, and everybody had the option of carrying out economy according to his own views. At the Wylam Colliery they tried to

replace the horses on the railway. What? with locomotives, of course! No. Bullocks? Yes; with bullocks. They were shod with iron, and worked for some time on the railway. The creatures were docile in harness, cheaper than horses, but after a short trial it was decided to turn them into beef-steaks. But there was one redeeming feature in this experiment, and that was, the bullocks were sold for more money than they had cost.

The use of horses was ruinously expensive, and the construction of an engine to convey the waggons on the railway as a substitute became more and more the question of the day. No one knew this better than Mr Hedley, the mining engineer at Wylam Colliery, and the subject was constantly present in his mind. He must have known what others had done. There was Blenkinsop of Leeds, with a rack-rail engine; and there was Chapman at Newcastle, with the endless chain and winding-barrel apparatus. These were certainly not very promising inventions, but he may have questioned whether or not either of them was the right thing, and we may, from what afterwards took place, assume that he doubted whether they were. What was the aspect of affairs? Blenkinsop's engine did not suit him; the system of the rack was excessively costly to lay down, and expensive to keep up. Chapman's engine worked with a chain which frequently broke, and although the engine had been working but for a short time it had sunk nearly £3,000 as effectually as though the money had been thrown into a well. Very well, such were facts. How did Mr Hedley act? He knew that all this bad luck was caused by errors of principle. It was not the boiler power, nor was it the

engine, but the evil lay in getting along so extremely badly; and it was this that brought up the working cost of the engine almost on a par with the cost of working the line by horses' power. Under such conditions, who would run the risk of being blown up into the air by using locomotives, when there was no economical advantage to be gained? The Wylam colliery-viewer turned the subject over in his mind, looking first at the rack-engine and then at the chain-engine, until it occurred to him that it might be possible to dispense with both systems. At least he thought so, and he would try it. Try it he did, at Wylam; the date is given as October 1812, when his experimental carriage was placed upon the railway. The object of this experiment was to prove, and, as it turned out, to settle for ever, that Blenkinsop's rack and Chapman's chain could be thrown aside. It was exactly the kind of test one would expect to see made at that time, nothing could be more in keeping with the question of the hour. Hedley was the man; Wylam the place; October 1812 the time. Accordingly a carriage (Fig. 7) was made at Wylam, under the superintendence of Mr Hedley, for the purpose of deciding the fact "that the friction of the wheels of an engine-carriage upon the rails was sufficient to enable it to draw a train of loaded waggons." This experiment was conducted with great care, tested thoroughly, and the result was to prove that the friction of the wheels of the experimental carriage *alone* upon the rails, when it approached in weight to an engine-carriage, was sufficient to enable it to overcome the resistance of an attached train of carriages. The experiments extended over the whole line, commencing at Wylam and ter-

minating at the Tyne, a distance of five miles. Fig. 7 is a representation of this test-carriage, or engine-frame,—the latter is the more fitting term to use, because a boiler and engine were afterwards applied to it. The frame was supported by four wheels, and acted upon by means of spur-gearing. The body of the frame was loaded with "pigs," or parcels of iron.

By the application of windlass-handles on each side of the frame, a result was obtained of the utmost importance in locomotive science. As above mentioned, the frame was loaded with iron equivalent to having an engine and boiler placed upon it, and the usual motive-power, namely steam, was represented by the muscular

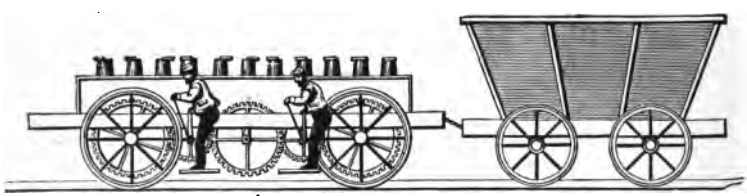

Fig. 7.—Hedley's Test-carriage.

force of four men at the handles; but this number was occasionally increased when an additional load of waggons was hooked on. Everything was properly weighted; the number of waggons hooked "on" and "off," and the amount of slipping properly recorded. Altogether the result was most satisfactory, and was a most interesting achievement, as it established the true principle of locomotion—gravity, the only motive-power in the world.

As might be expected, Mr Blackett felt that he was on sure ground, and he thought that an engine and boiler should be placed on the experimental frame. What

could be better? The test was perfect, and had not Mr Robert Hawthorn seen it and approved of the principle? It was determined that Mr Blackett's idea should be carried out, and an engine and boiler were put in hand, in the building of which, in those days of primitive engineering, great difficulties were experienced. Many times in the course of construction they were just about as far on Wednesday as they were on Monday; but the "iron horse" grew slowly.

The boiler was of cast-iron, cylindrical, having a longitudinal tube through the centre, leading to the chimney, which was situated at one end, whilst the furnace was at the other end. The engine had one cylinder 6 inches in diameter, and a small fly-wheel to help it over the centres. The boiler was loaded to the pressure of 50 lbs. to the square inch, a pressure which at that time was "talked about." Talking about steam, amongst the collieries at some distance from Wylam, if a brakesman "cracked" on about the pressure in the boiler which worked his whimsey, he was met with a challenge to go and see "Trevethick's patents" that carried 50 lbs. steam.

But this engine did not go well for want of steam, and, to try and make it a better engine, a second cylinder was added—with no better result, of course. The weak part of this engine was the boiler; the radical defect was an insufficient supply of steam. Unfortunate as the want of steam was at the time, the question was decided, nevertheless, that the adhesion of the wheels of the engine upon the rails was sufficient to produce a progressive motion in the engine when loaded with a train of carriages, without the assistance of the rack-rail or the chain-barrel. Great credit is

due to William Hedley for *this* discovery, this great discovery. He was confident that the principle was right, and he exhibited not the slightest degree of indecision, but was resolved to try again. Make another locomotive? Yes; that he would, and sure enough he did. His next engine was a success, and excited great interest throughout the mining districts. The engine is now in the South Kensington Museum. People from all parts came to see the iron and steam horses, which were called by the workmen "dillies." The boiler of Hedley's second engine was of wrought-iron; and in designing it he felt the necessity of increasing the heating surface to obtain a sufficient supply of steam. At the same time, he had to limit the weight—a point of importance where the railway was "rickety." At the time to which we refer, the rails at Wylam Colliery weighed 36 lbs. to the yard.

The stability of the line has always been a perplexing question with locomotive engineers in consideration of which they are not unfrequently cramped in maturing the mechanical arrangements of an engine. The road is, on some lines, fully a quarter of a century behind the requirements of the time, and the rails look like bits of wire under a 60-ton or 70-ton engine. If the weight and speed of the trains demand the employment of an engine of that kind, the road should first be fetched up to a high state of efficiency. The engine is, in some instances, ahead of the road; whereas the road should be in advance of the necessities of the engine, leaving a margin for the constantly increasing weight of the rolling-stock.

Mr Hedley thought of two methods of increasing the

supply of steam, which prove that the business was in good hands.

According to the first method, after the tube containing the fire had passed to the end of the boiler, he proposed to return the tube back through the boiler before terminating in the chimney, thus making a return or double tube.

By the second method, after the fire-tube had traversed the boiler, the heated products of the furnace could be divided, making two flues for the return in place of one.

He took time to consider the matter, and at length determined on applying one oval return-flue through the boiler—a plan that would present much more heating surface than his first boiler, and one that would absorb much of the heat from the products of combustion that had hitherto been lost in the chimney. In the single-flue boiler the chimney used to be red-hot, and when the engine was puffing and snorting away on a dark night, this " head-light " would shine with the brilliancy of a meteor.

It is stated that the " Black Billy's head-light " frightened a man at Newburn out of his senses, so much that he " made " through a hedge, and calling on the first person he met to listen, narrated how he had seen a terrible " devil " on the road.

After some trouble in finding qualified workmen, and taking down this and putting up that, a contingency which usually happens with new work, the boiler was finished. The engine was at first placed on four wheels, and it gave general satisfaction.

The fuel used for generating steam was of a rough description; whereas, in the first engine, nothing would

do for the driver but the very best coal. The great economy was manifest, and it no doubt proved a sponge to wipe out many a black score at Wylam Colliery.

Shortly after the new engine commenced working, it was placed upon eight wheels, as the railway was too weak to support the weight upon four wheels (Fig. 8).

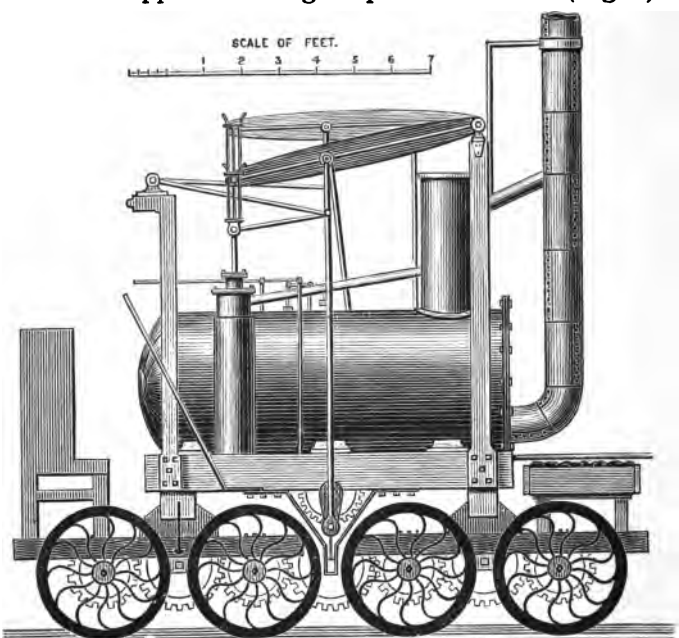

Fig. 8.—Hedley's Engine.

The gauge of the railway was 5 feet. This engine was, as we may be sure, a great novelty, and it made a noise in the world; sufficient, at all events, to be heard at a colliery hard by, and so loud as to induce the owners to make an engine like it,—of which more shortly.

The second engine at Wylam, by its practical success, set aside rack-rails, chain-barrels, and movable legs. It brought locomotive science nearer to the true principle than any other engine before it had done; but there was one thing in this engine that stopped just a little bit short of the exact point, and after we have dealt with it we shall then investigate the doings at another colliery, quite as extraordinary as the doings at the Wylam Colliery. In the building of the second engine at Wylam, provision was made for the purpose of quelling the noise of the exhaust steam, which, in the first engine, was discharged into the atmosphere. The plan made use of was simple and good, namely, to blow the exhaust steam from the cylinder into a condensing-box on the front part of the boiler, whence the reduced steam was allowed to escape through a pipe into the chimney.

The condensing-box had the effect of putting an end to the noise of the exhaust steam when it escaped from the cylinder direct into the atmosphere, but could create very little draught on the fire, and the arrangements were totally opposed to produce such an effect, since the exhaust steam from this pipe blew across the line of the draught in the chimney. That it had a sensible effect need not be doubted; because Mr Hedley, some time after the condensing-box and pipes to the chimney were in operation, is stated to have had the end of the pipe altered with its end vertical in the chimney. This was an improvement, yet still the exhaust steam was passed through the box to reduce its pressure and temperature. That the pressure was reduced, there is the evidence of the "condenser" on the boiler to wit.

We will now take our leave of the Lorraine engineer, Cugnot, Murdoch, and Trevethick; the same of Blenkinsop, Chapman, and Hedley, and will proceed to consider the works of Stephenson, the seventh champion on the roll.

We have some dim notions about this mystic figure seven, but have not space to record them. We may with the poet say—

> "I have wandered in the mountains, mist bewildered,
> And now a breeze comes, and the veil is lifted,
> And priceless flowers o'er which I trod unheeding,
> Gleam ready for my grasp."

We pass from Wylam to classic Killingworth, to see the celebrated man that was to become prosperous and famous by means of the locomotive.

CHAPTER VI.

GEORGE STEPHENSON.

NOW and again a man appears on this world's stage charged with a noble mission. Like Elijah the Tishbite, inspired, and, to all intents and purposes, told off by Divine Providence to carry out some great work. Such is George Stephenson—George Stephenson the Killingworth Engineer, George Stephenson the Immortal!

Great things did this man do for the century adorned by his name: his genius has inscribed his name indelibly upon its history.

As we have faithfully traced the progress of the engine, it was not necessary, up to this point, to make mention of the name of Stephenson, since he had no connection with the locomotive until some time after it was put to work on the Wylam Railway under Mr Hedley, who made the way for Stephenson, and gave him a good start at Killingworth.

In the year 1815, Stephenson thought of building an engine. His brain was equal to the undertaking, for his head was like a storehouse or a carpenter's shop, from which he could readily take what he required, and apply it to the best purpose, or shape it as he liked.

For several years he had watched the working of the Wylam engine, and he had an idea that he should like to make one for the "Grand Allies," the owners of the Killingworth Collieries, where he was employed. Could he do this? Had he the necessary qualifications? Let us see. At Wylam he first saw the light on the 9th of June 1781, a hundred years ago (Fig. 9). The son of Robert Stephenson, who described him as being like a "peer o' deals nailed thegither, an' a bit o' flesh i' th'

Fig. 9.—Birthplace of George Stephenson, at Wylam.

inside; an' war as queer as Dick's hatband—went thrice aboot an' wudn't tie."* The wages of George Stephenson's father were never more than twelve shillings a week, being a fireman at a colliery, and therefore the lad had to turn out pretty early in life. He began, like a good many country lads, by tending cows in the lanes, filling up the time stoning water-rats, climbing trees after nests and skinning the bark

* Smiles, "Lives of George and Robert Stephenson."

off his shins; but his favourite play, we are told, was making "Liliputian mills in the little water-streams that ran into the Dewley bog with steam-pipes made of hemlock." From this he went to the plough, leading the "leader." He was subject to all the changes of employment incidental to farmhouse life. But he liked his father's business best, and he watched every opportunity to find employment at the engine-house.

The smell of oil in his dad's clothes was to him the finest aromatic perfume, and to wipe his hands with "waste" from morn to dewy eve at a colliery whimsey his sole ambition. As all things come to those who wait, so the time came to which for years he had looked forward, and after having driven a gin-horse for a time, he was engaged at Dewley to fire the boiler when he was fourteen years of age, and his pay was six shillings a week. Jim, his brother, was also a fireman.

Shortly after this, George went over to the M.-M. W., or Mid-Mill Winnin Colliery, and fired there for two years to a "wheezing, sighing, creaking, and bumping engine"; but, at the same time, events were casting their shadows before. Instead of spending his spare time in the ale-house, he was preparing himself to take higher wages. His social habits were those of a man whose sole ambition was to comprehend all about the routine of an engine-house as well as a stoking-hole. He wanted to rise, and rise he must; and therefore it is not surprising to find that this man's leisure hours, spent in acquiring practical knowledge, should have turned out so remunerative. Whatever a man soweth, that shall he also reap. Stephenson at this time was working twelve hours a day firing; he had been doing so for some years, but in a short time he became plug-

man at the Water-row Colliery, and his father was fireman there at the same time. George lost no time, but buckled to, improving every minute of his spare time to learn two things: his letters, and how to brake an engine. Occasionally he received a lesson in the art of braking, and by practice he learned the art. In 1801, he obtained the appointment of brakesman at the Dolly pit, with a day and night shift, and "a standing example of manly character" he was. He hired a cottage dwelling, and at the same time he married Fanny Henderson at Newburn church, on the 28th of November 1802. With his wife and his occupation as brakesman at Willington, and a bit of garden, he was rich. But his marriage cannot be passed over without our hearing the account of it given by Mr Smiles. After the pair had been married at church, "the bridal party set out for their new home at Willington Quay, whither they went in a manner quite common before travelling by railway came into use. Two farm-horses, borrowed from a neighbouring farmer, were each provided with a saddle and pillion, and George having mounted one, his newly wedded wife seated herself behind him, holding on by his waist. The bridesman and bridesmaid in like manner mounted the other horse; and in this wise the wedding party rode across the county, passing through the old streets of Newcastle, and then by Wallsend to Willington Quay." Such was the great locomotive engineer's marriage, just about the same time that Murdoch frightened the parson with his locomotive at Redruth in Cornwall.

At this time, he was pulling hard against the stream; —occasionally mending clocks for the neighbours and

diligently studying the principles of mechanics. Anyhow, so long as the elements that enter into the construction of the various parts of machinery were impressed on his mind, he was satisfied. We feel that these minute details are imperatively demanded; for it must be remembered that, with all homely and rude surroundings, we are dealing with a candidate for fame, and with a man whose name is illustrious, so that every turn in his daily calling is deservedly interesting. It is all history, every bit of it. We may try to deceive ourselves that it is ordinary narrative, but in vain. Look on the marriage scene thus described, and then on the man of after-years, in the zenith of fame, and it is impossible to feel indifferent. The ground on which we stand is full of love. The incidents of his early life are more astounding than the fancies of even Eastern poets. Perhaps in the whole history of biography, in the history of one man's life, it never did occur for the last to be first and the first last. But he was the last to take up with the locomotive, and the first to triumph in its achievement. He was the last in the field, but the first to win the prize. He was the last to try, but the first to succeed. He was the last we should expect to rise to fame as a locomotist, but the first to obtain it.

We will return to Willington Quay, where, under many adverse conditions, he studied mechanics; not from books, for he possessed none, but by taking the clock to pieces and by disconnecting various parts of his engine and putting the pieces in their places again. By such means countless items of information were gleaned; a knowledge of the mechanical powers, or the elements of machinery, one by one, was acquired by

his inquiring mind. He was doing real work; encouraged to persevere solely out of love for the subject, and prompted by the reflections of how well he had so far succeeded, he pressed onward. The devoted husband: the young engineer. The unfolding of his mind is little short of the marvellous, seeing how much dead weight there was on the surface. In this fact we see matter for congratulation; his origin and its surroundings are so much as ours are, that they send us again and again back to resume our struggles in pursuit of our favourite enterprises, and with a will. We would counsel all who wish to succeed, or who require now and then the example supplied by some stimulating piece of biography, to lift up and to sustain their weary hands, to read the life of George Stephenson.

There is no sham in the history; its stern life seeking no higher approval than that to be found in the consciousness of "moving on," rejoicing in hope; genius in contest with rugged nature, hewing and shaping the "stone" for the wall which sooner or later it will have to adorn.

Here is a man, though only a poor brakesman, practical, in all simplicity goes hand-in-hand with his "adopted," rising to fame. Willington Quay became too small for his ambitious spirit, and having been offered a situation at West Moor Colliery, similar to that which he held at Willington for several years, he accepted it. But soon after his wife died, and while grief was still on him he left West Moor and went to Scotland, to take charge of a stationary engine at a large spinning-works, near Montrose. He did not remain long there, but returned to Wylam, footsore and wearied. He started again at the West Moor pit

as a brakesman. He had been farther away from home than he had ever been before ; he had learned what it was to be on the road, and to feel the weight and oppression of cruel circumstances. He was afflicted and made acquainted with grief, and was not, by God's providence, allowed to escape the "fire." He had scarcely embraced his little son Robert, and visited the grave of his lost wife and daughter, than he was drawn for the militia, and in the anguish of his heart he wept bitterly on the road between West Moor and Killingworth ; "for it tried my heart," said he, "to leave my home and my boy, and the scenes of youth and the friends of boyhood. I wept bitterly, for I knew not where my lot in life would be cast." He was by providence—and luckily for England that Robert was born—prevented from drinking the "cup," which to him appeared to be full of bitterness, by having a friend in the time of need. There was no alternative at that time but to "go a-soldiering" or pay. He hadn't so much ; his savings would not "run to it," and what was to be done? Had he not been a dutiful son, a dutiful husband? and did his heart not yearn for his boy, and yet this cruel fate falls like a thunderbolt to quench his spirit, and finally defeat his aspirations. "I wept bitterly," said he, and we doubt not the big tears scorched his cheeks.

But man's extremity is God's opportunity ; and as it is only when we are fit to live that we are most fit to die, so it is only when we feel most weak that we become most strong. Our inward strength is then almost startling. He had his gracious moment. Stephenson went—dare we say by inspiration?—to a friend who lent him some money, and thus assisted

him through one of the most eventful passages in his life. In the year 1808 this occurred, and he was twenty-seven years of age.

Soon after he was delivered of this trouble, prosperity smiled, and we find him at West Moor, claiming to have made considerable saving by reducing the friction about the pulley-wheels of the winding gear. His individual character was just developing, and who can tell what part the painful past had in effecting this? Traces of such ordeals sometimes go half way through life, and not unfrequently turn the course of many a life; sometimes the fatal self-consciousness of having been in the "fiery furnace" deters the sufferers from looking abroad. They become forlorn and dejected, and loath to approach the fire again which burned them. For ever after they confine themselves to the humbler walks of life, and leave to others the next act. It was not so with Stephenson; he put on *more* armour, and all might have seen it. He was a brakesman still, but he was now a man who could overpower every impediment in the way of his mastering the details of the engine. The dross had been burned out of him in the past, and the fierceness of the flame enabled him to say triumphantly, "For this relief much thanks." George Stephenson acquired influence with his fellow-workers; they knew his strength of purpose, the ardour of his zeal, the enthusiasm and courage with which he fought the wrong, and by which he maintained the right. Every line in the chapter of his life shows that they were not deceived. He did not altogether rely on his own self, he knew that self was weak.

> "Yet thoroughly to believe in one's own self,
> So one's own self were thorough, were to do
> Great things."

But he committed no such foolishness: "cobbling shoes, figuring, and braking went on together," but he could see no inconsistency in one moment pointing out the faults in an engine, and in the next the mercies of Divine Providence. He was not an effeminate ascetic, neither did his views of religion overpower his good sense; but he was not so small a man as to do on Sunday what could be and might be done on Monday. Such a test of his principle once occurred. The "Grand Allies," neighbours, had one of their pits drowned out, and they could not get the pumps to "throw" properly. George had casually expressed his opinion, as men with opinions to express will do, without being asked, that the engine was defective, and that he could alter her. This was reported to headquarters. What was Stephenson's opinion? he was only a brakesman at West Moor. Such sneering touches are very often the marks of little minds. Rare souls do not easily give vent to such utterances, levity of the cheapest sort, to try unblushingly to depreciate unduly and untimely another experience. Very few dare to disregard the justice of giving even the worst enemy a chance to prove himself right.

The water continued to rise in the pit until it began to be noised about that the engine was a huge failure; and they might have added another great failure—the failure of the brakesman to find out the cause of the failure. Altogether the affair looked much to the disadvantage of the viewer. Sunday morning came, and the scene at the pit was not creditable to any one. If there was any superior skill in the district it was surely wanted at the High Pit, to unwater the mine. What could be done? Hadn't Stephenson said he could alter

the engine? Why not break through false pride, and call him in? The feelings of chagrin, of disappointment and pain, have no weight in the presence of real danger. When the ship is on her beam-ends through the cargo shifting, what does it matter who removes the danger? By Sunday evening the water gained so much that it was contemplated fetching Stephenson, and so the head viewer left the pit with that intention, and, falling in with him dressed in his Sunday suit, on the way to the preaching in the Methodist Chapel, he wanted George to go and have just a look at her. But no, he would not. It was Sunday. "But to-morrow morning I'll set to work, as I think I could put her right."

The next morning the engine-doctor arrived, and in a short time the water was got away. No one was better pleased than Stephenson. The real value of this cure—this effectual cure—might lead to something some day. He had exhibited throughout his whole career a desire to excel, and had employed all his spare time in the study of the principles of mechanics, and he was slowly but surely going the right way for promotion; which came sooner than he expected, owing to his having freed the High Pit of water. The viewer gave him ten pounds, and made him engine-man at that very pit. A brief consideration of the task which he had to do, in bringing about his rapid promotion, supplies the best criterion of his capacity. This phrase must be taken to denote the resources that at that time lay dormant within him. Whatever ingenuity he may have displayed in clearing drowned-out pits, it requires no persuasion nor pleading to prove that his power was founded upon his thorough study of the science of

mechanics. Such a one is never lost for an explanation; he no sooner sees his patient than he prescribes the remedy. The ability which Stephenson brought to the service of the Killingworth party was backed by a thorough command of circumstances, which helped him all through life. He was masterly in device, he was fertile in expedient—qualities most needed at Killingworth; and it was in these that the strength of Stephenson lay. He need not have had much difficulty in proving to his party that they had to "send" for him. He made it more effective. He knew that real worth was seldom acknowledged, and that only by a daring license it was called "clever." But he knew himself, and bided his own time.

Suppose that, after clearing out the pit, he had followed a train of thought something like the following, that took place near London:—Driver A was discharged for allowing his engine to run away, with the fireman asleep on it, with a passenger train. After an interval, he was again employed in a lower grade as fireman, in which capacity he served for a time, and was made a driver at the lowest pay. Circumstances compelled the foreman to give him main-line work. He ran a trip, and thinking the "time" had arrived, he waited on his foreman next day. "Sir," said he, "I ran main-line yesterday." "I know you did," said the foreman; "what by that?" "Why, I want to know if I am going to have main-line money, sir." "Hold on," said the foreman; "before you get the whole of the sentence out, let me inform you that the train you work is knocked off to-morrow, so your professional services are no longer required; and, before you leave me, allow me to tell

you that a man's capacity is like the strength of a chain, the weakest part is the measure of its maximum strength, and you should never forget that."

In 1812, four short years after Stephenson borrowed money to get clear of the liability to serve in the militia, over which the big tears rolled down his face, because his way was hidden from him, and because he knew not how his life would be cast in the future,—in 1812 he was made engine-wright to the collieries leased by the "Grand Allies." We cannot refrain from noticing the chain of events, and we have endeavoured to trace them up to the attainment of the object which crowned his destiny. Hedley, at this time at Wylam, was getting Mr Blackett's second engine built by Foster, the engine-wright there. The whole period of his acquaintance with the engines stretches over an interesting era. He had been for years the architect of his own intellectual edifice; at one time his thoughts were wandering here and everywhere, now he could concentrate them on any one particular thing that claimed his attention. Yet more, he had learned the method of storing information, and one special feature in his daily life was to contemplate every new fact in the same light as an astronomer regards a newly discovered planet. Living as he did amongst fly-wheels, brakes, and boilers, with a special passion for engineering, the engine-works grew with him rather as an instinct than a science, and continued through life the delight of his latest hours.

The scenery he liked was "set up" by Smeaton, Watt, and Hawthorn.

He liked nothing better than the steam-engine, and his enthusiastic love for its development grew with his

growth, and he was credulous enough to think that he could "do" with a locomotive at Killingworth. By all means let him try; but, at this stage, impartiality compels us to insist that the doings of the Wylam people should receive their due meed of appreciation.

It was to them that Stephenson was at first indebted for everything pertaining to the locomotive, and as locomotives had been working, and had passed him on the road, close to his home, he had every opportunity of making himself thoroughly acquainted with what they could do and what they could not do, before heating a rivet for his own engine. The cause of the locomotive had lain close to Hedley's heart, and exercised Hedley's brain long before Stephenson joined the cause. Hedley had wandered in the mist, but now the veil was lifted, and the "flower" was above the bed's head gleaming ready for the grasp. The ardent soul of the Killingworth engine-wright yearned after the locomotive, and his mental struggles are portrayed in the visits that he occasionally paid to Wylam to talk with Jonathan Foster on the spot.

These frequent visits were of a friendly nature, but we all know it ended in making him the foremost of English engineers.

The strains that struck the heart in after-years, when the hopes and dreams were more than realised, were ten thousand times less likely to scare him into dreaming than was Foster's story of belly-stays leaking in the Black Billy.

All the salient points of the engine were carried away to Killingworth, and after mastering all the arrangements, the task of making an engine forced itself upon his attention day and night.

But *he* had never constructed an engine; hardly was he in a position to lead the "Grand Allies" so far as to induce them to yield. What argument could he advance to move them to speculate in locomotives? Had he any clenching fact to lay before them, showing that locomotives "paid"? He knew nothing except what Foster had divulged; but true, Foster was an intimate friend, and it was well for him—and England—that he was. It is not either to be thought that Foster, an employé of the Wylam people, would be found encouraging Stephenson to compete with his employers. But it was extremely annoying to Blackett and Hedley to hear of George Stephenson's frequent visits to the Wylam railway. For what purpose were these visits made? There could be but one answer. To see what the engine was like; to find out what the engine did; to hear what was considered their weak points. His mind could readily lay hold of and understand any good feature, and it was equally ready to detect a bad feature. He had so abstracted his mind as to fix it solely on the engine, and he could not get "off" from it; and therefore he went before the "Grand Allies" and pleaded the cause of the locomotives.

The system of hauling coal by engines instead of horses had been denounced as an absurd innovation, and many stories circulated about Killingworth and elsewhere particularly damaging to their reputation; whilst all the colliery people were, to a man, hostile to them, and they embraced every opportunity of running down the engines. Why, one had blown up and killed many folks; and the proprietor of a "way-leave" had threatened to shoot the driver. People had a hard task to make both ends meet as it was. How would

they manage if the engine were established? The topic was an unpleasant subject everywhere, and the "Grand Allies" were not prepared to run after ridiculous notions. The collieries were now quiet and prosperous, but this madcap engine-wright might raise a storm that not even the "Grand Allies" could quench, without "sinking" a lot of money. The place might fall into a state of siege—one of the most unpleasant conditions imaginable in which a firm of irreproachable character can find themselves called upon to abide. They could now walk quietly about their "fields," without the startling sensation of being fired at by some drunken fool, labouring under some imaginary grievance, brought about by the locomotive.

Stephenson had before given utterance to his sanguine speculations as to the *Travelling Engines*, but the firm had a certain amount of timidity which had to be respected by one in his position. There can be no doubt that the caution exercised had been fully justified by past events at Wylam.

But nothing would dissuade the Northumbrian engine-wright from thinking that there was a good "thing" at Wylam, and that he would like to see a good thing at Killingworth. And Killingworth should. And Killingworth did. He who can take up and adequately describe all the rich endowments that have followed to this country upon that, deserves to be called a master. Man required a locomotive. God found the man to make one. Necessity was the prime mover, and to provide for it all things must conform. Want does all things; it builds the world, builds the railways, bridges, and rivers; builds harbours, opens public ways, builds temples. We cannot find another

incident in the history of all time so deeply fraught with interest as that of George Stephenson receiving orders to build an engine from the "Grand Allies" for Killingworth Colliery. Great drawbacks there were, but Stephenson was a countryman that could face them. He had confronted difficulties before, and knew nothing about defeat. He had courage to persevere, and that was in itself sufficient to rout a host of foes. We read of battle-fields famous in history, immortal in fiction. But the coal-fields of Killingworth, are they not famous? On this ground we are spellbound. Hark! hark how the anvil sounds, stroke follows stroke, flash, flash. Sons of Vulcan. Forgers, forging an "iron horse." Strike, men with bare arms, craftsmen, strike! Strain, men, with bosoms bare! Finest forgers, strain every nerve! Strain! strain! Down, men with dishevelled hair. Finest hammermen, down, down on the hissing mass, down! See the molten lava pouring from his sides. Flashing sparks hurl with iron force their red-hot sides against the smithy wall. Albion's smithy. The roar increases. The village resounds. The thunder of the anvil shakes the ground. Flying hammer-men, fly! The monster shudders, the blood toils in his veins. Seize, finest craftsmen, seize! seize this fiery Northumbrian "horse"—monarch of speed.

CHAPTER VII.

GEORGE STEPHENSON'S FIRST LOCOMOTIVE.

HAVING been commissioned to make a locomotive, he applied himself to the task. Little did any one think at that time what a marvellous stride he was going to make in the construction of the locomotive engine. He commenced at once. The faults and the merits of the Wylam engines were alike laid open, and with a select conclave of his associates, all was done above board. It was a simple talk that they had, and yet the consequences and results baffle and beggar description. Stamp it with language? It cannot be done. We stand amazed, and looking in any direction we will, the number of benefits flowing from this one man joining himself to the locomotive cause has no parallel in history. We must not forget the tools he had to start with; they were very limited indeed, and skilled workmen were like parish churches, only one here and there. And then engine-building was a newly created art accompanied by many difficulties, much putting up and pulling down before the machinery gave anything like satisfaction.

But he had a better chance of succeeding than any man before him, for it was his privilege to begin where his predecessors had left off.

And it is not by any means a difficulty to show and establish the fact that he did profit, and very much so, by inspecting the works and discoveries of others, just as others had done before him, and it is right that he should have been expected to produce a good engine. He was intensely fascinated and interested in the progress of the engine, and on one occasion he expressed himself in a way not at all inclined to lead his hearers to think that the engine was perfect. It came with good-humour, no doubt, but it was a bold opinion to hold that he could make a engine to go upon legs, and then be better than any he had seen working; and this expression was the subject of much curious speculation in the colliery districts.

The locomotive engine had already been invented, six individuals had before him experimented upon it, the last of whom was Hedley, and he had made an efficient and economically working locomotive engine. What were the revelations, then, that placed Stephenson in the front rank of locomotive engineers? It was not the employment of steam; Papin had employed that for driving machinery a century ago. It was not the invention of the locomotive, for we have proved that it was introduced before his time.

We have, therefore, before us the task of tracing Stephenson's part, and of showing how he accomplished it.

It was an extraordinary undertaking, but Stephenson had studied the improvements of others, and formed plans for introducing improvements of his own. He started well. And the chief operating cause in his success was having at his back the "Grand Allies,"—money! money!—and the firm

ready to acknowledge that special advantages were attached to the trial from a speculative point of view. The services thus rendered to the country by this spirited undertaking of the "Grand Allies" should be immortalised in English history.

It is an interesting reflection that they gave their consent to adopt Stephenson's plans with a feeling of simple admiration for his practical talents. It was through them that the application of steam-power to work the colliery railways received at this time a fresh impulse. Had they neglected Stephenson's suggestions, the days of the "rapid car" would not have reached us, and sixty miles an hour would have been an unknown feat. Indeed, what the consequence may have been is hard to tell, but we may be sure that we should be hearing a good deal about "Lunnon" yet, and less about London.

At the opening of the Newcastle and Darlington Railway in 1844, Stephenson said: "The first locomotive that I made was at Killingworth Colliery, and with Lord Ravensworth's money. Yes, Lord Ravensworth and partners were the first to intrust me thirty-two years since with money to make a locomotive engine."

He began the construction of the engine at Killingworth in September 1813. The boiler was made of wrought-iron, cylindrical, with hemispherical ends; and the furnace, or fire-tube, was merely a tube passing longitudinally through the boiler into the chimney. The tube was 20 inches in diameter, and was turned up at the front end to form the lower portion of the chimney. The chimney was also 20 inches in diameter and parallel throughout.

The part of the tube in which the fire was placed was occupied by the masonry and fuel to an extent approaching two-thirds of its sectional area. An angle-iron ring surrounded the furnace at the back, to which the door was attached. It was to all intents and purposes a boiler of the most modest description, and the heating-surface necessarily very limited.

The works of the engine were also of a very unpretending character, but the design was novel, and that was a "long" stroke in Stephenson's favour. He could not very well erect an engine exactly like other folk's. He was certainly a practical engineer, and he was supposed to have taken the engine in hand to introduce something "new." The boiler was saddled with two eight-inch cylinders let into the top, and fixed vertically one on each end of the boiler. The application of two cylinders had already found favour with Blenkinsop and Hedley; in fact, Stephenson's first engine combined a little of both. The principle of the boiler was Blenkinsop's, and the motion Hedley's. Blenkinsop was the first to use two cylinders, and Hedley was the first to use spur-gear and smooth wheels. But smooth wheels without spur-gear was not as yet introduced; but engineers were getting nearer and nearer to such a contrivance, and it was George Stephenson that first accomplished it, as we shall show presently. In his first engine no doubt he used spur-gear, as Blenkinsop and Hedley had done before him; but neither Hedley nor Stephenson used the rack.

It is a most singular thing that none of them thought of making an engine with a horizontal cylinder like Trevethick's first engine. They could remember his spur-gear for communicating the motive-power to

the wheels supporting the machine, but "none the bit" could any one of them at that time think of copying the principle of the engine in its entirety.

The pressure of the steam upon the piston was conveyed by means of the connecting-rod and small cranks to spur-wheels, in Stephenson's engine, all placed inside the framing. These pistons produced a great noise, and as the engine had no springs, there were considerable jerks at some parts of the stroke. Many a man has been ruptured by the engine riding roughly. When this engine, or in fact any other engine of the period, was working, one could not hear one's own voice for the rattle and noise produced by the motion.

An exact idea of what the noise was like may be obtained by watching an approaching traction-engine. The engines at Wylam and Killingworth with spur-gear, made just as much noise as a traction-engine. When, in the course of a revolution, the leverage of one crank became greater than that of the other, the latter was propelled by the former through the intervening wheels; but when the former approached towards the extremity of the stroke, its leverage became less and less, and the leverage of the latter became greater as the angle between the connecting-rod and the crank increased, and at a certain point the latter preponderated. When a change in the action thus took place, the former was then the propelled, and the latter the propelling agency. If any free spaces existed between the teeth of the cog-wheels, the transition of this acting force from one side of the teeth to the other naturally caused frequent concussions between the teeth, and caused the engine to lurch. This disturbing

action became greater as the teeth became more worn and the space between them greater.

We have observed that all this spur-gearing, with its deficiencies mentioned above, and experienced in the Wylam engine, was introduced to obviate the assumed difficulty, that the friction of the wheels of an engine upon the rails was not sufficient to enable it to move satisfactorily.

We observe, too, that to a great extent Stephenson's first engine was a mere embodiment of all the good points that he could find in other engines, and formed nothing extraordinarily new at this time. But he was on the way towards something that had not previously been properly appreciated.

The engine was turned out of the Killingworth shop on July 25th, 1814, and put to work on the same day, with no flattering results. In fact, Stephenson was "chapfallen"; the engine did not work better than others he had seen; in fact, it had much to do to crawl along, notwithstanding that it was a "Stephenson." He had made great exertions, but the engine possessed none of the advantages that the enginewright had predicted; and the "Grand Allies" were not a little dissatisfied at the result of their twelve-months' work. The cost was as nearly as possible the same as the cost would have been had they employed horses. The engine would not ascend the slight incline, until after it had received alterations. The speed was four miles an hour, and the engine could only replace two horses. The engine was short of one thing, which is of great value on a railway, namely steam. Shortness of steam was its failing, owing to the amount of heating surface being comparatively small.

But this was only a portion of the evil; the extremely rude and inefficient mode of managing the fire and the heated products of combustion after they had passed from the furnace, was the greatest evil. Stephenson had no return-tube, as Hedley had in the Wylam engines; he had chosen the plan of boiler in use by Blenkinsop.

The fuel was imperfectly consumed, and the result was very meagre.

It was a great failure, and Stephenson as well as the "Grand Allies" knew it; and it was a critical juncture for all.

Why have meddled with the engine at all? Why not have consulted Hedley at first? He was at the neighbouring colliery with his engine; and to add to the vexation, Hedley's engines were going well; they were at all events more powerful, and they gave no such trouble as this "Blucher" did.

The failure of the engine was eating like a canker into the heart of the builder; and, to add to the unpleasantness, the machine was regarded as a usurper.

To wonder that the people jeered as they did, is much like wondering that the panther retains its spots, and the Ethiopian the blackness of his skin.

There were weak points somewhere. Could he cure them? thought Stephenson.

Build a new boiler? by no means. The "Grand Allies," like Trevethick, had had very nearly enough of it.

He could do what he liked; but make no more expenses.

What a contrast with the dreams that had soothed many a time the ambition of the engine-wright! His

engine "on stilts," the world ready for all sorts of mischief; it was trying indeed to any soul.

But Stephenson was ingenious and masterly in device; he was fertile, with a head like a carpenter's shop. These qualities were needed, and it was these that he had; it was in them that his strength lay.

He had joined himself to the cause of the locomotive, and he would throw the spell of his influence upon it.

The faults and the merits of the engine passed in review before his mind; he struck right and left into the question. What were the salient points, and what were the damning defects. All was laid open to view, it was the hour to deliver himself.

"It is my firm conviction"—had he not stated it to the "Grand Allies"?—"that I can make a much better engine than the Wylam one, one that would draw more steadily, and would work more cheaply and effectively;" the recollection of which weighed on and oppressed his mind.

And, further, had he not said, in respect to the Coxlodge engine, that "he could make a better engine than that to go upon legs?"

"This bubble world;
Whose colours in a moment break and fly."

The big-blown scheme had burst; and the locomotive which was to surpass all that had preceded it looked better on paper than on wheels.

So far he had not exhibited any appreciable engineering skill. He had built an engine, it is true, but it was a very unsuccessful engine. Now for the cause, and afterwards the remedy.

Stephenson—and he is not the only one who has made the same mistake—had made his chimney too

large. It was 20 inches in diameter against 12½ inches at Wylam. He had also allowed the exhaust-steam to escape into the open atmosphere with a hissing blast, which had been done away with at Wylam by exhausting the steam into a chamber.

Neither Hedley nor Stephenson was aware of the real value of the blast in the chimney, from the exhaust-steam.

If Mr Hedley had such knowledge, why did he blow the exhaust-steam from the cylinder into an intermediate chamber? why not have blown it straight into the chimney? Why use a chamber?

If Stephenson had such knowledge, why blow the exhaust-steam direct into the open atmosphere? Why not use a chamber?

At this very time of which we are speaking, Trevethick took out a patent for introducing fanners into his chimneys. None of them knew of the action of the blast in the chimney.

The cause of the failure of Stephenson's first engine arose from two things—too large a chimney, and no blast in it.

CHAPTER VIII.

THE BLAST IN THE CHIMNEY AND THE COUPLING-RODS.

WE now touch the remedy that increased the power of his engine, and which eventually established his fame.

Complaints had been made to the "Grand Allies" of their engines making a noise to the terror of horses and cattle, and the engine had been called a nuisance. To avoid this Stephenson had done as Hedley had done—provided a chamber on the front end of the boiler.

In this dilemma, he had either to place a chamber on the boiler to receive the exhaust-steam discharged into it, or to carry the steam direct into the chimney. The result was that, in choosing the second course, he found the *full* value of exhausting into the chimney, of which Hedley had only realised a portion.

Stephenson knew that Hedley had, at least in part, realised the value of an exhaust into the chimney, for he did not take out any patent for the application; neither had Hedley done so; and the blast in the chimney remains to this day a great power, discovered by a series of accidents. It did not proceed from one man's brain.

Well, Stephenson was the first engineer to deliver the exhaust *directly* into the chimney: not by choice —or he would have patented it—but by necessity.

Hedley paved the way for Stephenson at first: it was he who introduced the locomotive near to Killingworth, when Stephenson could walk round it and could form an opinion of its capabilities if fully developed.

It was Hedley who introduced smooth wheels with spur-gear, and exhausted *indirectly* into the chimney.

One man labours, and another enters into his labours.

As might have been expected—now, but not then—the Killingworth engine was improved when the blast-pipe was led into the chimney. It, in fact, made it a successful engine. Combustion was stimulated by the blast; and, consequently, the capability of the boiler to generate steam was greatly increased, and the effective power of the engine augmented in precisely the same proportion without adding to its weight.

The blast in the chimney led Stephenson on to fortune. Hedley's blast was intense; Stephenson's was more intense; and, like all things else on the wheel-of-fortune, it needs but little, and but little time, to throw one engineer "off" and another "on."

It has been made a point to wade through the evidence respecting improvements, so as if possible to give honour to whom honour is due; but we come now to a question that presents itself, and before leaving this part of the subject, we must not forget the genius and industry of those men who, in season and out of season, materially advanced beyond all doubt the wealth and power of the kingdom.

Our greatest men are our engineers ; and Murdoch, Trevethick, Blenkinsop, Chapman, and Hedley were labourers in the cause of locomotion. Their names will in time be written on one of the grandest monuments that the people of this nation ever beheld.

With the great resources of Stephenson's mind, he

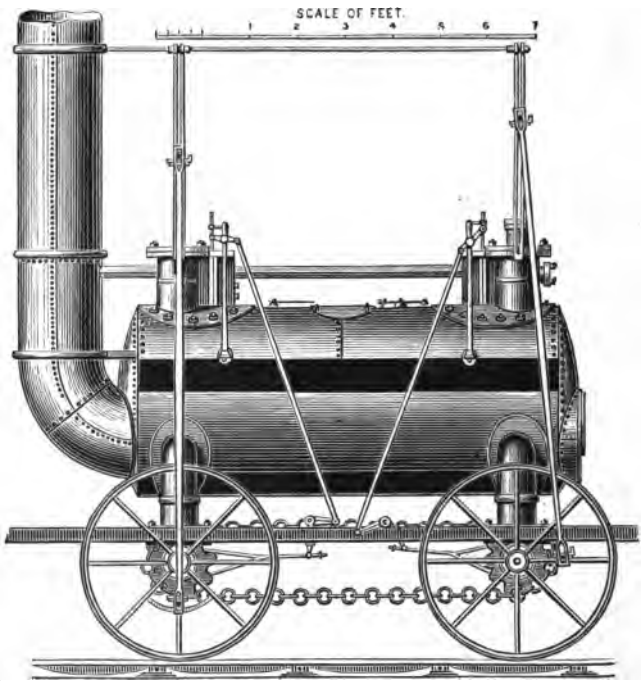

Fig. 10.—George Stephenson's Second Engine.

had achieved a victory ; and there was nothing to do now but to follow the bent of his own genius. He built another locomotive, and instead of using spur-wheels, he adopted a chain and other improvements. The

specification is dated February 28, 1815. It was proposed to connect each of the connecting-rod ends to a pin upon one of the spokes of the running-wheels of the engine. On this system, the reciprocating motion of the piston and connecting-rod was converted by the crank-pin in the wheel into a rotatory motion, and the continuity of this motion was secured by one pin being placed on a radius at right angles to the radius of the other.

Here we have a grand idea in itself. But instead of proposing to set the engine to work just as it is described, the specification goes on to state, "It is proposed to use a peculiar sort of endless chain passing over a toothed wheel on each axle." (Fig. 10.)

This was a decided step of improvement. The same principle of connecting the cranks at right angles is used now. It was the first engine worked by connecting-rods by means of crank-pins in the wheels.

The chain contrivance underneath the engine was set aside for a better and more enduring plan. The two axles that supported the engine were cranked, and a wrought-iron coupling-rod was fastened to them; by this means the crank-pins in the wheels were maintained at right angles.

The next improvement proposed was to do away with the jerking of the engine. Desirous to avoid the use of steel bearing-springs, Stephenson employed steam-cylinders with floating pistons for the support of the engine; two on each side of the engine, the end of the piston-rod acting as a thrust-pin on the brasses in the axle-box.

The inventor states that these pistons were capable of receiving shocks and disposing of their effects with

more certainty than could be obtained by employing the finest springs of steel to support the engine.

But these steam-cylinders below the boiler were found very defective; for, in the ascending stroke of the working piston of the engine, they were forced inwards by the connecting-rod pulling at the wheel in turning it round; and, in the descending stroke, the same pistons were forced as much outwards. This vertical movement in the steam-cylinder springs rendered it necessary to increase the length of the engine-cylinder as much as there was play in these steam-cylinder springs, to avoid knocking the end out of the working cylinders. This patent was taken out in 1816.

In the same year Stephenson, in conjunction with Losh, took out a patent for a railway wheel worth noticing. The boss was of cast-iron, with wrought-iron arms; the rim had lugs cast on its inside with mortise-holes dovetailed to take the dovetailed ends of the arms, which, after having been heated and expanded, were dropped into the holes in the rim. The arms contracting as they cooled, the rim was drawn inwards by them with great force, for the purpose of preventing its working loose.

In 1817, the railways, or rather tramways, about the north were becoming day by day more popular, not on account of the locomotive, but in point of economy as between the cost of carting and the cost of "tipping" coals from trams into the ships.

There were few people with money who had not speculated in railways. Amongst others in the north was Mr Pease, of Darlington, a Quaker; and Quakers are generally in the swim of safe investments.

Locomotive engines were not thought of at this time,

for although Stephenson had made them for the "Grand Allies," they were rather "shaky" things: there was but a shadowy margin between them and horses. They were not extolled as a wonderfully-paying machine, and their fame was nil.

CHAPTER IX.

GEORGE STEPHENSON A RAILWAY CONSTRUCTOR.

IN 1818, the Hetton Colliery Company proposed to make a railway, and to employ locomotives upon it; and they thought it would be to their advantage to obtain the services of George Stephenson.

They made him an offer and he accepted it: to lay out the road and work it with engines. He made every effort here to succeed with his engines; but when the Newcastle and Carlisle railway was projected, the directors, after witnessing what the engines could do, determined that no locomotive engine should be used on it.

They could see no advantage in locomotives, for fixed engines were in some places employed to help them up the banks by means of ropes coiled round drums; and, had there been any advantage, we may be sure that persons residing in the district would have noted it, and the fame of the engines would have been a topic of discussion.

Nevertheless, Stephenson made five locomotives at Hetton, with single-tube boilers. After Hedley's engine (which is in the South Kensington Museum), constructed with a return flue, these engines of Stephenson were looked upon as being defective; and

without doubt they were so in the opinion of many, but Stephenson did not think so. He held to them through good and evil report, which no doubt contributed to his final success, and to that of the engine. Very soon after he had made the Hetton railway as perfect as he knew how to make it with locomotive and fixed engines, he was informed that Mr Pease, a promoter of the Stockton and Darlington tramway, had great influence in the promotion of railways. He procured an interview with Mr Pease, and although this gentleman was in favour of tramways, he was not in favour of locomotives. This state of opinion shows that little or no progress had been made with the locomotive in 1821. Stephenson, however, said to Mr Pease, "Come over to my place, and see them working yourself." Mr Pease did so, and the impression was favourable. Even then, there was no final decision as to locomotives being employed, but as Stephenson had made the tramway for the Hetton Company, he could of course make one for the Darlington Company. Every one could see he was capable of making a tramway; and as to locomotives and their economy, of course the books of the "Grand Allies" could show whether it paid to use them.

The interview between Pease and Stephenson resulted in the latter being appointed engineer to the Stockton and Darlington tramway; and Pease made it to his advantage to move from Hetton to Darlington. After settling down, he was able to bring his engines prominently before the proprietors of the tramway, as they were employed in forming and ballasting it; and an Act of Parliament was obtained for power to use locomotives on the line for goods traffic.

Directly after this act was passed, Stephenson and

Pease opened a factory at Newcastle-on-Tyne, in 1824, for the manufacture of locomotive engines.

They at once made three locomotives for the line after the pattern of No. 1, with the motion on the top, coupled outside, instead of inside, by crank-axles.

It is interesting here to note that whilst Hedley abandoned cog driving-wheels and introduced the exhaust-steam indirectly into the chimney, Stephenson introduced the exhaust-steam directly into the chimney and abandoned cog-wheels *altogether;* at first using a chain, then an inside connecting-rod with a direct motion to the pin in the driving wheel; then he employed straight axles, and brought the coupling-rod outside, as in No. 1. Yet we have still an uncomely arrangement: and that is, the engine or motion on the top of the boiler.

This leads us to the year 1825, ten years after Stephenson joined the cause of the locomotive.

When the line was opened, a coach was run on it; the fare was a shilling, distance twelve miles; time occupied, two hours. A locomotive to draw it? No; a horse. The fare was then the parliamentary charge of one penny a mile; luggage, 14 lbs. per passenger; the light at night was a penny "dip." This is a strange narrative; there are people now living (1879) who witnessed it.

The importance of this railway came gradually into view. There were, at the beginning, several coaches on the line, drawn by horses; and it was some time later when an engine was allowed to draw a passenger-train.

Coal-waggons were drawn by locomotives. There were no signals, and a "devil" full of coals was the tail-light.

Railways were coming more and more into vogue.

In fact, for several years, a number of merchants and gentlemen in Liverpool had mooted a project for making a tram-road between that port and Manchester, as Brindley's boats were unable to deliver the goods without much inconvenience to them and others. Little by little, the locomotive era was coming. Grocers, drapers, and shoemakers argued that the then state of things could not go on. The merchants resolved to go and look at Stephenson's engines in the north, and witness their performance with coal trains, and report. But nothing was done.

And the canal continued to be worked, but with no better results.

Then a surveyor was employed to fix the direction of the line, and he was also sent to the north to see the locomotives working on the railway there.

He returned with a very favourable report on their performance, and declared that they were the proper thing for Liverpool.

The fame of the locomotive was spreading, and so was Stephenson's name. Can't we look here and see how much fickleness there is in fortune? Look back and see the "great" Trevethick, and the "indefatigable" Hedley; where are they?

CHAPTER X.

THE LIVERPOOL AND MANCHESTER RAILWAY, AND COMPETITION OF LOCOMOTIVES.

HARDLY a day passed but some one hailed Stephenson from afar to make inquiries "if they paid," and on one of these occasions he was invited to "visit" Liverpool, and look over the intended road between that port and Manchester, and this happened when he had nearly finished the Darlington railway. He accepted the invitation and saw the road, and returned with several of the promoters of the proposed line with him.

He ran them on one of his engines, which attained a speed of nine miles an hour; afterwards they returned to Liverpool, and their report was so impressive that the shares of the Canal Company dropped alarmingly.

Every possible objection was raised by the boat proprietors and "horsey" people, for they thought the price of horseflesh would be the price of dog's-meat if locomotive engines came nearer to Liverpool. Locomotives would never do—never. And it was not alone these people who opposed the engine; the civil engineers also opposed it. Many of them said that the Liverpool and Manchester line would be worked more cheaply and better by horses than by locomotive engines, whose boilers would be always bursting.

In fact, it was looked on by them as a ridiculous idea.

However, it was regarded by a select number of merchants as a paying project, and they resolved to introduce a bill in Parliament for permission to make a railway.

Counsel was employed for and against it. On March 25, 1825, Stephenson was examined, and, as might have been expected, many ugly questions were put to him. He was "plucked."

He was a thorough practical man; but dodge counsel round a point, and perhaps a nice point, he could not.

We have all heard of some of those questions put to him; they are very good. One was: "Suppose you were going ten miles an hour and a cow was on the line, what would happen, would it not be very awkward?" The reply was, "It would be awkward for the coo." Another question was: "Are not your red-hot chimney ends likely to frighten people?" Answer. "How are people to know if the chimney-end is not painted?"

Finally. He had made in his time sixteen locomotive engines; and he retired with this announcement from his tormentors. Result: the bill was rejected.

Stephenson goes to Darlington, and the railway promoters to Liverpool to concert what should next be done.

The promoters called in another surveyor, obtained another class of witnesses, and presented another bill to Parliament—with success.

Even then it could not be decided what was to work the line—horses or engines. They called in a professional engineer, paid his expenses to Darlington to see

the locomotives working there, and on his return he actually decided in favour of stationary engines.

There was, however, a division of opinion with the committee, and it ended in deciding to appoint George Stephenson engineer.

He accepted the appointment and made the line, employing one of his locomotives at the work. It was an appropriate thing to do, for as the engine moved about the line, the directors had an opportunity of forming a correct opinion of its merits.

Of all the railways that had hitherto been constructed none could compare with the Liverpool and Manchester.

It was the most perfect piece of road ever constructed, and great national interests were involved in it.

It must suffice here to state that George Stephenson made it, and a thorough good mechanical work it was. In its construction about 4,000,000 tons of stone, clay, and soil were moved; the total expenditure amounted to £820,000.

The length of the railway was thirty-one miles. It was laid with eighteen miles of stone-block sleepers, and thirteen miles of larch sleepers.

After mature consideration of what the directors had seen, of what had been reported and calculated by various engineers, it was decided in April 1829 to have a trial of locomotives, and then determine on the best description of power for the line.

Fixed engines at this time were much preferred, and the conditions and stipulations of the locomotive were such that many people thought that no man could comply with them. Such were the disadvantages

imposed by self-interest, and there was much self-seeking in respect to this line.

The stipulations for the engine were:—

1. Improved construction.
2. Best locomotive.
3. Boiler to stand a pressure of 150 lbs.
4. Boiler to work daily at 50 lbs.
5. To consume its own smoke.
6. To draw three times its own weight at ten miles an hour.
7. To be supported on springs.
8. To have two safety-valves.
9. Height from rail to chimney-top 15 feet.
10. If less than $4\frac{1}{2}$ tons in weight, to have four wheels under it.
11. If over $4\frac{1}{2}$ tons, to have six wheels.
12. Not to exceed 6 tons in weight.
13. Not to cost more than £550.
14. The approved engine to receive the prize of £500.

An engine that should comply with these conditions must have been a most important engine. There was nothing like such an engine in existence; but the result would be, if achieved, a great stroke of luck. The engine and its builder would be the chief of their kinds, and the success would, besides, add to other benefits.

The manufacture of a locomotive at this time required a considerable amount of skill; it was a special calling. It belonged to few firms, for it cost much in time and money, and besides, the locomotive had but few friends; hence this trial. On the Stockton and Darlington railway, the engines worked for a long time very

indifferently. And why? Because the heating surface was small, and the waste of fuel was great; and the construction exhibited an almost incredible want of ingenuity. The owners expected work done, and the engines did none, comparatively speaking.

The factory at Newcastle was a "well," for the money went and did not return. This was not according to Pease's policy of life, and he wanted to get out of it. But George Stephenson had not sufficient gold to pay him out.

The locomotive at this very period was generally in great disrepute.

In many ways it had improved, but after all it was a costly article.

A good deal of all this was caused by Stephenson himself—not availing himself of the best boiler *at first.* In 1828 he employed a return-flue boiler, as Hedley had done in 1815. Here we have twelve years in which the best boiler was disregarded. The complaint was always that there was a want of steam.

It was an enormous sacrifice on the part of Stephenson to ignore Hedley's boiler for so extended a period.

Now, the peril involved in this proposed trial could not have been better appreciated by any one than by Stephenson, and therefore he permitted nothing to escape that would increase the *heating surface.* He was not only willing to copy, but to listen to any practical suggestion, and, by doing so, he planned the Rocket engine with horizontal flue-tubes. This was an idea given to Stephenson by Mr Booth, the treasurer of the line. It was not a new idea, and no doubt Mr Booth had seen it applied in steam-coaches. However, the idea came very opportunely, and brought

all the success which afterwards fell to Stephenson's lot. It is a grand lesson, and it shows that greatness of character and fame do not always depend upon one's self.

He is great who does greatly in things of every-day life, and follows up the line of duty sincerely, and with a sense of humiliation, calling every man brother, leaving the marks of a bright and genial soul.

In the surmounting of difficulties in erecting the

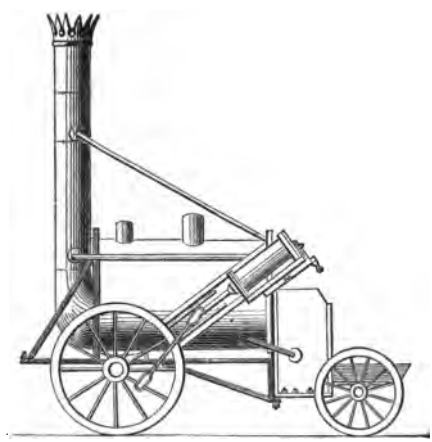

Fig. 11.—The "Rocket" Prize Locomotive Engine.

Rocket, there was a marked improvement; tokens of progress everywhere. Stephenson had passed at a bound to a tremendous success.

On the day appointed for the trial, the following engines were entered at Rainhill :—

The Rocket.
The Novelty.
The Sans Pareil.
The Perseverance.

The Rocket (Figs. 11 and 13) was distinctly different from the other engines, in having twenty-five copper tubes 3 inches in diameter, and a fire-box riveted to the end of the barrel, surrounded with water, much after the present style. The water-space at the sides of the fire-box was 3 inches wide. The cylinders, 8 inches in diameter, with 16½ inches of stroke, one on each side, were bolted to the barrel of the boiler at an angle, and the piston-rod and connecting-rods worked outside. The latter were coupled to crank-pins in the leading-wheels, which were 4 feet 8½ inches in diameter. The trailing-wheels were 3 feet in diameter. The exhaust-pipe was outside the boiler, and was carried along the side into the chimney, producing a good draught.

WEIGHT.

	Ton.	cwt.	qr.	lb.
Engine . . .	4	5	0	0
Tender loaded . .	3	4	0	0
Total . . .	7	9	0	0

HEATING SURFACE.

Fire-box	20 square feet.
Tubes	117 ,,
Total . .	139 ,,

PRESSURE.

50 lbs. per square inch.

For several days, the engines made preliminary trials, before the contest came off.

The next engine to notice is the Sans Pareil (now in the South Kensington Museum), made by Mr Timothy Hackworth. It was an attempt at something better than had hitherto been done, and, further, it represented the talent at Wylam at this advanced period.

George Stephenson's engine, Rocket, was a single-

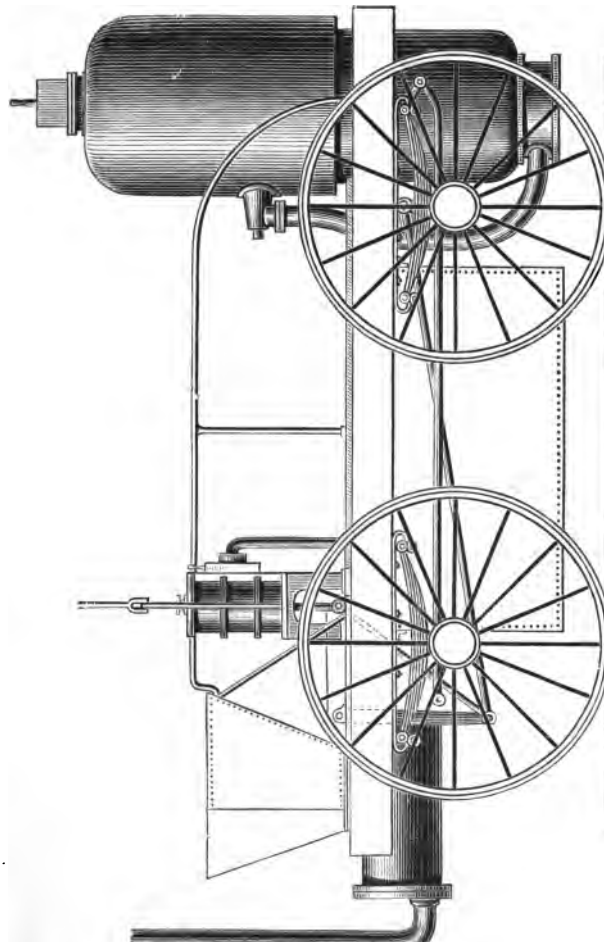

Fig. 12.—The "Novelty," by Braithwaite and Ericson.

wheel engine, the first that was ever made, and Mr

Hackworth's was a four-wheel coupled engine. The cylinders were placed in a vertical position, and the boiler was cylindrical with a return-flue, the chimney and the fire-door being at the same end of the boiler. This kind of boiler was known as the Trevethick boiler.

The fire-bars were inside the tube, as in a Cornish or stationary boiler. The piston-rods were connected by the connecting-rods to crank-pins in the hind-wheels, which were coupled to the fore-wheels by coupling-rods. It was a very simple and compact engine.

But of all the engines that were entered for the trial, none was so popular as the Novelty. There was more workmanship about it than about any of the others, and it had the appearance of being an ingenious construction. It was made by Messrs Braithwaite and Erricson. The day for the trial arrived, and it was made the occasion for a holiday by everybody about Rainhill. A "grand stand" was erected, and a charge of five shillings was made to have the privilege of witnessing the "horses" go from one of its seats. Shooting-galleries and all the fun of the fair were collected. Jokes passed pretty freely between boatmen and stage-coachmen ; both had a stake in the race, and a heavy stake too. The boatman could not see how his canal could be shut up by an engine, for had not God made the rivers to feed Brindley's canals? and there was no answer to such a clenching argument. The coachman was so much in love with his coach and horses that he was stone-blind. Did not He who made the lion to roar, make horses to draw carts and carriages? and what is the coach but a carriage? With an extra crack of his whip, he felt as safe as the bank.

It was a splendid morning, and the iron horses,

looked upon as huge creatures, were saluting the people with sonorous puffs from their iron nostrils, working to and fro in their harness.

Country people took a look at them, and each had his "clipper," and a little bet on. The spectators, one and all, as the time drew near for action, were excited beyond measure. The moments were alike fraught with lively interest to the locomotive engineers. The project had cost them many an anxious moment.

They, each according to his ability, had shown active interest in the matter.

All had a desire to lead against stationary engines. But each engineer that "showed" an engine coveted the prize; and not the prize only, for the merit that would be attached to it would be the making of a fortune. The capabilities of a locomotive engine were going to be most forcibly tested, and the popular points were strangely and absurdly jumbled together by the great concourse of spectators.

But, here is the Rocket before the judges. She is weighed, and found to conform to all the stipulations of the directors, and is placed on the trial length, which was marked out by two posts, 1½ miles apart, and she ran ten trips to and fro between the posts. The average speed was 14 miles an hour. The last trip was accomplished in 3′ 44″, or at the rate of 24 miles an hour. But just on her coming up on her return to the starting-post, about to have achieved the grandest victory in the world for speed, the Rocket struck Mr Huskisson, who was Member of Parliament for Liverpool, and who was standing foul of the road, and knocked him to the ground in front of the engine and run over him. He exclaimed to those who picked him

up, " I am killed." He was conveyed to Liverpool at the rate of 29 miles an hour, and died there.

The next performance was that of the Sans Pareil. On coming to the starting-post to be weighed, as the Rocket had been, this engine was found *wanting*. It is very difficult to understand how the deficiency could have happened. There were the conditions to be read and followed by all, and yet by not studying them and endeavouring to conform to them, this engine, the judges declared, could not strictly compete for the prize. The damaging feature in the engine was that it was supported only on four wheels, weighing $4\frac{3}{4}$ tons instead of $4\frac{1}{2}$ tons ; therefore it should have stood on six wheels. Its weight might then have reached 6 tons, and still it might have been admitted to compete. This was a very great oversight, and must have been a source of great annoyance to the builder.

However, the Sans Pareil was allowed to run, to show what it could do; and, no doubt, also to see whether by its extra weight it had any tendency to put the road out of order.

The first seven trips were performed very nearly as satisfactorily as those run by the Rocket; but, in getting through the eighth trip, the pump failed, and for want of proper precaution the lead safety-plug was dropped, and this accident closed the performance of the engine. The blast-pipe in this engine was not properly proportioned, and as there was no smoke-box, the red-hot, half-burned coke was carried away up the chimney. There was a great waste of fuel, of which the consumption was three times as much as that of the Rocket. Compared with the Rocket, it was an inferior engine in many respects, and it would not

have made a very good impression in the absence of the Rocket.

The Novelty was the next machine to receive attention. It was quite a differently designed engine from either of the others. It broke down by the feed-pipe bursting, and Mr Erricson would not proceed to trial.

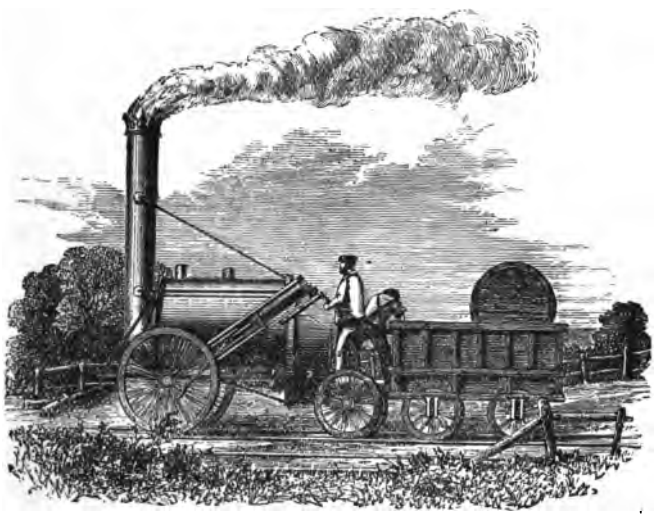

Fig. 13.—The "Rocket" at work.

CHAPTER XI.

GEORGE STEPHENSON, THE SUCCESSFUL.

GEORGE STEPHENSON had won—won all—won everything; and the fearless consistency with which he had acted made him the foremost locomotive engineer. Having once fixed his mind on the cause of the locomotive, he stuck to it with a devotion which has never been equalled.

He regarded it as the sacred business of his life, and now the dreams and cherished hopes of years stood ready to be realised.

After he took the locomotive engine in hand, nothing escaped him that could raise it; all the changes he made to-day removed some deficiency of the engine of yesterday. Hardly was one new idea reduced to fact, when another idea came to the front. From obscurity, he welcomed everything that would add to his reputation; and this working, unflinching perseverance drew him towards the one ultimate achievement, when he stands before us as a model—the author of his own advancement. He teaches us in a practical form that, under certain conditions, success is certain. He teaches us that the path in which our natural power is great is the right one. He teaches us that to speak with our own voice, to stand for our own work, and stamp it

with our own originality, is to follow close up to a triumph, sooner or later.

Every line in his life—page after page, and chapter after chapter—shows that, however humble our origin may be, our life, like his, is capable of indefinite growth.

His life was for a long time passed behind the scenes, and at times under a cloud. Remember how he wept because he had not six pounds with which to discharge the soldiering liability. The merciless severity of the conviction that he was uneducated, drove him again and again to the task of cultivating what nature had given him as his dowry—heart and brain. He found himself in a mist, and found his way out himself, for he had resolution, ardour, and courage, either to do battle or seek to reclaim whole acres of intellectual worth. Again and again he would invade his bewildered understanding in the meaningless altercation that went on within himself, in the sphere he was daily creating. Where was all this leading to? To the light. The conflict within was the unskilled utterances of the hopes and dreams of a young, ardent soul yearning after truth. He would, at times, be quite uncertain of his own aim; and all he could tell was that the more he knew, the less he found to talk about, and that his gains intellectually would be utterly disproportionate to his labour. But it is always so; it is really characteristic of solid advancement: the intellect slowly paces down the dark gallery that leads to the chamber of light. The new birth of the mind is accompanied by pain ere it can join the sons of light and knowledge. Have we never heard that the claim to knowledge without the prostration of soul was fatal to intellectual strength? It is. Until this ordeal is

passed the mind is unstable, it wanders, and it cannot be fixed on any particular question; it has not muscle enough to wield the sharp, dividing axe of argument, nor strength sufficient to receive a heavy blow in the battle of truth. Perils and honours in the realms of mind are elaborately wrought together, and there is no dividing them. Any one who will take the trouble to read the "Life of Stephenson," by Mr Smiles, will find there much to refresh his strength in the struggle to improve himself. He will see that Stephenson had his dark hours and his gracious moments, his rivals and downfalls, but by absolute sincerity of purpose he became the prince of his art—Stephenson the immortal.

Having reached his climax, he felt he was safe, in the right, and his enemies in the wrong. With a fascinating charm, after the victory at Rainhill the railway interest was always before him. Step by step, line *on* line, line *upon* line, here a line and there a line, improvements followed each other so rapidly that all further effort to establish the locomotive was completely ended. "'Twas a glorious victory," and all the art and skill that can possibly be summoned cannot *direct* how to find out what the consequences would have been if it had been lost; all conceivable conjectures teach nothing. It is well with us as it is, for it conferred upon the nation a fresh charm, imperfectly understood at the moment, for the nation never had such a gift before like it. But, as years roll on, the world is gradually giving its mind to regard it, for its colossal value, for its attractions, interesting the minds of all.

PART III.

CERTIFICATES OF QUALIFICATIONS IN THE RUNNING SERVICE, LOCOMOTIVE DEPARTMENT.

CHAPTER I.

THE MANAGEMENT OF A RAILWAY.

THE service now performed by our locomotive engines is splendidly done. The service that could be performed in case of invasion is momentously important. The ease with which it could be done without risk is evidence of practical ability of the highest order. Ten locomotive engineers with their engines could transport ten thousand soldiers, trained ready for the field, to a distance, and in so short a time as was never dreamed of until Stephenson, by his desperate tenacity, reason, and rectitude, made it plain, and proved that it was practicable to hurry through the air, and contemptuously disregard cold, wind, darkness, and everything else. The railway has grown; and with its growth there has followed employment for hundreds and thousands.

The colossal business of railways is divided into sections or departments, and the General Manager is at the head of all.

He is a man with fine administrative ability, quick as lightning to distinguish pretence from real worth, and to see through character. He is like an officer in command of a great army; and unless he is full of expedients for the destinies of all under him to come in review before him, there will be much dissatisfaction in the ranks. He is a man acquainted with human nature, and the service requires this insight more than anything else. The fussy, blatant fellow comprehends how soon his house of cards will fall in presence of the General Manager. The self-asserting become distrustful, though they are always on the look-out to catch his eye. The babbling fellow is afraid lest some one else will supersede him in the General Manager's opinion; and, to convince him and the world of his value, he puts on cheap ornaments and stucco decorations, and is as tawdry inside as outside. Cut him up, and he will be found full of dead men's bones. What a smart fellow! Silly fool! we know you to be boastful, quarrelsome, elbowing your way, and putting a value on yourself that never was and never will be yours. Such an one the sagacious General Manager plucks.

There is nothing like seeming what you are. You will lose by it *for a time;* but unflinching fidelity, never condescending to a trick, will make you lovable and loved. Have no false creed with a painted roof over it. Stand on truth, with the sky visible, and no one between you and the sun. Such an one the General Manager looks on with honourable regard.

In the locomotive department, the chief is the Locomotive Superintendent, who ranks as one of the highest officers in the railway service. His position requires

that he should have received a thorough mechanical education, trained at the vice, and by experience. He is an engineer in every sense of the word, loving nothing better than engines, and able to hold his own on any locomotive question; and those under him with like talents receive their just reward. When it is otherwise, talent starves and mediocrity thrives, and a fatal chill penetrates the better material. To co-operate with accomplished ability, and to hold the wand of his influence over all, is his aim.

The chief engineer of a locomotive department may be said to have two spheres, namely, the work of the erecting-shop, and the business of visiting the depôts outside. In the former vocation he builds engines, in the latter he hears how they answer. It is a simple arrangement, but it demands efficient talent.

He stands in the midst of ceaseless change, but he himself is unchangeable, mild and reticent, having mastered all the possible changes that can occur to the engine, or in the steam-shed.

In this should consist his superiority, and it should bring with it every possible obedience to his decisions. When it is not so, subordinate officials concoct plans to upset and even ruin, if possible, another official. He should be a Ulysses with his ears stopped, with a knowledge of the encyclopædia of the locomotive and of locomotive-working, so as to stamp out wild and quack panaceas, that can do no good at the best, and can only upset his men, and breed disgust and contempt, which is like dead fruit in the mouth. The scope and object of this department is mainly to work the traffic, and that being so, the great problem is to institute systematic accounts, to ascertain the minimum economy

and the maximum extravagance in the performance of the work ; and to strike a medium course—neither the minimum nor the maximum is safe. Discrimination is required to be exercised as a check or safeguard to maintain an efficient service.

The first step to be taken for practicable results, consists in the appointment of efficient foremen, well-selected, carefully drilled by force of experience and circumstances, understanding thoroughly the action of the natural laws of nature, detecting a deviation from right, and unravelling the mysteries of wrong.

CHAPTER II.

THE LOCOMOTIVE FOREMAN.

THE position of locomotive foreman needs the strength of experience. It requires and is generally held by men whose minds have been thoroughly annealed by the elaborate influence of cause and effect, found to pervade all locomotive working. He is as much at home under steam with a train at sixty miles an hour, as he is under the office roof. He is able to investigate the cause of engine failures, can pick an engine up or cure a choked fire, and knows how side-winds and storms affect the steaming power of the boiler, and prevent the engineers from keeping time. He is a fully-developed fact, in keeping with the engines in his charge; hence his claim to lead. Who can command unless he has served? He gives full proof of his position, supplying those under him with keys to unlock any boxed-up locomotive question, since he has himself by his necessary pursuits qualified himself to do so. To him there is nothing mystical in the operation of locomotive working; he has discovered the *elixir vitæ* long ago, an universal solvent. He attains this high state of efficiency by making notes, by prohibiting all attempts to let fancies, prejudices, or local influence deter him from "letting himself," body and mind—in

fact, until all is plain. He has seen for himself, and can speak as an authority.

A locomotive foreman should have served under the several forms or phases of locomotive life, having pursued a career and possessed gifts that fit him to lead locomotive engineers. It is possible for a man to have had a career of experience and yet not the gift of command. It is possible to have a gift and not the career. The real source of influence, weight, and power required for a locomotive foreman is sympathy. It is not merely as a driver, and he being a scholar, self-educated if you like: it is not merely he being able to discuss a popular scientific question, that a foreman will succeed or have an acknowledged claim amongst the men under him. It is rather by sympathy, it is as a teacher, that he will exercise his influence and be honourably respected. This is an influence due not so much to any great superiority of intellect, or length of service, as to the kindly fellow-feeling which one man should have for another; to the outspoken experience that accords with what the brother has seen, felt, and heard on the way. But, if the foreman has no experience of similar past events within himself, he is an iceberg, and what thrives before an iceberg?

A captain returning home to the admiral reports:—"Admiral, I lost my ship's anchor entering the Bay of Naples." "Well, and what then?" "Why, I had to get another." "Get another? what do you mean?" "I mean," said the captain, "that the tide, time, and circumstances would not allow me to recover the old one."

Now if the admiral is a book of experience—himself a sailor—he knows at once how much of the captain's

mishap is due to accident and how much to negligence. But if he is no sailor, the dignity and elevation of his office is lost, his reply will bear the marks of a man who either pretends to know, or, not choosing to look so small, snubs.

The interest which really surrounds the foreman is the same that surrounds the schoolmaster; and where it is not so, sooner or later there is sure to be trouble. A locomotive foreman's work requires plenty of energy, not so much for the work of general routine as to "plug up holes" that are daily made by wear and tear; and not so much of that as to find out how to reduce the number of holes every day. In one instance, engines were frequently late in leaving the yard, and therefore late at their trains, until it was made the duty of one man to see every engine away to its time, and book the time in a little pocket-book given for that purpose. Ever afterwards the nuisance ceased. It was said that the enginemen should get out of the yard, but it was proved that a block was caused by some men wanting to come in and others wanting to go out. All this inconvenience vanished by the introduction of a man who represented the foreman, whose responsibility did not cease until the engine was on the main line, or, at all events, clear of the shed points. Again, engines were late in getting up steam, because the foreman thought that he could put old heads on young shoulders, until experienced men who had been on the road, and reduced, were put to it. Such men having been drivers are the best of hands for the purpose of fire-lighting. Again, enginemen and firemen came late on duty for early trains, until a lad appointed to call them did not return from their residences without

receiving their number-tickets, which he brought as evidence of his having called and seen them. This put an end to that.

Engines were put away without coaling, the day coalmen and night coalmen shirking their duties, and shifting them from one to the other; but by paying them by the ton, they scrambled for coal tonnage.

Sometimes drivers were wasteful with coal until they were allowed so much per mile for each engine and each carriage; this mode of allowance made them frugal. If they could run with any less quantity of fuel per mile, they received a premium.

It was found that engines were frequently running the white metal out of the big-ends, on the first trip after washing-out the boiler. This was proved to be caused by the big-ends being below the level of the crank-ankle instead of above it, and the lime in the water dripped and lodged between the cheeks of the crank and the brass. A cure was wrought by orders to see that both big-ends were above the level of the shaft, before washing out the boiler.

Everything that savours of a deviation from what is right working should receive full investigation, and the conclusion when found should be made a note of. There is nothing impossible, and all things in locomotive working are easily remedied if the foreman acts with common sense; because there is never one wrong without another wrong somewhere about, and both must be dealt with.

If the head of one is cut off it will only come again —hydra-headed: but unhead both, and the end is absolute.

In the yard, the impress of the foreman's mind should

be definitely stamped on all things; and not in the yard only, but in the stores and in the time-office; on the shed floor, and shed walls; with the view of applying the example to the minds and hearts of the men, that they might repeat it on the engine: such sympathetic feeling for the men should be of a most energetic character, in looking after their requirements, and guiding them to the right, in all questions relating to their engines, and not leaving the men to find it out.

He should scout half-faith in all things—all things are possible.

Not wanting in the faculty of preventing others from making mistakes, trained upon the exactest observation and the acutest reasoning to regulate and work out men and engines to a right issue.

CHAPTER III.

THE ENGINE-BOY.

IN a large school like the steam-shed, the atmosphere is a strong solution of books, but all that is learned here comes of hard-earned experience.

The first stage in the experience of the engine-boy is a very trying one. High and mighty resolves he may have made to reach, by dint of perseverance, the highest place in the steam-shed, which to him is no other, more nor yet higher, than that filled by an engineer. But the continuous and absorbing demands upon his youthful energies soon try his mettle, and he either breaks down, or, surviving the ordeal, trots on hoping against hope to get relieved of such fearful work. His portion in the hive is to get into hot fire-boxes, where the heat is sometimes 250 degrees; and he must not flinch, but accomplish with courage his new and difficult task—namely, to clean the fire-box of clinkers, and work the cinders off the brick-arch. He is furnished with a torch-lamp, a short rake, and a steel broom. He uses the broom to brush down the tube-plate and prick the tubes out. In practice, the fire-bars are not pulled up by the fire-dropper, but the remains of the fire left in the box, after the engine has arrived from her trip, are taken out of the fire-box by

means of a splice. When fire-bars are pulled up and dropped into the ash-pan, the treatment not only tends to warp and even to break them, but it damages the ash-pan to a very serious extent; and, when this barbarous plan is employed, the fire falling against the damper not unfrequently renders it unfit for controlling the steam. Moreover—and as the best way to get over the work in a steam-shed is to have no work made at "home,"—the lifting of the bars places the engine-boy under the necessity of relaying them on the rack, or placing them on the supports fore and aft of the box. While he is doing this, he might have been cleaning and brushing many other boxes. The cry for the bar-boy, which is continually uttered, arises chiefly from his labours being rendered unnecessarily heavy by the absence of proper instructions issued to the engine-turner not to lift bars himself, and to correct others when they do so. It has occurred that in consequence of some bars not being properly cleaned, the engine has been "shy" of steam, and has lost time with a train, for which the engineer is bound to account. But he is loth; being a man, he is disposed to blame the boy, but ventures to cure the difficulty by pulling up the whole lot, rendering it obligatory of the lad to replace them in the frame. This is one way of knowing that all the clinkers have been taken out, but it is a miserable way, and the practice should be discountenanced by all foremen.

The only and proper plan is to see that the bar-boy is placed *under* the orders of the fire-lighter; and neither of them should assume anything about it, but the foreman should see that they understand it. The fire-lighter should be held responsible for the cleansing

of the fire-box, and for the raising of steam: there his work should begin and end. The fire-box work is becoming lighter every year, owing to the better construction of boilers; but, at the least, it is barbarous work to put a lad into a bath of hot air, and drive the perspiration out of him until his boots are full. There is not so much of this kind of work done now as formerly; some of the oldest engineers can remember the time when they have come out of a box all ablaze, with blistered legs, scorched eye-brows, and a face as black as the night, looking like an imp of darkness. Upon one occasion a "boskey" man, who had the key of the street, sought and obtained a night's lodging in the shed; he was shown a comfortable place in front of a fire made with half-a-dozen bricks and a few iron bars on the top. He lay with his nose and face buried in his folded arms. Whisky Bill, a fire-lighter, conceived the wicked idea of having a "barney" with the fellow: barneys are frequent occurrences. It was arranged that the gas should be put out, and all the bar-boys called in, with their faces well blacked, each holding a bit of lighted tow and placed round the fire with the man in their centre. The lads having stripped to the waist and dishevelled their hair with tallow to make a stick up, the man was disturbed by the fire-lighter—a tall fellow with ugly lanthorn jaws and goggle eyes, stripped to the waist too, with a long piece of burning tow in one hand, and a short steel broom in the other. The shed was low-roofed and as black as soot. It was an awful sight, with an imposing effect. Half suffocated with smoke and the perspiration rolling off his brow, the man was assailed by the devil—the big fire-lighter—who asked him his busi-

ness, and how long he had been there, and what he was on the *earth;* when the word "earth" was mentioned the man veritably believed he was "lost. "I ask you," said the disguised fire-lighter, with a voice like cast-iron, "what are you on the earth? answer, answer!" The fellow trembled from head to foot, and pulling some money out, Whisky Bill examined it, and informed him unfortunately the Queen's head did not alter the chances of any man there. "Make yourself easy," said the black leader to the man, "that neither gold nor silver will avail you *here;* one minute or less your algebraical formulas will draw upon you my imps." At this there was a general move and the man dropped—dropped on his knees—when all the imps shouted hurrahs three times by order of Whisky Bill. "I—I," said he, "when on the earth, was a supervisor." "And drank!" said the tall imp. "Alas! it is true; but be as merciful as you can," said the man. "I give orders that molten metal shall be thy next drink," said Whisky Bill, and just at that very moment we were all deluged with water and ashes with the hose-pipe through a window, and Goldspring, the exciseman, bawled out for mercy at the top of his voice, until a white-faced man went to his rescue. But Goldspring, the exciseman, never stopped drinking over algebraical arguments any more.

We will now quit the domain of the grotesque, and return to our subject. Engine-boys after they have done laying bars are promoted to wheel-cleaning; they have to clean all the wheels of the engine and the tender. If it be a large engine, that one cleaner cannot manage properly alone, he is allowed so much waste for this, and, in some sheds, the use of a bucket where the

wheels are washed instead of wiped. When they are wiped—and that is the best way—he is allowed an oily "patch," and if he is up to his work he will get another, or even two oily patches off the motion. Even in the most economically managed engines a small quantity of oil hangs about the motion. A good master makes good men, and a good foreman-cleaner is an invaluable agent, who in many instances moulds and forms many a lad's ways for life. First impressions never fade. If a lad does not meet with a foreman at first who is thoroughly qualified for his position and capable of teaching in more ways than one, it is a great misfortune to the lad and to the locomotive superintendent. All our cleaners, we may say, are ploughboys; and unless the right kind of influence is brought to bear upon them in the formation of their characters, at once on entering the steam-shed, ploughboys they will remain. There is plenty of proof that this is a fact, without our being required to write more in proof of it. But where are we to find a remedy? Not in drivers who have been reduced for drink, for insubordination, for want of respect for the property of the company, or for gross incapacity. Such an one put into office is a "mock pillar," a duffing attempt on the part of those who recommend it to pull a gorse bush through a chimney and not disturb the soot. Pitch defiles. Sometimes we see a cripple placed as a foreman-cleaner, and provided that he has been a very clean fireman, or driver, he may exercise the right sort of influence, but all cripples are not so qualified. The man who is set up to instruct should himself be a master, and the instructors in our steam-shed should have a master's ways and a master's command. All the ugly material travelling on the engine footplate at the

present time, that is too far gone to bend, is in many cases a chip off the old block. Very well. When the foreman-cleaner is a reduced man pushed into the job without any qualifications, he is always on the growl and wail. The calling, not having come from choice, is distasteful and unpopular. He has a bone to pick, depend upon it, with some one; and he will, mark it, call the cleaners round him to assist. His administration is a defective machine. Struggle there is none; he has collapsed. Dying from inanition; dead as a door-nail. Such are facts, not everywhere, not in every steam-shed; but still the evil above-mentioned exists. Again, when the foreman-cleaner is a reduced man, he enters the office with the conviction that he shall—like many another—be reinstated some day sooner or later. He knows it is only a case of "grin and bear it;" he considers that he did not take the berth, but that the berth took him. Why, it never entered into his head that he was appointed to receive young lads, speak kindly to them, and instruct them how to wipe an engine clean. If any one doubts this, he being an engineer, let him ask his cleaner when the foreman was under the engine last; and where his attendance has been slow, or has not existed at all, he will find the man not qualified to be an instructor again. When the foreman-cleaner is a reduced fireman, or driver, his wistful eyes always look in the direction of the lost "estate," and not at the dirt on the engine; and, what with intrigue and undermining, his hands are full without any waste in them; and during all this time the engines are accumulating dirt and wearing the motion out. When does such a foreman go under the engine and advise as to the best

way of *making a clean engine*, or for the purpose of showing a cleaner how to use his waste to the best advantage? Never. He may teach well-intentioned lads to grumble. Teach! he can only teach young beginners that the road to the lever is *not* found by energy, pluck, soul, and painstaking perseverance. He himself is a stone statue that sends a cold chill through them, and sends hundreds and hundreds away to the plough again. The intolerable atmosphere, and the treatment from such foremen, is at the least unpleasant. But many of these cleaners, after they have smelt a hot copper fire-box, go away to better themselves, very likely at a brewery; as what?—God spare the mark—an engineer.

Again, a foreman-cleaner with a leg off cannot very well climb in and out of the engine-pits, and therefore we have a "bad joint" at once; a foreman-cleaner with an arm off has a bad joint also, for the noble art of self-defence is not confined to the steam-shed. It has been called into requisition by the District Superintendent of the Northern Division of a branch. We have seen that a man labouring under the yoke of some painful visitation, whether incurred by incapacity or accident, is not and cannot be in a position to impart wholesome instruction to the rising engineers. Now for "true grit, the solid gneiss."

The foreman of the cleaners should have undertaken the office by choice, and should be qualified, by well-known habits of cleanliness, to warrant his being a pattern of order, and as clean as a pink. That there are men who have spent some time on the railway fit to fill such an office, no one will deny. Then why should it not be held by such men? There are drivers who,

on account of outside work being too trying to their constitution, are ready and glad to seek shelter inside. There are drivers whose "helpmeets" are always in fear lest the bread-winner should be "brought" home. Many a good woman has sat up until the hour is past for the "mail" to be in, and then laid down in her clothes, waiting for what has turned out to be a messenger of bad tidings.

"The foreman," says the messenger, "has sent me over to tell you there has been a pitch in, and the mail is not in."

That is all, but it is enough; no further information comes. She does not know where it is, nor how it happened, nor who caused it. "Anybody killed?" asks the frantic woman. "Don't know," says the messenger; "heard though that both lines were blocked."

"If you hear any more of it, will you," asks the driver's wife, "come and let me know?" The boy hears no more, because he is soon off duty, and the poor woman watches and watches until break of day.

The news comes that the driver is killed, and his fireman too. These sudden changes, made more awful by their suddenness, are common occurrences in the history of families depending for bread upon iron and speed.

Well, many a good man, from motives of kindness to his wife, is willing to take this office; men qualified in every conceivable way. Such an one, retired from the storms and other contingencies inseparably connected with the foot-plate, would traverse the shed with the cleaners full under his sway. With what delight, with what ecstasy they would clean under a man they were satisfied was neither a duffer nor an unfortunate

cripple, but a duly appointed instructor! On the ground that a good beginning makes a good ending, it is only logical to conclude that a bad beginning makes a bad ending. If this appointment had the consideration it deserves, the status of the engine-boys would be raised fifty per cent. in a very short time. We should have the best-wrought characters and bright-souled men. Look at the character of many of our steam-sheds now, especially at night-time; they are, in many instances, areas of blasphemy. Why do engineers, taking fifty shillings a week, refuse to enter their lads as engine-boys, and prefer sending them to trades at which they know perfectly well not near so much money can be taken every week?

Because they feel it would be sacrificing their children to Moloch, literally setting them in an atmosphere that would choke every good principle that had been instilled into them by good books and their mothers' prayers. Who are they then that fill our sheds at the present time, if the drivers refuse their sons? Why, in some cases it would be easy to prove that the cleaning-sheds are filled with the very scum of the earth, the lowest of the low, who cannot speak without an oath, who smell strong of stale tobacco before the sun that is at the meridian. The figures that some years ago used to call on us are getting scarce. Not the high-souled lad who, touching his cap, says, "Please, sir, I would like to be a driver; I would like to work at anything until my body is as big as my heart is now, and my muscles are matured for handling a regulator. Please give me employment."

One impression and one only, in keeping with their dress and odour, do they convey, standing every morning

chiefly outside the shed-doors; and that is the impression of the *cup* about the lips, eyes clouded and dull, and a voice like the screech of an owl. This is no exaggerated case. Ask all the locomotive foremen who have had bad foremen-cleaners if it is not correct. The picture seems forlorn and perhaps alarming to outsiders, but the experience of drivers clenches the fact. The atmosphere of the steam-shed requires cleansing quite as much as the Augean stables did; but where is the Hercules that will interfere, eager to effect a reform where reform is needed?

The rising engine-boys should be made to feel that they are cared for; and who can tend them better than a man who has his soul in the work?

The rising engine-boys should be stimulated in their arduous work by an ambition for something better. The drudgery of a cold night in a shed, when almost everybody is warm between blankets, should be counterbalanced by some substantial foretaste of the better future. How many hundreds of brave lads leave their homes and their charms every night, and, animated by a high ideal, spend it in a cold and wet steam-shed! How many hundreds break down in the effort to hold out! "I like the work, sir," said one about to leave, "but the night-work is killing me;" and the brave lad, lover of the "iron-horse," was laid in the grave in a fortnight. Boys of England! who seize every opportunity of going to the railway to see the engines, think of the night engine-boy, who is to clean the engine that your eyes rest upon. Would you like to leave your home and your parents, as night falls, to drudge, by gas-light, in and out of hot fire-boxes, to hear the clock strike twelve at night, and

then, within the furnace, eat your *night* bread and drink your *warmed-up* tea, a stranger amongst strangers?

Many a time the author has seen the silent tear roll down a lad's face on his first night from home. Let us remember the engine-boy. And let us try to suggest a plan that would, if carried out, make his calling pleasanter than it has ever been.

CHAPTER IV.

THIRD-CLASS ENGINE-BOY'S CERTIFICATE.

THE engine-boy should be registered or apprenticed for a term of years, after say a month's trial. Anyone with a very little knowledge of the human soul knows that it exists on hope, and that there is something within us that will, with a little encouragement, do great things. Can any one sum up or give any idea of the number of valorous deeds wrought alone by the hope of reward? Mark the truly heroic spirit, and what will it not endure for reward in the future? Clear to view is the limitless horizon to those who have hope. The hope of reward tempers the hard features of stern life, and it gives a man a certain power to stand alone and wait. How much more a dear boy? It is a low view of human life to depreciate rewards, especially rewards to be given to those who endure, who are instrumental to our pleasure. It is therefore worth consideration to entirely re-model what is unquestionably working badly, and to attempt to strengthen the individual character of the engine-boys. Recognising the fact that nothing now is held out to them to which they may aspire, it is hoped that the following suggestion will meet with the approval of railway locomotive

superintendents. An engine-boy should have a position to gain, and a position to retain.

After a period of time has passed, say one month from the date of his engagement, all the leading traits of his character should have manifested themselves; he should, if found suitable, be asked to have his name registered in the company's books, for a term of two years; and, provided that he is agreeable to this arrangement, he should be given a third-class engine-boy's certificate, the purport of which should simply be, that he was engaged by the company, at such a date, as an engine-boy, recommended by his last employer (Mr Sparrow), accepted by the locomotive superintendent, and agreed to by engine-boy R. Joyce.

CHAPTER V.

SECOND-CLASS ENGINE-BOY'S CERTIFICATE.

AFTER a time he should be allowed a second-class certificate, for *cleanliness*, *sobriety*, and *punctuality*.

Such a document would induce a boy to look to the main chance; he would feel that he belonged to somebody, and that he worked at something; and further, he would feel that, provided that he did his work properly, there would be a prospect of his obtaining a higher-class certificate. The effect of this system would be to separate the workers from the drones, and to bring the best engine-boys to the front. Once there, they would try and stop there, and hold their position. It would come to this:—A boy looks after his engine, and the engine would look after him. In point of fact, the boy would stand on his own merits. The system would not lessen the attachment of the boy for the engine. Not the least striking part of this scheme is its simplicity, and, in comparison with the existing practice of allowing so many boys to wipe down engines for a few days or a few weeks and then away, it has much to recommend it.

CHAPTER VI.

FIRST-CLASS ENGINE-BOY'S CERTIFICATE.

MANY a boy, intended by fond parents for quite a different fate, has dreamed of rail-life, of the speed, flight, and excitement of locomotive-working.

The passion, when genuine, grows with its growth. Leaving all things else, he finds his way to the running-shed, where he wonderingly regards the great steeds in their stable, with the oily perspiration clinging to their steely limbs, travel-stained, and covered over, from the chimney-cap to the tyres, with the dust of many a far-off county; but, home returned "right." In the shed we see the calm side; only a few hours ago the engines were chopping the steam off at the chimney top, and had settled down to their hard work with the strength of a thousand horses, urged along by hot steam, flying steel, brass, and iron nerves, that laughed in their power at the elements, which in their fury gathered round the swift-revolving wheels their utmost strength to test; but they were hurled off, and, amid lightning and thunder, down, down into the deeply-cleft valleys, the "Monarch" goes with its living freight.

Onwards the steeds bound, past pools and churches, past solitary signalmen, from county to county, in the

stillness of night. All nature rests. Here and there a light is seen twinkling in the distance; maybe where eyelids are swelled with tears; maybe that of some student burning midnight oil. Through the mist the twinkling stars shine like diamonds set in amethyst; but the cars and the iron horse onwards dash, by mile on mile, for leagues. The rolling sound is at last breaking, the sensation of crossing over some well-known bridge is experienced; the living freight rises, chatter, collect their bags, sticks, and hunt for their tickets; slowly the train rounds the curve and enters the terminus. "Well done, good and faithful servant!" The engineer examines his charge, and she is put into the stable. For what? To be carefully and thoroughly cleaned. By whom? An engine-boy of the first-class, whose merits and rank warrant his cleaning the engine to the satisfaction of the driver. And not that alone, he should be capable of turning his engine out a perfect picture, as an example for the boys in the lower ranks, and—as such engines attached to swift and important trains should be—a credit to every one concerned.

Further, to cultivate an honest pride, a list of engine-boys should be posted in the shed on the first of every month, giving the names in their respective classes. The list should be confined to the names of the boys who are registered,—steady and determined lads,—bound for the foot-plate.

Lastly, a good engine-boy should be well paid. The takings in some instances are not nearly sufficient to keep a lad respectably; they are most commonly paid according to age, but payment should be made according to merit. A good engine-boy should be made to

feel that his work is recognised. There is no encouragement for him to keep his engine clean, simply because he may happen to be, say, eighteen years old. No; the engines should be priced for cleaning, and the fellows who cannot give satisfaction on a large engine, should be sent to one that requires less cleaning and commands a lower price.

CHAPTER VII.

THE FIREMAN.

HAVING looked into the case of the engine-boy, and shown that the "sample" can be improved upon, it may be expected that an equal degree of attention should be given to the individual who occupies the position next above that of the engine-boy, namely, the locomotive fireman. Looking at him calmly, it may be said that, in general, he is about as far behind the engine as the tail of the train is. His qualifications vary, of course. There are some firemen who are not very far behind, either with the shovel or in education, but the "regular" man is, and few can deny it.

Taking the ordinary type of a fireman, if we were asked to describe him thoroughly, what he is, what he does, and what he says,—to write the truth we should have to state the question thus: He is a wonderer of the engine foot-plate, he lifts the shovel, and when a breeze comes he swears.

There is no collision in his mind that evolves scintillation; all his collisions are with waggons and carriages. But there is good material in him. In many things he is misinformed, but of most things he is uninformed; yet he is manly and honest, with plenty of Teutonic pluck, and as ambitious a man as ever broke bread; only his

earthly aspirations fall short of the mark, he is not intellectually happy. Without inquiry, without distinction, without the faith of endurance, he pulls the long winters through, amidst wind and rain, lightning and thunder, for "siller" only. He is a big strong fireman, without a single elevating thought in his body; but with clear views and sentiments as regards the bitterness of long hours with an empty dinner-basket, and the wind blowing from the east. The outward side of his life during his hours on duty is comparatively devoid of interest to himself and to others.

The real interest which belongs to that period in a young fireman's career which we are reviewing, is the inward development of mind, growth of character, and formation of that tone of thought which will direct him right away from the meaningless slip-shod track, knee-deep with false views. Instead of the short dirty clay pipe, the half chaotic brain, we want to see him stripped of old habits and old connections, and trained to take a firm grip of a locomotive question and shake the truth out of it. Many a fault has he now! He comes on the engine foot-plate, off the shed-floor, familiar only with waste, oil, and tallow, and is an ardent young fool. He has trodden unheeded on many a flower; he has lived for several years in the midst of locomotive difficulties and break-downs; he is a conceited pupil, and having no purpose in view, no aim, is mist-bewildered.

He dreams that, provided he is physically capable, he is intellectually fit for the position of a locomotive fireman. And is he far wrong in this? He is nothing more than a lay figure, which can resist the bursting of a thunder-storm as it can a soft southern

breeze. It is impossible to blame him for his stoic condition of mind; he did not make it, it was made and it waited for him. Under the present system, a man can stand still like a statue and receive promotion. Where are the traditions showing a state of things that kindles enthusiasm up and down the railroad? Where the footprints that mark the rapid progress of another? Where is he that scouted ease and by self-denial rose to place, with honours thick around him? Where is the victory? Alas! for the victory; for there is no battle where it is known beforehand how the day will end. No; it is to be regretted that there are no "stepping-stones" either; no points to lose or gain; no inviolable conditions, no competition to quicken, no rivalry to spur.

Now, what if there were? A great railway company is a colossal affair; its organisation is in many respects perfect, and the business is conducted precisely in the way that the army trains its soldiers, who are animated by a high and mighty resolve to succeed. Why? Because success will demand a better-looking coat; the coat in its turn will command respect; respect will command itself. Without these symbols of the best ability, from the highest to the lowest grade, the army could not exist without danger of demoralisation.

Now the locomotive department of our railways is a small State in itself, but its importance is nearly destroyed, not for want of ability, but for want of established grades in the ranks. Every railway company possesses a system in many respects peculiar to itself: we have no wish whatever to interfere with that, but in the surroundings there is nothing on a par with the high and lofty nature of the

service. The service performed by the locomotive department is well done, and upon it the destinies of hundreds upon hundreds of men, women, and children are dependent. Practically, it is a great power in the State, and yet it is worked by men upon whom no mark of distinction is bestowed. Eminent services are rendered without any acknowledgment except "bread;" and man does not live by that alone. He requires something more that will not perish, but will shine and cheer him in winter and in summer. Men engaged in such distinguished public service as our engineers and firemen are, should wear distinguishing uniforms, in keeping with the colossal power and authority supposed to be held by our great companies.

Were uniforms to be provided in connection with certificates of capacity, the characters of the engineers and firemen would improve in quality fifty per cent. at once. And, considering that it is usual for railway companies to furnish uniforms to *all* their other servants engaged in working the traffic, it would be but an extension of their practice, not an unprecedented innovation. It would excite no sudden revulsion of feeling in the service; but, on the other hand, it would be a most consistent acknowledgment of the services rendered by our brave army of loyal engineers.

CHAPTER VIII.

THIRD-CLASS FIREMAN'S CERTIFICATE.

CAN we imagine anything more worthy of a first-class engine-boy's ambition than a third-class fireman's uniform? He would come up triumphantly to the side of the engine foot-plate with a certificate for cleanliness, sobriety, and punctuality; and as he had risen step by step, maintaining his superiority by new-born strength, ardour, and enthusiasm, so he would necessarily be influenced by similar motives in dealing with the details of a somewhat similar course of training on the engine foot-plate. He would, in fact, like nothing better in life.

Love of the engine, and a desire to understand all the laws by which its movements are regulated, would grow with his growth and strengthen with his years. The papers, pamphlets, reports, all the journals published by the scientific and literary societies, would be eagerly read for the purpose of extending the boundaries of his knowledge. He would naturally, in fact, exhibit the same painstaking attention, application, and devotion to his duties, no matter in what sphere of duty.

"Train up a child in the way he should go, and when he is old he will not depart from it." These are true words, and they do account for much of the

greasy, filthy, and unfinished condition of many firemen at the present day.

Now, reverting to the project of granting uniforms and certificates. A third-class fireman's certificate may simply certify that the candidate can read and write, and explain the details of a locomotive engine. A key to the engine, drawn on a large scale, should be employed for this purpose.

A series of lessons preparatory to his final examination should be given to him by the driver who takes an interest in him.

At this stage the mode of preparing an engine for the road should be explained to him thoroughly, and not left for him to find out himself or "pick up" from the driver. Some drivers give no definite instructions about anything on the foot-plate, and a strange fireman soon gets into trouble with a choked fire, &c. He thus makes a bad start, and becomes a "fearful example" on the black list, and he may be heart-broken. To instruct a young fireman efficiently, he should be made to begin at the beginning. Thus he should arrive on duty about an hour before train-time, and at once join the engine. Do the talking that is required afterwards.

On reaching the foot-plate, he formally takes charge; but, before actually doing so, he should as soon as possible examine the state of the fire, of the water in the glass, and of the steam-gauge. If he find their condition satisfactory, he becomes responsible for what happens after; *but*, and this is a very important feature, if things are not all right, he should at once fetch the foreman of the steam-shed and point out all deficiencies to him. Sometimes engines have been short of steam when the fireman arrived; and, instead of going

at once to the right man, the man who should have steam up when the fireman arrives, he attempts to cure the defect himself, and the proportion of chances being against him he fails. It is absolutely necessary to bear this matter in view; many an engine has been late at the train by such a cause. It is wonderful how many railway men get into trouble by meddling with other people's duties. The following instruction is also worth pinning to one's sleeve: Provided that the engine is properly in steam, the first thing to do, with Welsh coal, is to make up the fire with the best lumps. The fire in the locomotive fire-box, to make steam well, requires to be made in the beginning to a form resembling the inside of a tea-saucer, shallow and concave, where the thinnest part of the fire is in the centre. Too much Welsh coal swells, and it is likely to choke the fire. To obviate this result, a young fireman should try to err on the safe side, and not put too much coal on before he has acquired sufficient experience. Just a round of lumps with a few shovelfuls in the two back corners should be the extent of his firing until he knows more of the matter. The fire having been made up, the foot-plates should be brushed. Afterwards the ashpan should be examined, in case it may contain a quantity of ashes; although, in well-regulated sheds, the fires and ashes are withdrawn from the fire-box and the ashpan, not carelessly but thoroughly.

The engine should then be set for oiling, the position of the crank being as shown in Fig. 14. By attentively observing the outside rods of a coupled engine, when the cranks are both down, and when the engine is rightly set for oiling, the work of setting the engine is very much facilitated. Everything about

the engine should be done systematically, and on principle. Where there is no system there is no certainty. The oiling may be done correctly; but, to be done successfully, it is necessary to begin at one place and take the oil-syphons as they come. Leave nothing to chance. The oiling being partly completed, leaving only such spyhons to fill up as can be finished at the train, the sand-boxes should be tested. This should be done before a fresh supply of sand is introduced into the boxes. Some firemen have filled up the dry sand-

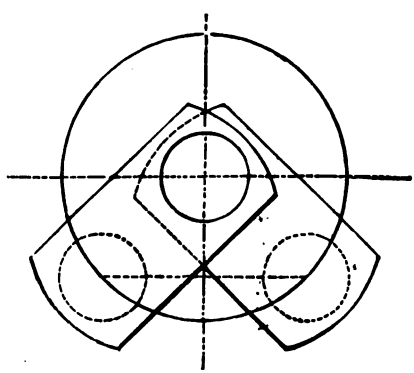

Fig. 14.—Position of the Cranks for the Inspection of an Engine.

boxes first, and then tested them, when they found the sand-pipe was choked with wet sand. They were thus compelled to empty the sand-box entirely, when it had contained perhaps from six to eight hundredweight of sand. The sand discharged into the pit was lost, and their labour brought to naught; whereas, when the pipes are thoroughly cleared first, the filling-up with sand may be completed without the risk of losing it all afterwards.

In some sheds a man is appointed to fill up the sand-boxes; but even then the sand requires to be tested before the engine leaves the shed. As the engine proceeds from the steam-shed, the pumps and sand-pipes should all be put through their exercise and prepared for action. It is a bad sign when a fireman is seen rapping sand-pipes when with the train.

After the train has left the platform, it is the fireman's duty to look back and see if any additional signal is made, which is sometimes done to stop; and when the fireman has not attended to this part of his duty, it results that some one rather too late for the train loses it altogether. It is extremely annoying to be present on the platform, powerless to join the train, simply because the enginemen are not keeping a sharp look-out.

When on the road it is essentially necessary to devote every thought to the engine and the traffic. The author has frequently travelled one hundred and fifty miles on the engine, on duty, and has not broken silence with his mate; each doing the work assigned to him, with the intention of doing it well. When under steam with a train, the duties of the fireman are very simple, provided that the laws of combustion are understood by him; but if he has no rule nor principle to work to, then his duties are muddled for want of a system. In many instances a fireman is delighted with his success, and for the life of him he cannot explain what it is that gives him an advantage. This is a misfortune in any enterprise. To be uniformly successful, it is essential that one should know exactly what the result of one's actions will be. If we do not, we work in the dark, as we cannot be said to possess any

knowledge of the subject. We work because we work results that we expect; not because we are qualified to control the circumstances.

The laying down of such rules has unquestionably effected a deal of good; and when every fireman, before he is sent to the foot-plate, is told where to deliver coals, as well as the quantity necessary for each round of stoking, many mishaps are prevented. The proper practice is to fire round the fire-box; discharging one shovelful of coals into each corner, one under the door, and one against the tube-plate. This practice is applicable to *flat grates*, in which the bars are inclined from the back of the box. The front corners generally provide for themselves, and the two shovelfuls of coal which should go into the front corners of a flat box should, on the sloping grate, be placed at the sides midway. The interval between the rounds of firing is controlled by circumstances. A light load requires but a light fire, of course; but the fire-box should not be stifled with smoke; neither should the tubes, nor the chimney. If they are stifled, the steam cannot be kept up to the "blowing-off" point; it is baffled, rising and falling and lounging in the steam-pipes.

Once more, before concluding this outline of a fireman's examination for a third-class certificate. Firing should never be done whilst the train is approaching junctions or stations, nor within the stations. In boisterous weather it should be done at selected places. The water in the boiler should be kept at the level which is most suitable for keeping up the steam. The working of the train and the traffic should be eagerly scanned. Try to *find out* something. Alexander

Bennet, driver at Eastbourne, does this. "Mate," said he to another driver at Hastings, "do you know anything?" "Know anything? What do you mean?" "I mean," replied Bennet, "do you know there is a broken tyre on a wheel of your engine?" "That I don't," said the man. There was. Bennet always tried to find something; and again at Hastings, in less than a month, he found another broken tyre; and this was soon followed up by his finding a broken rail.

Try to find out something; depend upon it things are not all perfect on a railway. There is a demand for quick intelligence; gain that, and the opportunity for exercise will come. Mark the incidents of a day on a railway, and your labours will be rewarded.

We have not entered into minute details of the occupations of a fireman, but sufficient has been indicated to determine how he should be taught at the outset. That in some instances he is not thoroughly initiated into his duties is a fact; and it has the effect of preventing his bettering himself on the foot-plate as he should do. But the scheme of placing a key of the locomotive engine before him for explanation, and explaining his duties to him in return, crowning the examination with a certificate, is the right way to produce a valuable fireman. Short of this, there is no distinctive feature. The service wants popularising. It is a worthy task to teach a man to love the engine and all its belongings, but until the character of the service is raised this cannot be effected. The engine must seize the intellect first, before the heart is charmed; and what is more likely to charm than the gift of a certificate?—a triumph in itself. No language can

tell how the youths ran at the Olympic games for the laurel wreath, and we know the scene has never to this day been surpassed. They sought not so much the laurel wreath as the approbation of their fellows gathered around them, amid gracious forms in marble, wrought as the outcome of high-reaching after excellency. We want, and hope to see, this spirit of rivalry amongst our engineers and firemen; but it is not theirs to find the wreath; we cannot forget that. There is therefore as much need for us to look for practical results from the heads of the locomotive departments, as from the men themselves. A competent master can see distinctly what the true mark of life and energy would result in.

Failures would be, as they deserve to be, exposed; and room would be left for those who approved of the new system to study the most momentous questions that would be in any way contributory to their advancement. There could be no pretended knowledge, which is an intolerable offence to a practical mechanic and driver.

CHAPTER IX.

SECOND-CLASS FIREMAN'S CERTIFICATE.

AFTER holding a third-class certificate for twelve months, and having been employed on shunting and goods engines, the fireman can be examined on all those questions that at the beginning were fully explained to him; so that all wild notions might be netted and put aside. The real business of the foot-plate, and the points of paramount importance, such as the preparation of the engine for the trip, and stoking to maintain steam on the road, should be questions for him minutely to answer. The object of such examinations is clear. He would work it all out in his mind, as well as in practice, and the effect would remain during his lifetime. There could be no possible doubt of his views being correct respecting his duties, and the locomotive superintendent would be enabled to form a tolerably correct opinion as to the man's capacity. There would be abundant evidence that the name of fireman as applied to him would, from his acknowledged abilities, be the strictly correct one; and with this symbol of progress a second-class certificate should warrant his being employed for some time on slow goods trains, then on fast meat or fish trains.

CHAPTER X.

FIRST-CLASS FIREMAN'S CERTIFICATE.

THIS certificate should be granted to the best firemen who have served some time on shunting engines, and been employed on the goods trains and on slow passenger trains. This symbol of competency should be sought after by young men who desire to succeed, men who, by dint of courage and unflinching perseverance, have acquired a permanent character for being clean, sharp as a needle, and anxious to obtain the very best position as firemen, in order to attain the foot-plate of the best express engines, where only the cream of locomotive knowledge is to be acquired.

Promotion according to merit is the order of nature, and it should be the order in every locomotive running-shed. The man who deserves promotion should be pushed on; there may be others—drones—who object; but who heeds objections when the principle is based upon right issues? They object, indeed! As well may the lesser ornaments of a city object to terraces, statues, fountains, cascades, and such-like. As well may the sweet wild rose in the hedgerow object to its cultivated kin of the horticultural garden receiving superior notice, as that mediocrity to rail against earnestness concentrated on one accomplishment, where all the actions are evolved from one common but comprehensive principle converging towards one ultimate achievement.

A fireman before he goes on to the engine foot-plate should know exactly what he is going to do, just as thoroughly as he knows that two and four make six. The points most requisite for him to understand are—how, and when, and where, many others have failed; and to acquire this is a great lesson. From the beginning of locomotive practice, the greatest failure has consisted in firing too heavily. The command of the shovel is a vital necessity for commanding success on the foot-plate. To know how, and when, and where to fire, are three questions in which every fireman should be interested; and every effort should be made to acquire all possible information on the subject. It is certain that he should not be left to find it all out. To fire well—mechanically—a position should be selected between the fire-door and the coal in the tender, to be occupied without shifting from it. It is quite clear that to roll about the foot-plate with the shovel is not an accomplishment, but is the movement of a man who does not choose the best and most efficient plan of handling the shovel. There remains much to be done in this matter—much discipline—before we arrive at perfection—before firing becomes an art, and is not a caprice. The shovel should be handled between the fire-box and the tender, in all weathers, as though it moved by the power of magic, gliding rapidly, empty, to the tender; moved, as it were, too hot to hold. By the establishment of a system of firing, by laying down certain rules for the use of engineers, many difficulties have been overcome, and the art of preventing smoke with extraordinary proficiency has been advanced.

CHAPTER XI.

THE ENGINEER.

THERE is not a class of men in this country like our locomotive engineers for steady perseverance, and for achieving results by endurance, with readiness of a certain kind to meet the requirements of their employers, for working the fast and most important expresses to time, weather and circumstances permitting.

They may be deficient in something,—such as a knowledge of latent heat, the nature of steam or gas to explain the principle of expansion; such as the composition of coal, strangers to the pleasure to be obtained by studying natural science. But there is in them plenty of good hearty service.

Many engineers are sufficiently acquainted with the locomotive to give every sort of satisfaction; but there are no grades in the ranks, though they are very much required.

The establishment of certificates would improve the service, and also the social condition of our drivers.

The measure, no doubt, has its difficulties, like all measures of a liberal character; but that is nothing new, it was always so, and ever will be. Shall we have them? that is the point. Shall we rise above prejudices

and old customs, and develop the service by instituting a system that has on the face of it no tangible objections, but, on the other hand, everything to recommend it? It would crown the great and mighty work of Stephenson.

Is it what he would have liked to have seen? No doubt of it. Nothing more nearly certain. After he had established the engine, most certainly, had he lived, he would not have stopped there, he would have established the engineman, who would have kept pace with the engine. Look at the facts. All the talent and administrative ability on the railways are industriously employed to improve matters. Art with all its life-saving apparatus is engaged. Plans for improved engines, improved vehicles, improved signals, and improved stations, are discussed and decided upon. Every accident which occurs is investigated, and a remedy is found for it. What for? To raise the character of the service to the highest possible standard. All is moving onwards in the hope of arriving at better results.

Provided railway directors, general managers, and locomotive superintendents were to offer their assistance—and it must come through them—to establish certificates, universally, for their drivers, firemen, and engine-boys, who would watch such a step with more interest than the public? Who would accept them with better grace than the drivers and firemen themselves? Could a gap be better filled up? If we compare the mental capacity of the engineers in the sister service—marine—with that of our railway engineers, the comparison is overwhelming.

Of course all marine engineers at one time in their career must have graduated through the lower ranks

before they were admitted into the higher ranks, and it is only by the great interest that they took in their *own promotion* that they were raised in the service. It was not because they were the children of humble parents or otherwise, but it was because they had eyes and saw—saw what? Rank. The fact of their lowly origin served only to spur them on; it did not impair their vision. There is just as good material in the railway department of the State as in that of the marine; but there is no rank, no coat, or gold-lace cap to attract. What does the uniform signify? It signifies that the person who wears it is a public servant intrusted with responsibility, and that the department he belongs to is more or less rendered efficient by his qualifications—natural, physical, and intellectual. Suppose we accept this definition to be the view held by the marine department; and if so, the responsibility of the sister engineering department is very great. Many of our drivers are intrusted with a thousand lives in one day, about twenty thousand a month. Some might from such startling figures be inclined to think that the service is well performed: why meddle with it? The answer is, The service is well performed: why not let the driver know you acknowledge it, by offering the best gift you have? Try him, and see if he will refuse it. No; the question is not whether under the present system the work is properly accomplished, but whether under an improved system it would not be better done. If the present system is *good*, the proposed system would be *better*. Anyhow, an improvement would be best for all. The highest pitch of efficiency has not been attained. The standard of qualification now is solely

height and strength combined, and it is the means of securing a very fair specimen of young men for the foot-plate. In many instances physical competition prevails, and the man with the biggest bone in his leg leaves many a mate behind simply because he is a big-boned fellow.

Now, a system of issuing certificates might be admitted, on which literary competition and physical competition can be applied; and the candidate for an engineer's berth might be still better qualified than he is now to occupy a responsible position in the railway service.

The literary element may be of the mildest character, but a little leaven, we read, will leaven the whole. It might consist of nothing more nor less than what is to be found under the respective subjects for examination in this work. Let every candidate undergoing an examination, offer something in writing also, on any subject bearing upon the point in question. Never mind if he imperfectly understands it, he will feel that he has been introduced into a new world of interest. Can any one doubt the rich literary ore there is in Mr D. K. Clark's articles on the action of steam in the cylinder? It is impossible to conceive of any one following the calling of a locomotive-driver being indifferent to the intellectual element in that matchless description of the movements of steam before and behind the piston in the steam-cylinder. No man should lose a day without mastering it, for no doubt there are many very good enginemen—enginemen of years' standing—who at first will find it as bad as Greek to them. But let them once commit it to paper, and the difficulties vanish—vanish for ever,—and the

element of literary examination is attained. How? Hundreds of men do not know if they are actually acquainted with the action and modes of steam. They think they are. Let them read the account of the action of steam in the cylinder during admission, the action of steam in the cylinder during expansion, and the action of steam during exhaustion, and to hundreds of men, from no fault of their own, it contains insuperable difficulties. Then comes the tug of war, and the battle which we wish to see will tear down all the old habits and customs, and success will crown success until glorious deeds in the regions of literature are achieved by railway engineers, brought to the front by literary as well as by physical examination.

CHAPTER XII.

THE THIRD-CLASS ENGINEER'S CERTIFICATE.

LIKE the fireman and the engine-boy, the engineer in the service of the railway has nothing by which to distinguish himself. After he joins the service, if he lives long enough he will be promoted to the position of driver, and he may, if he is smart and clean, be promoted over the heads of many others. He may be a model driver, and able to trace the history of the locomotive very accurately; but, with all that, there is nothing whatever to distinguish him from the greatest ignoramus.

There is nothing of a luring nature to draw out and force a man to arrest his thoughts and apply them to a locomotive question; nor are there any traditions of alterations or improvements in the service.

For half a century the men have been employed in England in driving locomotive engines, and have as a class discharged their duties with skill, patience, courage, tact, and courtesy. But there is a flaw in the system, and if it were removed the service would be rendered more popular, and the men would be raised in their own estimation, and in public opinion.

What is more searching than an examination? It is

a kind of conference with one's self, and it soon throws light on that which is not all right within.

What has just been advanced in evidence that certificates are the desideratum wanting for railway engine-boys and railway firemen, applies exactly, with equal force, to the railway engineer, and therefore it is not necessary to traverse the ground again.

No language can tell the effect that an efficient system of examination would produce on the service. The influence of the service would at once be raised fifty per cent. It requires no leader in the art of word-building to set up a plea in favour of this project.

It is not the want of merit on the part of the men that is sought to be benefited. Its justice is self-evident.

It is intended to mark an improvement, in keeping with the locomotive itself, and to crown half a century of driving, in which there have been great and valuable services rendered, for a heap of oily clothes and a little "siller"! The present system has no vitality in it, holds out nothing to look up to, and nothing to expect; no lasting or abiding satisfaction.

The defect of which we write has no existence in the marine service, and should it exist in the railway service?

Why should it? Every man in the marine service holds a certificate of his abilities, and he can feel that it is a power to him.

Why cannot we have this in the railway service, every man in possession of a certificate? such a one, if you like, that he can hang on the wall of his "castle," and point to with native pride, and say, "That is what I am."

Could anything equal this to make a man love his engine and his work?

Could anything equal this for his wife and children to look at?

Could anything equal it to say to a government inspector, in answer to his question, What are you? "First-class engineer, sir?"

If certificates were recognised, there would be no longer the marked diversity of appearance in the men that we see now. The best men would come to the front, drawn as the magnet draws the needle.

Here, then, we shall get a good man, a superior article, as transparent as crown-glass, with all sides alike, and without a flaw. Step by step, he will rise alongside the engine, and his degree will follow; proud of his work, he can face any one. There is, in an examination of this kind, something tangible and satisfactory to men. He has read his lesson, and is free to go. If it is thought necessary, let him write the matter out, and bring the document before his examiner; this will be of excellent use.

On his foreman's recommendation, the candidate for a third-class engineer's certificate should pass an examination in the following subjects:—

SUBJECT 1.—SIGNALS. To describe the use and proper observance of all signals.

1. Semaphores 2. Flags 3. Personal	Day.
4. Lamps (Lights) 5. Percussions	Night.

SUBJECT 2.—ENGINES. To describe the classifica-

tion of locomotives; showing that there are two kinds of locomotives, namely, those having inside cylinders, and those having outside cylinders; and that they are distinguished as single, or coupled: single engines, when the driving-wheels are free to act by themselves; coupled engines, when the wheels are connected together by coupling-rods; coupled in front when the leading and driving-wheels are connected, and coupled behind when the trailing and driving-wheels are connected. Locomotives that carry bogies in front, or behind, are known as bogie-engines. The use of the bogie is to enable the engine to traverse curves nicely, and with the minimum of friction.

Tender-engines are such as have vehicles for water and coal behind them. Tank-engines are such as have the supplies of fuel and water carried on the engine-frame.

SUBJECT 3.—BOILER. To describe the boiler. The boiler consists of six parts, namely, the barrel, the fire-box, shell, tubes, smoke-box, and chimney. The barrel is made of three rings of plates. When the longitudinal seams are made with a butt joint, the planed edges of the plates come together flush. Lap-joints are made when the plates overlap each other. The joints are held together with rivets, and the connection is made between the smoke-box and the barrel by an *angle-iron* ring, to which also is united the *front* tube-plate. At the other end of the boiler is the fire-box *casing* or *shell*; at the front it is fastened to the barrel, and at the box to a *foundation-ring*. The back-plate of the casing contains the fire-door and the gauge-cocks, and other foot-plate furniture.

The *fire-box* is within the casing, and is generally made of copper. The tube-plate is made stronger than

any other portion of the box, in order to carry the tubes; the back-plate is cut out so as to form the fire-doorway with the *mouth-pieces;* the fire-box is secured by copper stay-bolts to the sides of the shell, and by iron rivets to the foundation-ring; the roof of the box is secured from coming down, by over-heating or by over-pressure, by ribs laid across the box, or by stays to the shell. The lead-plug has a small hole drilled through its centre and filled with lead, which melts when the water is allowed to leave the crown of the box; the plug being screwed in through the plate, and projecting inside the boiler to some little distance above the crown of the fire-box, the plug is then carried upwards to give notice that there is danger of burning the copper. The tubes extend from the fire-box to the front tube-plate; generally made of brass, they are expanded at the ends and made water-tight in the fire-box end. Ferrules are driven in, which strengthen them. The smoke-box is secured to the front tube-plate and framing.

The door of the smoke-box is secured by a pinching-screw and cross-bar, and the latter is made to be taken out. It is supported by carriers that are riveted inside the smoke-box.

The chimney-top is sometimes fitted with a cap, with the object of turning aside the wind and to help the exhaust-steam and smoke to escape. The boiler-mounting consists of the following:—Clack-boxes, through which the water from the tender or tank passes to the interior of the boiler. The gauge-glasses show the height of the water in the boiler; water enters through the lower cock, and steam through the upper cock. The whistle, plugs, &c., form the re-

mainder of the mountings. The safety-valves discharge steam of such excessive pressure as is thought not safe for the boiler. There are spiral springs and levers used to hold the valve down.

The regulator is fixed within the boiler, and through it the steam is allowed to pass, when it is opened by the driver, into the steam-pipes, which are in direct communication with the interior of the steam-chest which contains the valves. The steam-pipes are generally of copper.

SUBJECT 4.—FRAMING AND MOTION. To describe the carriage and motion of an engine. The longitudinal framing-plates are sometimes double; two slabs are fixed on each side of the engine. When there is only one slab on each side, it is called a single-frame engine. The cylinders are of cast-iron, and are fixed between the frame-plates by bolts. The frame is also braced together by the motion-plate, and by transverse plates before and behind the fire-box. The horn-blocks are fastened to the frame-plates, and the axle-boxes work up and down with them. The slide-bars carry the cross-head on the end of the piston-rod. The piston is in the cylinder, and carries the rings that prevent the steam blowing through from one side of that piston to the other.

The crank-axle is supported in driving-boxes. Sometimes there are boxes on each end of the axle, inside and outside. It is only so with a double frame; the *big-ends* are the bearings for the brasses of the connecting-rod end; between the cheeks of the big-ends the excentric-sheaves are fixed. The cranks are at right angles to each other; and, when one is on a dead centre, the other is in full throw. The excentric-straps are

fitted on the sheaves, which revolve within them ; the excentric-*rods* that are joined to the top of the link are the fore-gear rods ; those at the bottom are back-way rods. The expansion-links are in some cases curved, in some cases straight. The curved link is called a Stephenson link, the straight link Allan's link, and a box-link Gooch's. When the excentric-rod is in as nearly a straight line with the valve-spindle as it is possible to get it, the engine is said to be in full gear. This is so with reference to either fore gear or back gear.

Inside the expansion-link the die works, connected to the valve-spindle ; the valve-spindle extends inside the valve-chest, and is fitted with means to move the valves over the opening to the interior of the cylinder. The valves are made to cover the ports, and sufficiently more than this to provide lap. There are two openings into the cylinder, the front port and the back port ; the middle port on the cylinder-face is the exhaust-port, and it opens to the chimney and the atmosphere ; only one steam-port at one time can be open to the exhaust. The steam in the cylinder from one side of the piston leaves it by the same way as it entered, when the valve uncovers the steam-port inside and ascends the chimney. The inside edges of a valve let the steam out of the cylinder into the chimney. The outside edges of a valve let the steam out of the steam-chest into the cylinder.

The exhaust-steam, ascending the chimney, induces the air to quit the smoke-box, and there is created a partial vacuum ; the gases in the tubes rush into it, and those in the fire-box in their turn enter the tubes, whilst the fire-box is supplied with air from the ash-pan.

The blast-pipe is in communication with the cavity in the valve, which is like a door into the steam-chest.

Feed-pumps are of two kinds, long-stroke and short-stroke. The ram of the short-stroke pump is called a plunger. There are three or more valves to a pump: top valve in the boiler, middle valve in the pump, and bottom valve in the feed-pipe. The top clack cannot be examined when the steam is up unless there is a cock between it and the boiler. The middle clack must not be examined with steam up, unless the top clack is steam-tight; the bottom clack is generally safe. The gland should not be packed too tight.

The injector is supplied with steam from the boiler, which is admitted into the injector when the water from the tender is laid on. The steam comes in contact with the water, which is carried by force into the boiler; the velocity given to the water by the steam in *motion* is sufficient to effect the entrance of the water against the pressure of the steam and water at *rest* within the boiler. When the jet of steam from the boiler is nearly condensed by the water, it will not work; and when the jet of steam cannot be enlarged, the volume of water must.

The axle-boxes work in the horn-blocks; they are fitted with brasses having white metal in them. The keep comes up under the lower part of the axle, and it is sometimes furnished with a recess for oil.

The cause of hot bearings may consist in the keep binding against the axle. Too much weight is another cause, and a fast-box binds on the axle. It may be caused by the cotton wick of the oil-cup being too thick or too slack, or requiring to be renewed when there may be shortness of oil.

Springs are laminated or conical. The former are leaves, or plates; the conical spring is a roll. The thrust-pin is placed between the buckle and the axle-box, and transmits the jerks of the road to the spring. Springs are said to be underhung when below the axle; they are fastened by a lip to a pin in the axle-box. Springs have sometimes links and socket-pieces.

SUBJECT 5.—VALVES, &C. To describe valves, &c. The lead of a valve is the amount of opening which the valve permits to the steam-port, when the piston is at the beginning of its stroke. The lead is given to enable the steam to fill up the steam-port and the *clearance* between the piston-head and the end of the cylinder, and to act as a cushion upon the piston, so causing it to reverse the direction of its motion easily and without noise.

Lap is the amount by which the length of the valve exceeds the extreme width over the cylinder-ports: designed to cut off the steam before the end of the stroke, and to allow the steam to expand during the remainder of the stroke.

Inside lead has an effect the reverse of that of inside lap, causing an earlier escape of the steam from the cylinder.

Compression results from the exhaust-steam not being all cleared out of the cylinder when the valve shuts the exhaust-port, the piston-head compressing it against the cylinder-cover in completing its stroke. For each stroke of the piston there are four periods of the distribution of the steam effected by the slide-valve.

1. Admission.
2. Expansion.
3. Release.
4. Compression.

CHAPTER XIII.

THE SECOND-CLASS ENGINEER'S CERTIFICATE.

As the examination of the third-class locomotive engineer was designed to find out what he knew of the engine, and how much pains he had taken to become acquainted with it, so the examination for the position of second-class engineer should be conducted for the purpose of ascertaining what his views are respecting an engineman's duties with an engine, and what he has done towards perfecting the art of locomotive-driving.

When brought up for examination, for the purpose of passing as a driver for the first stage, it was not expected that he could know anything of the experience of a driver, and therefore questions relative to working of an engine in steam—in full "go" with a train—were not put to him. He could know nothing whatever of the driver's side of the engine; he could know that by opening and shutting the regulator and keeping a good look-out, the engine could always be brought home with a whole buffer-plank; but he knew nothing of the working, the scheming, and foresight that a man—an engineer—in charge of an engine had to exercise to achieve such a result. Of this he was quite ignorant; but having spent some time on the engine foot-plate, and *felt* the responsibility of his

charge, and worked off all timidity on shunting and goods-engines, he is, or he should be, in a position to say something that should lead his superintendent to offer him promotion. Upon what? Upon the very best of testimony—namely, that of progressive experience and class-examination. And the true ring of the material would be detected. Would a man venture to face an examination who knew thoroughly well he would be plucked? Would a man fear who knew thoroughly well he should not?

As with the third-class certificate, the matter which is about to follow that is proposed to form the subject of examination may, if it is thought proper, be written, and the examination may be completed *vivâ voce*. If the man writes his subject, it will make him only more perfect, and there is nothing like writing a matter out to fix it on the mind. Bacon says, "Reading makes a full man, conversation makes a ready man, writing makes an exact man."

SUBJECT I.—WITH A TRAIN. To describe the chief points for attaining success. The first and most important duty of a man when in charge of an engine is to devote his whole heart and soul to its working; with a piece of machinery, it is true, as in most other things, that a good beginning makes a good ending. The chief thing to aim at with a locomotive engine about to be attached to a train is to insure a good start: by first examining the engine; and, secondly, by the management of the fire.

It is not uncommon for engines to fail from causes over which the "engineer" had control. Such failures could have been prevented had he examined his engine systematically before leaving the shed. It is im-

possible to mention all cases in which engines have failed; but most of those failures, which have been traced home to some piece of negligence, could have been prevented before the engine had joined the train.

To inspect an engine properly, so as to detect defects in the machinery or the arrangements of the engine, the inspection should be done by commencing at one end of the engine, and by following up the inspection until the end of the other side of the engine is gained. And again, when leaving the shed, the condition of the engine generally should have particular attention, to see that the sand-pipes, pistons, and valves work properly.

Next to the condition of the engine is the condition of the fire.

To depend upon the fire for making steam, it should be well burnt through at the start, provided that Welsh coal is used. If black coal is used, a fire should be put on of sufficient depth to suit circumstances, before leaving the shed; so that the smoke, or the greater portion of it, may be expelled, and may not become a source of nuisance in the station. It is possible to keep under the smoke if proper steps are taken in time, not unless.

The form of a fire should be concave, and the coals should be placed at first, and while the engine is running, round the fire-box. The oiling demands care and frugality; the causes of heating are various, and so far as the engineer is concerned all he can do is to see that all the trimmings are in good order and properly supplied with oil, and that the syphon-cups and axle-boxes have sufficient access for air. The management of the engine with the train is controlled

by the regulator, and the regulator is under the charge of the engineer.

The regulator should be judiciously handled, not only at the start but throughout the trip, so as to keep the water from penetrating into the cylinders. The trip should be performed to time, and without sudden snatches by notching the engine up with the steam on. This action should be avoided; so also should the action of starting suddenly from a station.

The steam should not blow off at the safety-valves, nor should the engine be short of steam, but the pressure both of that and the boiler should be kept at the working figure. To maintain steam on the road, the fireman, who should do all the firing required in first-class practice, should supply the wants of the boiler, or fire-box, with coals in such quantities as to prevent smoking, and the depth of the fire should be regulated by the load on the piston. The efficiency of a fire will depend more upon the latter conditions being followed out in practice, than upon anything else that can be mentioned in relation to firing. A choked fire is due to the fireman over-estimating the load on the piston, and it may stop a train as effectually as a hundred waggons will. While the train is under "steam," the attention of all on the engine should be given to it.

Any irregularity in the working of a train should be investigated, to ascertain how the irregularity is caused. The engineer of a late train should make signals indicating the safety or non-safety of the line to passing trains. In breaking down, either with an engine or train, if anything is to be disconnected, it should not be done where there is another engine near,

but the disabled engine or vehicles should be shunted into a siding at once. Uncoupling engines must be a subject of preparatory study, so that at the time of failing no time may be lost in making necessary arrangements. The coupling-rods, if one breaks, must both be taken off; and if a piston or a valve fails, the corresponding side of the engine must be disconnected altogether. If an engine is prevented from working by the failure of a piston or a valve, when both are disconnected from their respective connections, they should be pulled right back, and fastened there. This will not occupy much time.

Every failure that occurs should be investigated by every engineer in the service, to inform himself, and if anything is particularly striking it should be noted.

In providing remedies for failures the least possible amount of time should be consumed.

The train should at all times be under proper control, and in foggy or thick weather the engine should not be run at a higher speed than such as may admit of the train being stopped within danger-signals.

SUBJECT 2.—COMBUSTION. Combustion is the result of the chemical attraction in different degrees which exists between various elementary bodies. This may be well demonstrated by supposing a locomotive fire-box containing green fire, with the damper and the fire-door closed.

There are gases in the fire-box consisting of carbon and hydrogen; and there are gases outside—oxygen and nitrogen, in air. There is a chemical affinity between these bodies which is a species of attraction, and exhibits its importance immediately on opening the door. The air enters, and the gases unite with a

slight explosion due to the expansion of the gases, and flame is the result, consequently combustion. If there were no chemical affinity between the gases, there would be no explosion, no haste to evolve fire. Oxygen is the principal supporter of a fire, and the gases in the coal may be burned imperfectly, for want of more air—oxygen. If the air admitted is deficient in quantity, large volumes of smoke pass away through the tubes containing the distilled essences of the fuel, which, being heavily charged, lounge on the way to the atmosphere, and deposit accumulating quantities of soot in the tubes and the smoke-box.

Smoke is formed by the carbon, which is evolved from the coal not having received its proper proportion of oxygen from the air. That want of air is the cause of smoke, is demonstrated by opening the fire-door a little when the engine is smoking; the admission of more oxygen, or air, causing better combustion and reducing the smoke. When the oxygen of the air with the carbon and hydrogen in the fire-box are mixed and united in proper proportion, the heat is intense, and is sufficient to burn the carbon and hydrogen completely.

This also is demonstrated by results. When the fire-box becomes bright with heat, and no smoke is leaving the chimney, the boiler generates more steam. It may be noticed that when a fire-box is white hot, the heat causes the combustion of the soot which may be hanging about the tubes and the smoke-box. Imperfect combustion clogs the tubes with carbon; perfect combustion cleans them. Carbon is found in many forms; it is obtained from oil as well as from coal. It is contained in tallow and in candles. If the

hand is placed over a lamp to exclude the air, carbon is deposited instantly; that is a very good proof that air consumes it. The appearance of smoke issuing from a chimney-top is evidence that the volume of air, and consequently that of oxygen, admitted to the fire, is not sufficient to supply the amount required to enter into chemical combination with the gases in the fire-box.

If more air with its contained oxygen be admitted to the fire, the gases there will at once burst into flame; or, in other words, the oxygen will combine with them, thus: the hydrogen, coming off pure and in combination with carbon, unites with the oxygen to form water, the carbon takes another portion of the oxygen to form carbonic-acid gas, and the remainder of the carbon passes off in a state of very fine division as smoke; and hence the process of smoke consumption consists practically in supplying a further amount of oxygen to this carbon going off and consuming it, and thus forming another portion of carbonic-acid gas.

The quantity of atmospheric air necessary for the chemical combustion of one pound of an average coal is about 11 lbs.; but in practice a much greater quantity of air is required, for a large proportion is carried through the fire unused, by the force of the blast.

To consume the smoke in the fire-box—and as a matter of fact it can be nearly all consumed—it is required that the fire should not be too deep for the load on the piston, otherwise the blast may be choked at the grate-bars. It is a mistake to allow the gases which are given off to burn within the tubes by the dampers being shut; for the chemical action takes place too late, and a portion of the carbon escapes.

The principal conditions of the successful management of a locomotive fire are: 1st, Always to fire a little at a time, so that the amount of coal put on the fire shall never be so great that the quantity of gases given off is in excess of the proportional amount of oxygen supplied by the air required to combine entirely with them, and thus perfectly consume them. If they are given off in such excess, they pass away unconsumed, and thus waste of fuel is occasioned.

2nd, Always to so regulate the quantity of air passing through the fire, that there shall be sufficient oxygen supplied to completely combine with the gases, and that there should not be an excessive draught to the fire so as to permit the escape of a considerable amount unconsumed. The fact of the steam-pipes, blast-pipes, and walls of the smoke-box being thickly coated with carbon, together with the amount of smoke one often observes issuing from an engine, are evidence that something is wrong somewhere, either in construction or management; and that, at any rate, a large amount of the carbon, and in all probability other valuable inflammable heat-generators, pass away unused and wasted.

SUBJECT 3.—COAL AND STEAM. *Coal* is a carbonaceous substance, found lying in strata at various depths beneath the surface of the earth,—in England, France, Germany, Sweden, America, Australia, and India. The best quality of coal is found in Great Britain, in various parts of England, Wales, Scotland, and Ireland. These are all different in respect to their composition. The least inflammable kind is the Welsh coal, much used in English locomotives. It requires a considerable degree of temperature and of good management

to get all the heat-value out of it; but when it is properly consumed, it produces very little smoke or flame; and, if properly supplied with air, it will not clinker. It is the best coal for railway service. It has been found by analysis to contain a greater proportion of carbon than the bituminous coals, and it does not cake so rapidly in the fire-box.

Bituminous Coal.—Newcastle or Derbyshire. It requires a large grate to burn it thoroughly, and its greatest evaporative performance is only achieved when it is supplied in small quantities at a time to the fire-box, at frequent intervals, to prevent its clinkering. The draught of air from the grate should be allowed to have free course through it, and plenty of air should be supplied above through the fire-hole doorway.

Steam is generated from water at or above the temperature of 212°. When a fire is placed upon an open vessel of water, the water absorbs the heat from the heated plates, and when sufficiently heated it ascends in bubbles of steam, which collapse below or near the level of the water; as these globules ascend, fresh quantities of water descend and take up the heat, and ascend also; and the ascending and descending operation goes on until all the particles of water are of the same temperature. Then this operation ceases and another commences, and this takes place when the temperature of the water is 212°. The tremor or thumps heard in a vessel before the water boils arise from the heated globules of steam collapsing within the incumbent mass. This action is particularly violent when steam is blown back out of a boiler into a tender filled with cold water. It is produced by thousands of vesicles of water collapsing at the same moment. As soon as an experienced

driver turns the steam into the tender, he can judge, by the tremor which follows in the water, whether the water in the tender is cold, warm, hot, or boiling. Provided that the vessel in which water boils has no cover to it, and is open to the atmosphere, all the heat that can be applied under it would not increase the temperature of the water above 212°, and the steam given off would be of the same temperature, 212°. The harder the firing, the more steam is made away in the same time. No other result can possibly be obtained. The reason of the stationary character of the temperature is, that at 212° steam can resist the pressure of the atmosphere, and it therefore leaves the surface of the water.

In a locomotive boiler the steam is simply confined, and it accumulates until it reaches the desired pressure. Steam of 120 lbs. pressure per square inch has a temperature of 341° Fahr.,* and that of the water also is 341° Fahr. The steam and the water have the same temperature. The pressure of the steam is equal in all directions, and reference is made to this property when it is stated that a boiler has so much pressure per square inch. If a boiler is pressed to 140 lbs., there is 140 lbs. pressure on *every* square inch in the boiler exposed to the steam. Steam is invisible and colourless, hence there is no evidence of steam being in the boiler by looking at the gauge-glass. It is also elastic, and it is this property of elasticity that renders it so serviceable in the steam-cylinder.

When the regulator is opened, the steam from the boiler flows at once into the valve-chest, and if one of

* See Properties of Saturated Steam, in the eighth edition of the "Encyclopædia Britannica," article Steam, by Mr D. K. Clark.

the steam-ports is uncovered by the valve it reaches the cylinder. If there are many bends in the pipes, or if the pipes are colder than the steam, there will be a difference between its temperature and that of the steam in the boiler. But the total pressure at the rate of 120 lbs. pressure on the face of an 18-inch piston-head is more than thirteen tons, and if it should not require so much as that pressure to balance the resistance of the engine and train, the piston will be pushed along the cylinder to the other end by the steam.

The action of the steam in the cylinders has been investigated by Mr D. K. Clark, by a series of experiments made on a number of locomotive engines of various classes, and the results of those investigations were first published by him in "Railway Machinery," 1851-55. These were the first experimental demonstrations made into the behaviour and condition of steam in the cylinder, and they remain to this day a standard of reference for all such inquiries.

SUBJECT 4.—To describe the action of steam in the cylinder.*

The Action of Steam in the Cylinder during Admission.—In the flow of steam from the boiler to the cylinder, it meets with hindrances to its passage which usually operate to cause a considerable reduction of pressure when it reaches the cylinder, even if all the passages be thrown wide open. The actual charge of steam transmitted through an irregular passage of considerable length, and of a given sectional area, is, in all cases, less than what can be passed through an aperture of a very short length, as, for example, an

* Abstracted from "Railway Machinery," pp. 69 to 96. See also "Steam and the Steam Engine," pp. 265 to 273.

aperture in a thin plate of the same sectional area, owing to the bends and lateral friction of the long passage. It therefore frequently happens that the opening of the port allowed by the valve, though it may be much less than the total area of the port, is sufficiently large to pass all the steam that can force its way along the passage. This fact is constantly exemplified in practice: it is known that the opening of the port beyond a certain amount, which is in all cases less than the area of the port itself, ceases to be advantageous in facilitating the passage of the steam into the cylinder. Similarly, the opening of the regulator, or "throttle-valve," beyond a small fraction of the sectional area of the steam-pipe, does not add to the available pressure in the valve-chest. When the steam is not dry, containing water in suspension, the labour of moving in passages is greatly increased, owing to the quantity of dead inelastic weight to be dragged along; and the reduction of pressure is consequently much more than with dry steam.

Directing attention, for the present, to the behaviour of steam within the cylinder, it is to be premised that, notwithstanding the objection that has been urged against the ordinary slide-valve, worked by an excentric motion—the want of sufficient celerity of action—there is no material wire-drawing of the steam by the closing valve when the period of admission exceeds two-thirds of the stroke, unless at very high speeds of piston, exceeding from 500 to 600 feet per minute. When the steam is cut off at a shorter period, however, the travel of the valve being less, and therefore, also, its velocity of motion, the wire-drawing increases at high speeds, though at low speeds it does not. For example,

the indicator-diagrams (Figs. 15 and 16) were taken from a locomotive-cylinder 18 inches diameter, 24 inches stroke; steam-ports 13 by 2 inches; exhaust-port 13 by $3\frac{1}{2}$ inches; lap of valve outside $1\frac{1}{4}$ inch; inside $\frac{1}{16}$ inch. Each figure shows three diagrams for periods of admission, respectively 16, $11\frac{3}{4}$, and 7 inches of the stroke, the terminations of which, and of the expansions, are pointed off on the figures. For the first figure, the speed of piston was 240 feet per minute; for the second, 770 feet per minute. The wire-drawing at the lower speed was obviously nothing; at the higher speed, the pressure fell 3 lbs., 12 lbs., and

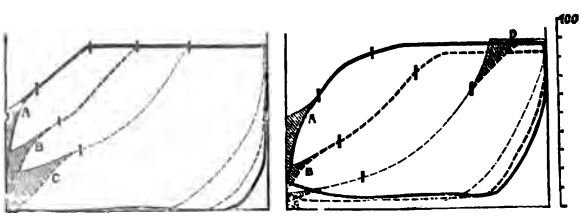

Figs. 15 and 16.—Indicator-Diagrams.

25 lbs. below the initial pressure, before the steam was cut off: doubtless explained by the fact that, in the three cases, the travel of the valves was respectively $4\frac{3}{4}$, $3\frac{15}{16}$, $3\frac{7}{16}$ inches; and the maximum opening of the port was $1\frac{1}{32}$, $\frac{11}{16}$ nearly, and $\frac{1}{2}$ inch. It was found, however, that, in the third case, with the shortest admission, the steam-line was practically straight and parallel to the atmospheric line, at speeds of piston up to 450 feet per minute. In inferiorly arranged engines, with short lap and short travel of valve, wire-drawing is considerably greater than in the example just illustrated. With the same sizes of cylinders, a $\frac{5}{8}$-inch

lap wire-draws considerably more than 1-inch lap of valve.

Long lap, in conjunction with wide ports, reduces the wire-drawing to a minimum. The more dry the steam is, the more susceptible it is of apparent wire-drawing, as indicated in the cylinder, because dry steam enters the cylinder more freely than wet steam, and attains a higher initial pressure.

As to the quantity of lead of the valve needful to insure ample and timely admission of steam into the cylinder at the commencement of the stroke, one-fifth of the length of the steam-port is sufficient. When the lead is excessive, the steam is admitted so readily as to be momentarily compressed, and to cause, in some cases, an unfavourable pulsatory action of the steam. The total absence of lead likewise occasions an unsteady pulsatory action in the cylinder. If lead is deficient or wanting, the maximum pressure of steam in the cylinder is not attained until after a portion of the stroke is traversed by the piston.

The Action of Steam in the Cylinder during Expansion.—When steam is admitted into the cylinder while the latter is comparatively cold, or colder than the steam, a very sensible condensation of the steam takes place during admission, in the process of heating the cylinder to the temperature of the steam, which continues to a certain extent during the period of expansion. A portion of this heat, though but a small part, passes off and is lost; the remainder is retained by the cylinder until it is re-absorbed by the precipitated steam, during the expansion of the remaining steam, if it be long enough continued; that is, until the temperature of the latter falls below that of the cylinder.

This is a destructive process, occasioning an absolute loss of steam; and the amount of steam thus injuriously precipitated, and but partially revived, increases rapidly in proportion as the steam is earlier cut off, and expansion is extended. In the cylinders of ordinary steam-engines the extra consumption and waste of steam devoted to the heating of the cylinder in the first part of the stroke, is above 12 per cent. of the whole steam consumed for a period of admission of one-third of the stroke. In exposed locomotive-cylinders the loss is proved to amount to nearly 40 per cent. of the whole steam consumed, when cut off at one-eighth of the stroke.

This important species of loss is inseparable from the attempt to work steam expansively where there is no provision for the heating of the cylinder, and maintaining it at a suitably high temperature—equal at least to the initial temperature of the steam. The magnitude of the loss is so great as to defeat all such attempts at economy of fuel and steam by expansive working, and it affords a sufficient explanation of the fact, in engineering practice, that expansive working has been found to be expensive working, and that, in many cases, an absolutely greater quantity of fuel has been consumed in extended expansive working, while less power has been actually developed.

With respect to the ratio of pressure to expansion of steam in cylinders, observed in ordinary practice, it may be sufficient to remark in this place, that the quantity or weight of steam in the cylinder is the same throughout the process of expansion, estimated in terms of the pressure and the volume of steam, as saturated at different points of the stroke, when the steam is dry

and the temperature of the cylinder is properly maintained; and that, consequently, the pressure of expanding steam in a cylinder, under such circumstances, may be determined with sufficient accuracy for any degree of expansion, in terms of the ascertained density of saturated steam. On the contrary, in cylinders imperfectly heated, where the steam is partially precipitated during admission, and during the first part of the expansion, the expanding pressure at first declines more rapidly than would be due to the maintenance of a constant quantity of steam, and afterwards less rapidly, rising above the expanding line of pressure proper for a constant weight of steam—equal to that contained in the cylinder at the commencement of expansion. This want of conformity is exemplified in a diagram (Fig. 17) taken from an outside-cylinder locomotive, with a stroke of 24 inches, at a low speed, in which the dotted lines show the expansion-curve which would have been described with a constant weight of steam. This process of successive condensation and re-evaporation is distinctly indicated, for no sooner is the steam cut off at A than condensation is made visible by the vertical sinking of the expansion-curve below the standard or normal curve, until the temperatures of the steam and the material of the cylinder become equal, when, as the pressure continues to fall, and the temperature of the steam with it, the curve rises and crosses the normal curve at C in virtue of a partial re-evaporation of the steam previously precipitated, caused by the cylinder itself, which, at first colder than the



Fig. 17.—Indicator-Diagram.

steam, and heated by it in the first stage of the expansion, becomes then relatively hotter, and partially restores the heat of which it had previously robbed the steam. The process of restoration of heat goes on to the end of the expansion, as further proved by the increasing excess of the indicated above the normal pressure at the point D, amounting to above 10 lbs. per square inch at the point of exhaustion.

That the condensing power of an unprotected cylinder is something very considerable, is rendered very obvious by an indicator-diagram (Fig. 18) taken from the same cylinder, in full gear, at a low speed, shortly after starting with a train. It shows that the pressure could not be maintained in the cylinder, as condensation in heating the cylinder proceeded faster than steam could be supplied through the opening of the port. Had the cylinder been hot, the pressure would have been fully maintained, according to the dotted line.



Fig. 18.—Indicator-Diagram.

The Action of Steam in the Cylinder during Exhaustion.—In no part of the distribution is the advantage of time more apparent than during the period of exhaust. It is plain, by reference to Figs. 15, 16, that the steam does not discharge itself instantaneously from the cylinder at the point of release, as the piston, in all diagrams, has visibly to go some distance before the pressure falls to a minimum. In the left-hand figure, at the lower speed, the piston moves 3½ inches from the point at which the steam is released, to the point at which the pressure falls to the atmospheric line. At the higher speed the steam only reaches the

minimum pressure of 2 lbs. when the piston has attained to the end of the stroke, through 5 inches of the cylinder. These are elementary proofs of the benefit of time for insuring a good exhaust.

As the velocity of steam escaping uninterruptedly would practically suffice to evacuate the cylinder in good time, to prevent the evil of back pressure, there is no doubt that the back pressure which does actually arise is owing to the circumstantial hindrance of mixed water, strictures, bends, and friction. The retarded motion of the piston towards the end of the stroke, in virtue of the action of the crank, is peculiarly favourable for the exhaustion of the steam, as it allows time for its escape before the piston returns upon it. At the higher speeds, however, the escaping steam may be overtaken and driven before the piston into the atmosphere, should its remaining elasticity prove insufficient, and then an opposing back pressure is established. The wider the lead for the exhaust the less is the back pressure, on account of the increased facility for escape. For the usual speeds of pistons of stationary engines—from 200 to 300 feet per minute—the back pressure is inconsiderable, if the cylinder be properly heated and the steam be dry. On the contrary, the back pressure is very great when the steam is condensed within the cylinder, or if it be loaded with water by priming.

The evil of condensation in a cylinder, in causing back pressure, was clearly proved in the case of a locomotive, into the cylinder of which steam was admitted at 80 lbs. pressure above the atmosphere, cut off at one-sixth of the stroke and exhausted at half-stroke. It was so loaded with water when discharged that it

incurred a back pressure of 12 lbs. per square inch in being expelled by the piston, which was moving at an average speed of 430 feet per minute. Shortly after, when the steam was admitted in a much greater volume, through half the stroke, at a speed of piston of 580 feet per minute, the exhaust pressure only amounted to about 2½ lbs. per square inch. The cylinder had been previously heated by hard work; the steam was comparatively dry; and the opposing pressure was, consequently, almost entirely removed.

The ordinary effect of the priming of muddy water from a locomotive boiler is illustrated by Fig. 19, in which are shown indicator-diagrams taken from the cylinder immediately previous and subsequent to blowing-off the boiler, when the water had been unusually impure, at the same speed of piston, about 600 feet per minute. The full line was described before, and the dot-line after, the boiler was supplied with clean water; and, other circumstances being the same, the back pressure fell from 9 lbs. to about 1½ lb. per square inch above the atmosphere. In some cases the priming of water into the cylinder has been found to reduce the effective pressure more than a half.



Fig. 19.—Indicator-Diagrams.

Summary of Data as to Back Pressure.—If the steam working in steam-engines could escape freely without resistance, the back pressure would be simply the pressure of the atmosphere in non-condensing engines; and in condensing engines it would be the pressure corresponding to the temperature in the condenser—what Professor Rankine calls the "pressure of condensation." The mean back pressure, however, always—sometimes

considerably—exceeds the pressure of condensation. One cause of this, in condensing engines, is the presence of air mixed with the steam, which causes the pressure in the condenser, and also the back pressure, to be greater than the pressure of condensation of the steam. The ordinary temperature in the condenser, in proper working order, is about 104° Fahr., for which the pressure is 1.06 lb. per square inch, whilst the actual pressure in the best condensers of ordinary engines may be scarcely ever less than 2 lbs. on the square inch. The principal cause, however, of increased back pressure is resistance to the escape of the steam from the cylinder, amounting to from 1 lb. to 3 lbs. per inch greater than the pressure in the condenser. There is no doubt that, practically, in condensing engines, the back pressure increases with the speed of the engine, and also with the density of the exhausted steam, and with a reduced size of the exhaust-ports. In locomotive engines, which are non-condensing, Mr Clark has found that the excess of back pressure above the atmospheric pressure varies nearly as the square of the speed as the pressure of the exhaust steam at the commencement of the exhaust, and inversely as the square of the area of the orifice of the blast-pipe; that it is less the greater the ratio of expansion; that it is less the longer the time during which the exhaustion of the steam lasts; and that it is increased by the presence of liquid water amongst the steam.

CHAPTER XIV.

THE FIRST-CLASS ENGINEER'S CERTIFICATE.

THERE is no royal road to fitness for the responsible work of locomotive service.

Promotion is attainable only by dauntless pluck, great power of endurance, readiness of resource, intelligence, and steady perseverance. Mere theoretical knowledge would never make an engineer rise to a high position; whilst, on the contrary, a man may have a reputation as a driver, and yet may have no special qualification such as one might think would distinguish him and would enlarge his mind, and raise the standard of intelligence.

Exercising self-help and self-reliance, and with a mind somewhat developed into a state of efficiency, the qualifications required of a second-class engineer to obtain his certificate might go far to raise the status of locomotive engineers throughout the kingdom.

If we look back by the way we have come, it will be seen that at each step something was required of the engineer to enable the superintendent to form an opinion of the candidate's interest in his work.

In fact, it is so arranged that a man becomes his own examiner; that is, knowing what is required of him, he drills himself into his work.

And why? To take higher rank, and take it creditably.

How often has it happened that ignorant and conceited drivers, having no capacity themselves, have propagated the evil of imperfect qualifications by their inability to explain to the firemen under them the general principles of the engines. There is not one driver in a hundred who ever thought of showing a fireman under him, just about to be promoted, how to test valves and pistons; or why engines are described as left-hand or right-hand engines; or of explaining the laws that regulate the combustion of fuel in the fire-box.

Why is this so? It is because the service is not animated by the spirit of inquiry.

It is therefore the object of these pages to deal with the question, with every question, that is likely to excite the spirit of inquiry.

As he would be a very peculiar railway man who would occupy such a position as we have sketched out without knowing, by the time he is fitted for receiving a first-class certificate, all about the engine and its working, we propose that he should on taking his second-class certificate pass a final examination in locomotive questions, and with a view to that point, the plan has been all along, from the beginning of his career as an engine-boy, to get all this matter thoroughly settled, and so leave the way open between the taking of the last certificate and the previous one to allow him time to make himself familiar with something higher than mere locomotive-working, something that he is not compelled to know in order to work an engine, but which thirst for knowledge has induced to acquire.

Experience is gained by mechanical attention to every-day duty, but intelligence comes through investigation.

We will therefore now enter into the realm of thought, and leave the business of the shovel and the regulator, and endeavour as clearly and lucidly as possible to deal with the questions involved, more or less, in the manufacture and the management of the locomotive engine.

Anything appertaining to the locomotive is to a thorough engineer in the highest degree a model, full of interest. Anything that contributes to enlarge his stock of information, contributes to his happiness.

SUBJECT I.—COMMON PROPERTIES OF BODIES. *Adhesion* is a resisting force, and it differs from cohesion. It is more or less powerful according to the nature of the bodies in contact with each other, and is approximately proportionate to the pressure between the surfaces. It affects everything without regard to bulk or figure. In the locomotive, it is a pressure in a downward direction, and is caused by terrestrial gravity, by which all bodies tend towards the centre of the earth. If it were not so, all things would be in a state of suspension, and an engine placed upon the rails on its wheels would not move ahead. The mass, engine, acted upon by gravity is drawn downwards; hence, weight, and for our convenience we support the engine on *points*. If these points were perfectly smooth, the engine, though impressed with a downward pressure, would slide easily. If the points are rough or mixed, there is a resisting power, and the adhesion is increased. By the application of external force, the resistance may be overpowered.

There is another kind of adhesion besides that caused by gravity, or weight, and one or two illustrations will suffice. Faced-up joints brought together with a little oil or tallow between them will require a slight force to separate them. Sealing-wax will adhere to paper.

Cohesion is the force by which the particles of a body are held together, and form solid masses. The driving-wheel of an engine is just as much a number of atoms as it is a number of "faggots," and the atoms can be separated in many ways; but it is sufficient for the present purpose to state that filing is one way of separating particles. The intensity of the cohesive force varies in different bodies, as may be observed in filing lead compared with the filing of iron; and filing iron as against steel, and so on until the file proves to be powerless for abrasion. Cohesion may be further illustrated by the force which is necessary to tear an iron bar or a thread asunder. The force required to separate the parts varies; and is not in all cases the same for two different pieces of iron, for the cohesive force in metals may be considerably increased by hammering, rolling, or drawing.

Compressibility is a quality in virtue of which solid bodies and gases may be reduced in size or volume. The compressibility of liquids is so small as to be considered insignificant; but, as a matter of fact, liquids may be compressed under enormous pressure, though very slightly indeed. The compression of iron, or of copper, under the hammer is effected solely by pressing the particles forming the body closer together. In a solid body these molecules arrange themselves as crystals, which may easily be observed by snapping a

piece of iron short asunder. These crystals of course have angles, and they are piled against each other, forming interstices between them. As the hammer comes down, the crystals are broken and driven more and more closely together. Hence the reduction in the bulk of the metal under such treatment.

Air, steam, and all other gases are compressible, and may under pressure be much reduced in bulk.

Elasticity is a property in bodies the very opposite of compressibility, and it differs in intensity in different bodies.

Many solids subjected to pressure do not alter their shape in the least when the pressure is removed. Such stolidity is far from being the case with both water and gas. Water is eminently elastic, as was proved by a celebrated experiment in which water enclosed in a strong cannon was subjected to a high pressure of 15,000 lbs. per square inch; on the pressure being suddenly withdrawn, the cannon burst,—not burst under pressure, but actually after the pressure was removed, by the action of the water in resuming its original volume.

All gaseous bodies are elastic. Suppose we take a vessel and half fill it with water or wine. There it is. We can see it is half full, and further we can make a statement and say it is, for instance, a gallon bottle, and being half full it must contain two quarts. Very true. Now we cannot do this with a gas. It is impossible to half fill a bottle with air or steam.

Elasticity is powerfully manifested by twisting a suspended cord with a weight on the end of it. We may twist it, say, to two dozen turns by hand, and when it is allowed to untwist, it will not only untwist itself

twenty-four turns, but more times. The explanation of the circumstance of a cord untwining itself more times than are required for resuming its normal condition, is to be found in the fact that the molecules of the cord are not round. If they were round, in any body, there would be no such thing as elasticity by means of torsion; and from the fact of the molecules of the cord being angular, they are bound by the laws of nature, after being disarranged, to go back again into exactly their old position, and it is simply a manifestation of this desire and energy to recover their appointed places that carries them beyond their natural arrangement.

If these molecules were round, they would roll round each other. To illustrate how the particles of matter persist in holding their places—their appointed places—we will mention that a crooked bar of iron made straight by a succession of light blows will, after the scale is taken off by a turning-tool in a lathe, resume its crooked form. Shafting for a factory is seen crooked like this after leaving the lathe.

Again, when a child throws a ball upon the ground to cause it to bounce upwards into his hand, he accomplishes his self-imposed task and amuses himself solely because the molecules composing the ball, which were compressed in the fall, instantly rearrange themselves by the rebound.

Dilatation.—When matter in either of its three states, as a solid, a liquid, or a gas—and it is worth noting there are but three—is extended by any physical agency, such as heat, and not by human power, the process is called dilatation. The metals upon the railway are expanded by the physical agency of the sun's heat. In the thermometer, the dilatation of a liquid

—mercury—is employed to measure degrees of heat. Dilatation in conjunction with contraction in metal was well employed by M. Morin to straighten some walls in the Conservatoire des Arts et Métiers, where the weight of the roof had caused the walls to bulge outward. M. Morin fixed some strong bars of iron inside the building, reaching from the wall on one side over to the wall on the other side. Each end of each bar was screwed and extended through the wall of the building to the outside, and held by a large nut. The nuts were tightened after the bars were heated and expanded, and the contraction of the iron in cooling, shortening the length of the bar, drew the two walls nearer together. The process was repeated until the walls were restored to the upright position.

Here is a fine illustration of a sensible man, thrown on his own resources, calling to his aid a simple law of nature.

Density.—Having made the foregoing general observations of the nature and properties of solids, liquids, and gases, it may be added that some bodies are endowed with special properties, unlike others; and, again, some bodies have properties common to all, and yet have some special property of their own.

Iron is hard, glass is hard, yet one is flexible and the other is brittle.

Iron is hard, and steel is harder, but for many purposes iron is the more suitable metal, simply because iron has the property of ductility in a greater degree than steel, and is not so liable as steel is to be bent beyond the limits of perfect recovery.

All bodies have their densities, but the property of density is one of degree, and is regulated by the

number of molecules in the body, by their proximity to each other, and by the quantity of matter in each particle.

The term density is purely relative. If a body contains more matter than another, both having the same bulk, the one is said to be denser than the other, in proportion to the relative quantities of matter they contain. Or, if the one body contains the same quantity of matter as the other, but in a less volume, its density is said to be greater, in proportion as its bulk is less than that of the other. Hence the density is inversely proportional to the volume under which it is contained.

The relative quantities of matter in bodies are known by their gravity, or weight. According to Sir Isaac Newton, the original particles of matter being equal, and consequently endowed with equal gravity, bodies or assemblages of particles will have a gravity proportionate to the number of particles contained in them.

Observe: whenever a body, mass, or quantity of matter is spoken of, its weight or gravity is always understood, that being the proper measure of the quantity of matter.

The density of bodies may be found by weighing equal bulks of each. By this process solids must be previously reduced to the same shape or size, and in the case of the fluids the same vessel must be filled with them, and be weighed separately.

It is impossible to say that a body is dense without reference to some standard; and, by common consent and practice, the standard of comparison is pure water. A cubic foot of pure water weighs nearly 1,000 ounces avoirdupois. Assuming 1,000 to be the specific

density of pure water, and comparing all other bodies with it, their several densities are easily obtainable. Water being 1,000, cast-iron is 7,217, or more than seven times as heavy, bulk for bulk.

Malleability is a special property of great importance in the engineering world. It employs the labour of thousands of men. What should we do if it were impossible to make thin plates of iron? As it is, we can, by virtue of this property, build bridges and construct buildings—the Menai Bridge and the Crystal Palace, for instance—that we can look up to and enjoy. Now, if everything were say of the nature of wood, we should no doubt have something to admire, but we should have no steam-engines. Very well; malleability is a quality that can be regulated, modified, or intensified as it suits the craftsman. Steel rails, for instance, hot from the rollers, are allowed to cool gradually, and a satisfactory result is attained. They will bend, and not snap, when loaded with the weight of a train; but were the hot rail to be plunged into cold water, it would still be malleable, but it would be highly sensitive, and liable to break if surprised by a sudden pressure.

Hardness.—There is here a special feature. Hardness differs from density. Take a cubic inch of iron, and a cubic inch of glass, and we shall find—what most people expect to find—that the iron is the heavier; but notwithstanding that density is in its favour, the glass will scratch the iron, and the iron will not scratch the glass.

Summary: a body—iron—may be dense and not hard, and a body—glass—may be hard, very hard, and not dense. Explanation: The molecules composing

iron and glass are definite and susceptible to change; but, in forming masses, there is a difference in the angle of contact, which in the case of glass gives it a mechanical advantage.

Once more: the properties of metals are wonderfully modified by combinations of metals, or alloys.

In the axle-boxes of railway carriages and engines, alloys of copper, zinc, tin, and lead are employed for the bearings. Brass, which is an alloy of copper and zinc, if used without tin and lead in intermixture, will not do. All tin, no brass and no lead, would be quite as bad; lead only would be still worse. There is a mixture of the elements in such proportions as experience has taught the brass-founder are best; neither too hard nor too soft. The composition of the alloys in church-bells and tower-bells, that have a beautiful musical sound, is the result of much patient investigation.

SUBJECT 2.—EXPANSION AND CONTRACTION. *Expansion* is a characteristic of all bodies:—solids, iron:—fluids, water:—gases, air. It is caused by the application of heat. If zinc, lead, tin, copper, and iron were submitted to tests, the zinc would first expand, then lead, then the tin, next the copper, and lastly the iron. The expansion of bodies by heat is the result of the vibration of the particles or molecules of the material, slightly separating them. That it is so, may be proved by increasing the heat, and thus increasing the vibrations until the particles separate altogether, and the body or mass operated upon is resolved into a liquid. The melting of iron is an instance in point.

The expansion of bodies by heat is a fact of the highest importance. Without expansion and solution

of heat, we could not manufacture the articles we do in the arts, nor should we be able to raise steam, for steam may even be called melted water. The amount of expansion for equal degrees of heat is different in different bodies. If it were not so, then tin would expand at the same rate as iron. The copper fire-box expands before the iron shell does; and the excess of expansion is one of the causes of a fire-box cracking. Fire-boxes are not generally cracked in the cooling, the cracks occur during the heating. On this account, boilers should not be urged by steam-blowers. These blowers should be pitched out of the steam-shed, having ruined many fire-boxes. The force with which bodies expand is the supreme force in nature. It overcomes every resistance, and cannot be opposed. It is very great in locomotive boilers, and means have been provided, in the holes in the expansion-brackets, to make allowance for expansion. It may be observed by comparing the position of a boiler on the frame when cold, with its altered position when hot.

In early practice, the expansion of boilers by heat was not provided for in the construction of the locomotive, and the result was that inconvenience was caused by boilers working loose in the frames. Studs, holding what were called expansion-brackets, have been blown out of the boiler, and have delayed trains. These were not really expansion-brackets, but struts. It is a fact that all bodies are expanded by heat, varying considerably in extent. But all gases expand equally. Permanently elastic fluids are capable of expanding indefinitely, without the application of heat. If a gas be placed in a vessel, having a capacity of one cubic foot, and if it be enlarged to one foot and a half without

interfering with the gas, the gas would expand, and would continue to fill the vessel.

Water is seen to expand in the boiler. When a boiler has been washed out, and filled again half full of water, on the application of heat the water will rise in the gauge-glass. Heated tyres, heated bearings, and heated water, are all instances of expansion by heat.

Every solid thing in the world may be expanded by heat, and at a greater or less temperature liquefied or melted, and ultimately, by an additional accession of heat, vaporized as water is. There is every reason to believe that this earth was at one time in a liquid state.

Contraction is the reverse of expansion, and it is also a power in nature. It is generally produced by the abstraction of heat, allowing the particles composing the body to rest.

This well-known property is invariably made use of in fitting tyres upon wheels. The tyres are expanded in a furnace, and so enlarged that they can be placed over the rims of the wheels which they fit, and which were too large to receive the tyres when cold. The tyres, having been placed on the wheels, are allowed to cool, when they grip the wheels with enormous force.

It is by the force of contraction that tyres of wheels are caused to burst in winter.

There is an exception in the case of water. When it is cooled down to the freezing-point, it increases in bulk as it freezes, and exerts a prodigious expansive force, which is proved when it freezes within the feed-pipes of a locomotive engine and bursts them. This strange exceptional circumstance is caused by the particles of water assuming a crystalline form.

SUBJECT 3.—AIR AND WATER. *Air* is an invisible elastic body, and has weight. It is composed of two gases, oxygen and nitrogen. The latter by diluting the oxygen enables us to breathe the air. A very slight alteration in the proportion of the mixture would extinguish life.

That the mixture does vary is a fact, and where there is more nitrogen than oxygen it is favourable to our constitution. The reduced mixture is found to be of practical importance to invalids, who visit such places as Eastbourne and Hastings for the benefit of the air. Galileo taught that air had weight, and Torricelli found that it had pressure. These discoveries were made about the seventeenth century. They were corroborated by exact experiments; and it was proved that the pressure of the atmosphere was equal to the pressure of a column of mercury thirty inches high.

In virtue of the difference between the weights of mercury and water, the latter will rise in a perfect vacuum 34 feet, by the pressure of the air on the exposed surface of the water.

That is, if a tube 34 feet high be closed at one end, and the air be drawn from the inside, and the open end at once dipped into water before any air re-entered it, the water would rise in the tube to the top. An ordinary pump with good clacks will draw water close on 28 feet.

Dr Priestley, one day dining in company, being struck with the effluvia of the victuals, took the opportunity of examining the air of the room, and found it badly ventilated.

The means he used to secure a sample was very striking, and serves to illustrate the gravitation and

elasticity of the air, and reveals its real nature as an active power in nature.

He went to a sideboard where there were two decanters partly filled with water; he poured the water from one decanter into the other, and without any ceremony put the stopper into the empty decanter, and left the room for his laboratory.

He knew that as the water was poured out of the decanter it would be filled with air simultaneously, and that if he had left the decanter five minutes or five hours there would have been no more air in it than there was in it already.

Water is a transparent fluid without colour, smell, or taste. It is composed of oxygen and hydrogen. If the hydrogen be withdrawn, the oxygen which is left is the principal supporter of life. Hydrogen stands first for heating-power, as a combustible element of coal. Three-fourths of the surface of the globe are covered with water. Water becomes solid at 32° Fahr., and at 212° Fahr. it becomes a vapour—steam. It enters into the composition of all animal and vegetable bodies, and both man and beast can go longer without food than without water. It is capable of dissolving a greater number of natural bodies than any other fluid whatever, and especially saline bodies. Hence water is chalky in one district, and sandy in another. It exists in three forms or states:—solid, as ice; liquid, as water; and vaporous, as steam.

The expansive force of water is very great, as is well exemplified in the bursting of water-pipes in which the water is frozen, and also as a gas—as steam.

In the liquid form, water is incompressible, and is used with machinery for shunting trucks in the

goods yards of the Dundee Station of the North British Railway.

By calculating the weight of water raised into a vacuum-tube in the manner already described, philosophers found it would require a pressure of 14.75 lbs. (14¾ lbs.) to the square inch to do it, and therefore the pressure of the atmosphere is stated to be, in round numbers, 15 lbs. per square inch.

By neglecting the pressure of the atmosphere, many disasters have occurred. Air is as much a substance as anything else in nature.

In the turned joints of metals many misfits have been made in consequence of the elastic property of air not being properly recognised. Piston-rod ends and pump-rams fitting into cross-heads have, in an incredibly short period of time, worked loose by air lodged and compressed in the bottom of the hole in the cross-head.

N.B.—Having attended to the investigation of the general properties of matter, such knowledge cannot fail to help in our future progress, and therefore we have been most profitably employed.

But what have we learned? Why, that there is a marvellous consistency of purpose, of intelligence, of contrivance, of unerring truth,—that every particle of matter is bright in its humble sphere, invested with provisional powers having uniform effects. If any one doubts this let him follow on. Before us is a simple undecomposed substance—iron—found chiefly in the northern regions of the earth. The iron of commerce is obtained by chemical means, by means of known and fixed appliances. Vulcan erects an oven or a cupola, and bakes the iron ore; which operation dissipates volatile matter with which the ore is in its natural

state combined. Result: a lava. Vulcan breaks this into convenient pieces, and introduces them into a better furnace, with fluxes to deprive the lava of its iron. That done, the result is "pig"-iron. Vulcan, with experience and great practical skill, breaks up these "pigs" and bakes them, driving off the carbon, and the yield is a better iron. Vulcan puddles the iron upon the hearth, and brings it "to nature" from the state of crude iron to a pure, to a purer, and a purer still condition, until good steel is produced. One acquires a strong impression of the constancy of nature's laws, from the absence of all uncertainty in the results to be obtained from the same course of treatment. The laws of nature, and the properties and the power of bodies and their reactions upon each other, are ever the same. The study of natural philosophy proceeds on a fixed basis of truth, and to find new truth is the highest employment of the human brain. Sir Isaac Newton has laid down four rules for the guidance of inquirers, evident to the senses, in their investigations respecting the several parts of the grand machinery and agency of nature, to make the truth self-evident. He states: 1st. More causes of natural things are not to be admitted than are both true and sufficient to explain the phenomena. 2nd. And therefore, of natural effects of the same kind, the same causes are to be assigned, as far as it can be done, as light in a fire and the sun, reflection of light in the earth and in the plants. 3rd. The qualities of natural bodies, which cannot be increased or diminished, and agree to all bodies in which experiments can be made, are to be reckoned as the qualities of all bodies whatever: thus because extension, divisibility, hardness,

mobility, impenetrability, and gravity are found in all bodies which fall under our cognisance or inspection, we may justly conclude they belong to all bodies whatsoever, and are therefore to be esteemed the universal properties of all natural bodies. 4th. In natural philosophy, propositions collected from the phenomena by induction are to be deemed—notwithstanding contrary hypotheses—either exactly or very nearly true, till other phenomena occur by which they may be rendered either more accurate or liable to exception. This ought to be done, lest arguments of induction should be destroyed by hypothesis.

SUBJECT 4.—GEOMETRY. This is a branch of mathematical science, and it is an alphabet relating to form, extension, and magnitude of bodies, and used daily in general workmanship between one man and another. It is a scheme to classify different forms and call them by different names ; so that to attain to a knowledge of this alphabet is in every respect similar to the attainment of the alphabet of letters, namely, by acts of study until we are sufficiently acquainted to distinguish one form, or one letter, from another. In degree this science holds a very high position in mechanical constructions under the title of practical geometry, and the following is a selected portion that is usually employed in conjunction with the square and compasses.

A point (.) has position, but not magnitude.

A line —— has length, but not breadth or thickness.

A right line is a straight line.

A curved line changes its direction from point to point.

Parallel straight lines are a number of lines separate from each other, such that, if prolonged in either direction, they would never join: thus—(Fig. 20.)

Fig. 20.

A vertical line stands at right angles to the surface of the earth. It is a plumb-line. An engine bracketed to a wall is called a vertical engine—not a perpendicular engine. A B is the surface of the earth, or floor, C D is the vertical line. (Fig. 21.)



Fig. 21.

A perpendicular line is one that stands perpendicular to another line, in whatever position that line may be. It is not necessarily a plumb-line. (Fig. 21.)

An angle is a space between two lines which start from a point, the vertex—or it is a corner A. (Fig. 22.)



Fig 22.

A right angle equals 90°, A C D. (Fig. 21.)

An obtuse angle is greater than a right angle. (Fig. 23.)


Fig. 23.

An acute angle is less than a right angle. (Fig. 24.)

Fig. 24.

Triangles are three-sided figures which differ according to the comparative lengths of their sides. They group angles into figures, thus:—

A right-angled triangle is a figure which has one right angle in it, A B C. (Fig. 25.) The line from point A to point C converts Fig. 21 from a right angle into a right-angled triangle.



Fig. 25.

An acute-angled triangle is a figure which has all its three angles acute: the line from point *e* to point *d* converting Fig. 24 from an acute angle into an acute-angled triangle. (Fig. 26.)

Fig. 26.

An obtuse-angled triangle is a figure having one obtuse angle in it: the line from point *e* to point *c* transforming Fig. 23 from an obtuse angle into an obtuse-angled triangle. (Fig. 27.)

Fig. 27.



Fig. 28.

A square is a figure whose sides are all equal to each other, containing four right angles, A B C D. (Fig. 28.)



Fig. 29.

A rectangle is a figure of which the opposite sides are equal, and the ends equal, and the angles all right angles. (Fig. 29.)

A rhombos is a figure of which the opposite sides are parallel, and all the sides equal to each other, but the angles not right angles.

A circle is a curve extended by the compasses until the line returns into itself again. The line B A D is called the circumference; the middle, E, the centre. The radius E A is the line extending from the centre, E, to the circumference, A; it is the opening of the compasses when drawing the circle. (Fig. 30.)



Fig. 30.

Fig. 31.

The diameter of a circle is the distance from circumference to circumference, through the centre. When a big-end is gauged with calipers, the diameter is given. (Fig. 30.)

A segment of a circle is a part of a circle, G H I. It may equal a semicircle. (Fig. 31.)

A straight line drawn across a part of a circle is called a chord, A D. (Fig. 30.)

A tangent to a circle is a straight line drawn so as just to touch the circle without cutting it.

The rail is a tangent to the wheel of an engine; and the point where they touch each other is the point of contact.

A sector of a circle is a space bounded by two radii and comprehended by an arc, A E D. (Fig. 30.)

The radii are the two lines extending from a point at the centre to the circumference, and the arc is the curve between the two points.

The circumference of a circle is, for the purpose of trigonometrical calculations, divided into 360 parts; and each part is called a degree. Each degree is also divided into 60 parts; each of these parts is called a minute.

Each minute is divisible into sixty parts, called seconds. Degrees, minutes, and seconds, are symbolised thus:—

Degrees °, minutes ′, seconds ″. Read, for instance, 25 degrees, 15 minutes, 10 seconds = 25° 15′ 10″.

SUBJECT 5.—MECHANICAL DRAWING. There are standard works published which teach the art of drawing, and no doubt the statement itself will be sufficient to induce many to obtain them, and to place themselves under a course of training. But the most important point is, in all things, to make a beginning; once started, a great achievement has been accomplished. When Franklin made his discovery of the identity of lightning and electricity, people of the baser sort asked with a sneer, "Of what use is it?" The philosopher's retort was: "What is the use of a child? It may become a man!"

The following are a few of the simplest and most ordinary problems of drawing, which may be taken as examples for exercise, and introductory to an art

of much importance to those who have charge of the construction or the management of steam-engines.*



Fig. 32.

To bisect (or divide into two equal parts) a given straight line by a line drawn perpendicular to it.†

Let A B (Fig. 32) be the given straight line. 1. Set one foot of the compasses on the extremity A, as a centre; and with any convenient radius that is evidently greater than half the line, describe the arc C D; similarly from the point B, as a centre, describe another arc with the same radius, cutting the first one at the points C and D.

2. Through the points of intersection C and D draw a straight line C E D, this line will divide the given line A B into two equal parts, A E, E B, at the point E, and will also be a perpendicular to the line. It is not necessary in practice to draw the complete arcs. An experienced eye can readily anticipate the points of intersection of the arcs within small limits. Neither is it necessary to do more than apply a straight-edge to those points of intersection, and tick the point E, unless, indeed, the perpendicular itself be wanted, which is often the case.

The same process serves for the bisection of a

* From "The Workman's Manual of Engineering Drawing," by John Maxton.

† In presenting methods of performing geometrical operations, the T-square, parallel rulers, &c., will, where applicable, assist considerably on many occasions in simplifying the solution of the problems, and with an accuracy generally quite sufficient for practical purposes.

circular arc; for supposing A B to be the chord of the arc, the perpendicular which bisects the chord will also bisect the arc.

To draw a perpendicular to a given straight line from a given point in that line.

FIRST, When the point is near the middle of the line.

1. Let A B (Fig. 33) be the line, and C the point near the middle from which the perpendicular is to be drawn. On C as a centre, with any convenient radius, set off equal parts, C D and C E, on the line A B.



Fig. 33.

2. On D and E as centres, with a greater radius, describe equal arcs intersecting at F, and, if wanted, on the other side of the line also.

3. Draw the line F C—it will be a perpendicular to the line A B at the given point C.

SECOND, When the point is at or near the extremity of the line.

1. Take any convenient point C (Fig. 34) obviously within the perpendicular to be drawn from the given point B, place one foot of compasses on C, and extending the other to B, describe a circle A B D cutting the line A B at A.



Fig 34.

2. Set a straight-edge to the points A and C, and draw a line cutting the circle at D.

3. Draw D B, which will be the perpendicular required.

Another method:—1. From the given point B set

off on the given line a distance such as B A, equal to three of any units of measure, as 3 inches or 3 feet.

2. From B as a centre, with a radius of four of the same parts, describe an arc supposed to pass through D.

3. From A as a centre, with a radius of five parts, describe an arc cutting the other arc at D.

4. Draw D B for the perpendicular required.

This last method of solving the problem can be easily applied on a large scale for laying down perpendiculars on the ground. The numbers 3, 4, and 5, are, it is to be observed, taken to measure respectively the base, the perpendicular, and the hypotenuse of the right-angled triangle A B D. Any multiples of these numbers may be used with equal propriety, when convenient; as 6, 8, and 10, or 9, 12, and 15, whether inches, feet, or any other units of length.

To draw a perpendicular to a given line from a given point without the line.

FIRST, When the point is conveniently near the middle of the line.

1. Let A B (Fig. 35) be the line, and C the point without it. On C as a centre, with a convenient radius, describe an arc cutting the line A B at the point D E.



Fig. 35.

2. On the points D E as centres, and with equal radii, describe the arcs intersecting at F.

3. Set a straight-edge to the points C and F, and draw a straight line from C to the line A B. This will be the perpendicular required.

If there be no room below the line A B the intersections F may be taken above, that is, between the point C and the line. This mode is not, however, so good as the one already described, because it is not likely to be exact.



Fig. 36.

SECOND, When the point is near the end of the line.

1. Let D (Fig. 36) be the given point, and A B the straight line. From D draw any straight line, D A, meeting A B at A.

2. Bisect A D at C, and on C as a centre, with C A as a radius, describe an arc cutting A B at B.

3. Draw D B for the perpendicular required.

To describe a square on a given straight line.

1. Let A B (Fig. 37) be the straight line, or the base of the proposed square. Draw A C and B D perpendicular to the base, from its extremities, and make each of them equal to A B.



Fig. 37.

2. Draw the line C D; this will complete the square A B C D on the line A B.

To draw a line parallel to a given line.

FIRST, To draw the parallel at a given distance.

1. Let A B (Fig. 38) be the given line. Open the legs of the compasses to the required distance, and from any two points C and D (the farther apart the better) describe two circular arcs on the side towards which the parallel is to be drawn.



Fig. 38.

2. Apply a straight-edge tangentially to the arcs at

E and F, and draw the straight line G H; this will be a parallel to the given line.

SECOND, To draw the parallel through a given point.



Fig. 39.

1. Let C (Fig. 39) be the point; from C draw any line C D to A B.

2. From C and D as centres, describe arcs D E and C F.

3. Make D E equal to C F, and through the points C E draw the parallel G H. This is the line required.

The methods of describing squares and rectangles already given are also available for drawing parallels, though they are not so generally ready of application as the foregoing.

To divide a straight line into any number of equal parts.

1. Let A B (Fig. 40) be the straight line, to be

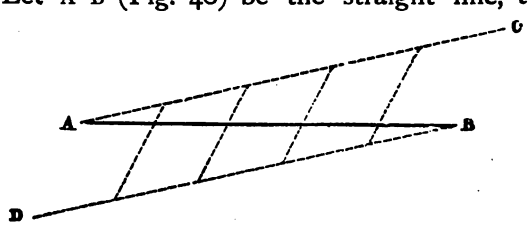

Fig. 40.

divided into say five equal parts. Through the points A and B draw two parallels A C, B D, forming any convenient angle with A B.

2. Take any convenient distance, and lay it off four times (one less than the number of parts required) along the lines A C and B D, from the points A and B respectively, and join the first on A C to the fourth on B D, the second on A C to the third on B D, and so on.

The lines so drawn will divide A B into the required number of equal parts.

With the assistance of the straight-edge and the set square this process may be considerably expedited. Thus, having drawn an oblique line C B (Fig. 41) from the point B, lay off five equal parts on it; set the edge of the square E to the point A, and the fifth division on C B; slide the square parallel to itself on the straight-edge F, in the direction A D, and draw parallels from the points of division on C B to the line A B. The latter will thus be divided into five equal parts.



Fig. 41.

To construct an equilateral triangle.

1. Let A B (Fig. 42) be the length of the side of the triangle. On A and B as centres, with radius A B, describe arcs cutting each other at C.

2. Join A C and B C; the triangle, A B C, thus formed is equilateral.



Fig. 42.

To construct a triangle having its three sides of given lengths.

1. Let A B (Fig. 43) equal the base of the triangle.

On A as a centre, with a radius equal to one of the sides, describe an arc.



Fig. 43.

2. On B as a centre, with a radius equal to

the third side, describe an arc cutting the former at C.

3. Join A C and B C. The triangle is thus completed as required.

To draw a straight line so as to form any required angle with another straight line.



Fig. 44.

1. Let B A C (Fig. 44) be the given angle, and D E the line upon which an equal angle is to be drawn at the point D.

From the points A and D, with any convenient radius, describe arcs F G and H I.

2. Set off the length of the arc F G, contained between the lines A B and A C, upon the arc H I, and draw D I. The angle E D I will be equal to the given angle B A C.

Longitudinal sectional elevations (or objects cut through lengthways vertically), longitudinal sectional plans (or objects cut through lengthways horizontally), and transverse sections (or objects cut through across vertically), are necessary drawings at all times, and to get measurements from the actual engine to make such drawings is often an impossibility, however essential it is to show internal arrangements, often made in the casting of a piece of machinery, and never seen again unless broken up. There is often no other way of showing the thickness of material than a section. If the object in question is in process of construction in the factory, the only resort for what is required for the purpose is the large original working drawings which show the structure of the interior parts.

In drawings of machinery it is usual to place the plan above the side elevation, and central on the paper if possible. End elevations or sections should be to the right and left of the principal elevation, and adjoining the end of the elevation which they severally represent.

When only one view of a steam-engine has to be made, the side elevation (or view showing the crank

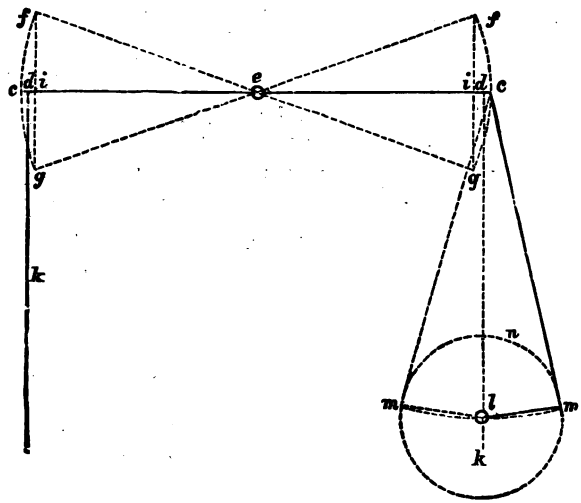

Fig. 45.

breadth) is the most likely to explain on what principle it is constructed. The side elevation of most machinery, other than the steam-engine, would generally give the best idea of the construction, when only one view is to be shown.

If two views are to be shown of the same machine, with the working parts in a different position, having once got the centre lines in each view, one measure-

ment by compasses should be applied to the corresponding part in each of such views, and thus save time by not doing the same thing twice over.

To find the centre line of cylinder and fly-wheel shaft in a beam engine.

Let the horizontal line *c e c* (Fig. 45) be the centre line of beam or lever when at half stroke, and *e* the centre. With the half length of beam *e c*, and from *e* as a centre, describe the radius *f e g* at each end, as shown; set off the extremities of the stroke or *vibration* of beam at *f* and *g*, a half on each side of centre line *c e c*, and join *f g* by a vertical line, intersecting the horizontal line *c e c* at *i*; bisect *c i* at *d*, and through the point *d* draw the vertical line *d k*, which will be the centre lines of cylinder and crank shaft.* To find the position of crank at half stroke. With half stroke (or distance *i f*) as a radius, and on the line *d k*, from *l* as a centre, describe the circle *n*—indicating the path of crank. The length of the connecting-rod is taken from the point *c* to the centre of shaft *l*. With the radius *c l* describe the arc *l m*, cutting the circle *n* at *m*, and join *l m* by a straight line, which will be the centre line of crank at either side of the shaft, when the lever is at half stroke.

The figures annexed are not intended for any other purpose than to introduce the use of the square and compasses. Figs. 46 to 54, and 58 to 60, are borrowed from "A Rudimentary Treatise on the Locomotive Engine," by Dempsey and Clark; and Figs. 49 to 51, 55 to 57, and 61, are borrowed from "Locomotive-Engine Driving," by the author.

* The centre of shaft is sometimes placed vertically under the end *c* of lever.

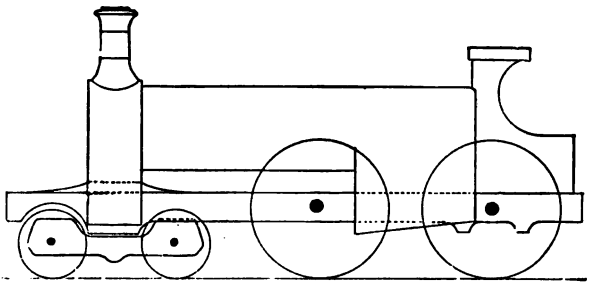

Fig. 46.—Stirling's Express Engine, Great Northern Railway.

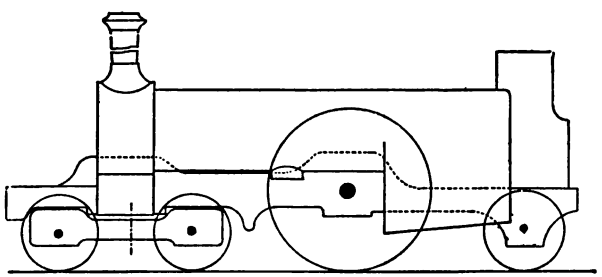

Fig. 47.—Johnson's Express Engine.

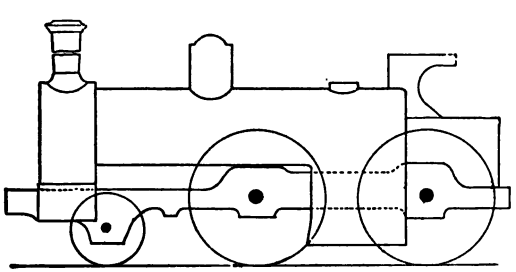

Fig. 48.—Ramsbottom and Webb's Express Engine.

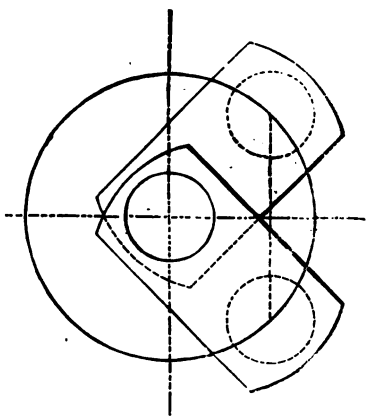

Fig. 49.—Positions of the Cranks for testing the Valves and Pistons.

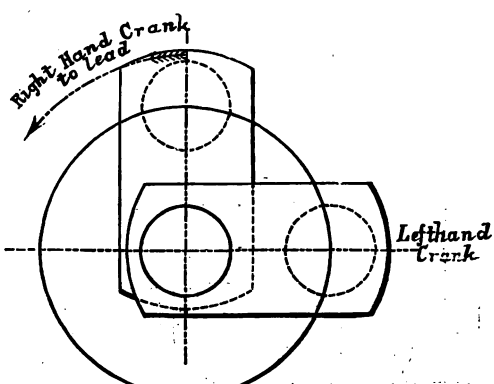

Fig. 50.—Cranks in a Right-hand Engine.

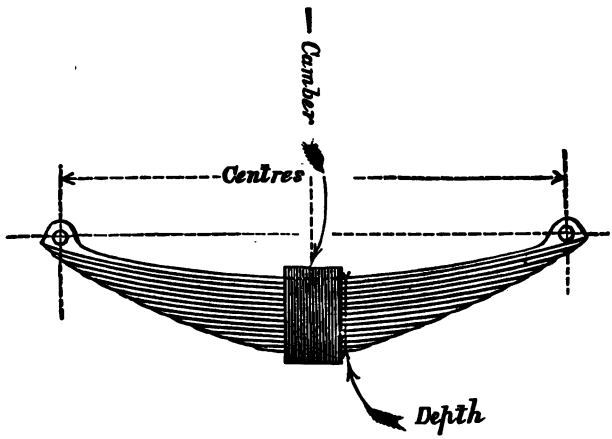

Fig. 51.—Laminated Bearing-spring.

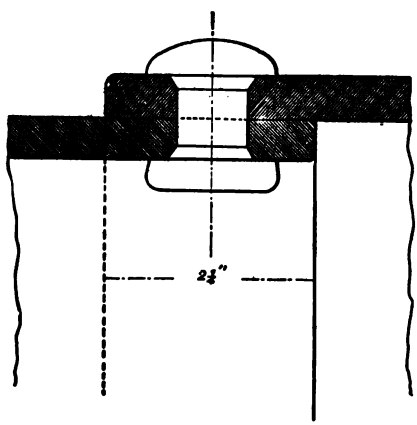

Fig. 52.—Single-riveted Lap-joint of Boiler-plates.

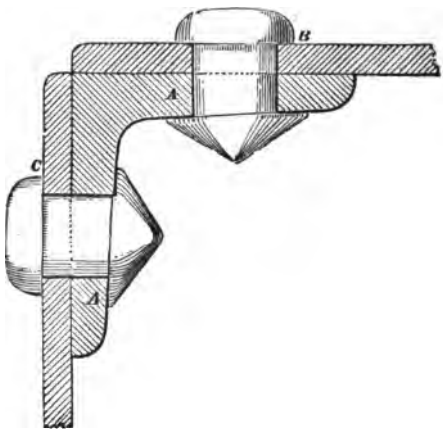

Fig. 53.—Section at Junction of Boiler and Fire-box Shell, Lower Side. ½ size. *A*, angle-iron; *B*, lower plate of barrel; *C*, front plate of fire-box shell.

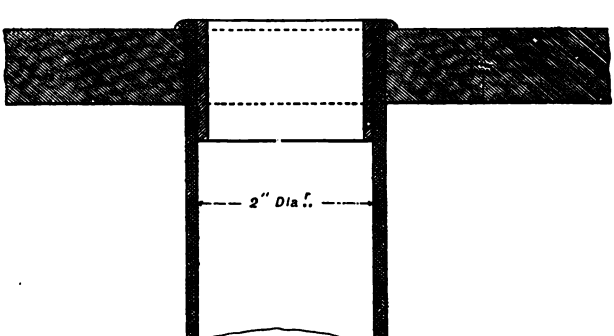

Fig. 54.—Fixing of Flue-tube into Fire-box Plate.

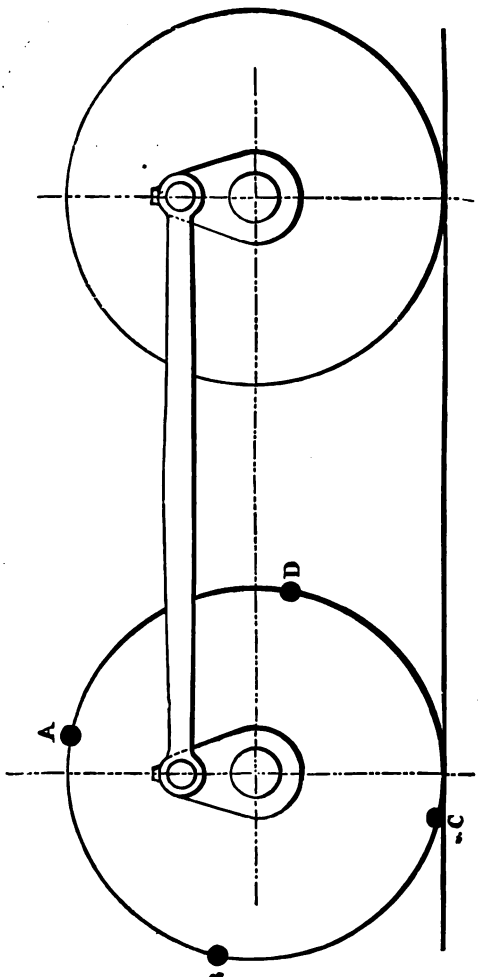

Fig. 55.—To mark the Beats of an Engine.

Fig. 56.—Modern Slide-valve.



Fig. 57.—Conical Bearing-spring.

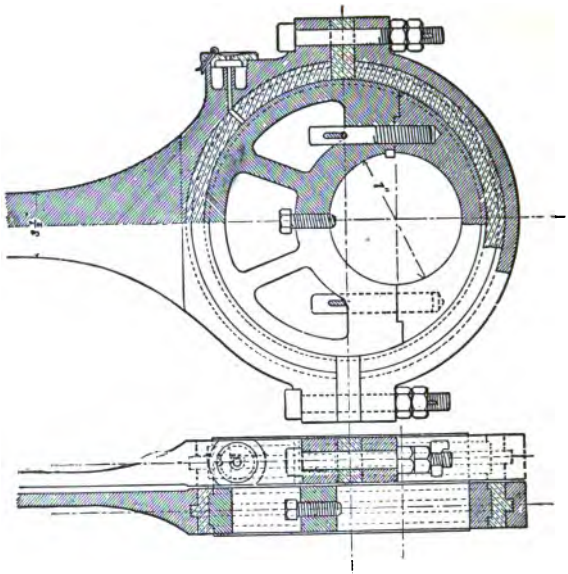

Fig. 58.—Excentric and Rod.

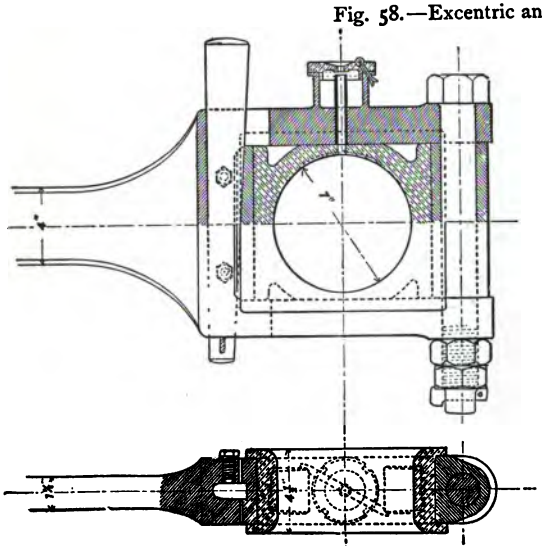

Fig. 59.—Connecting-Rod.—Large End.

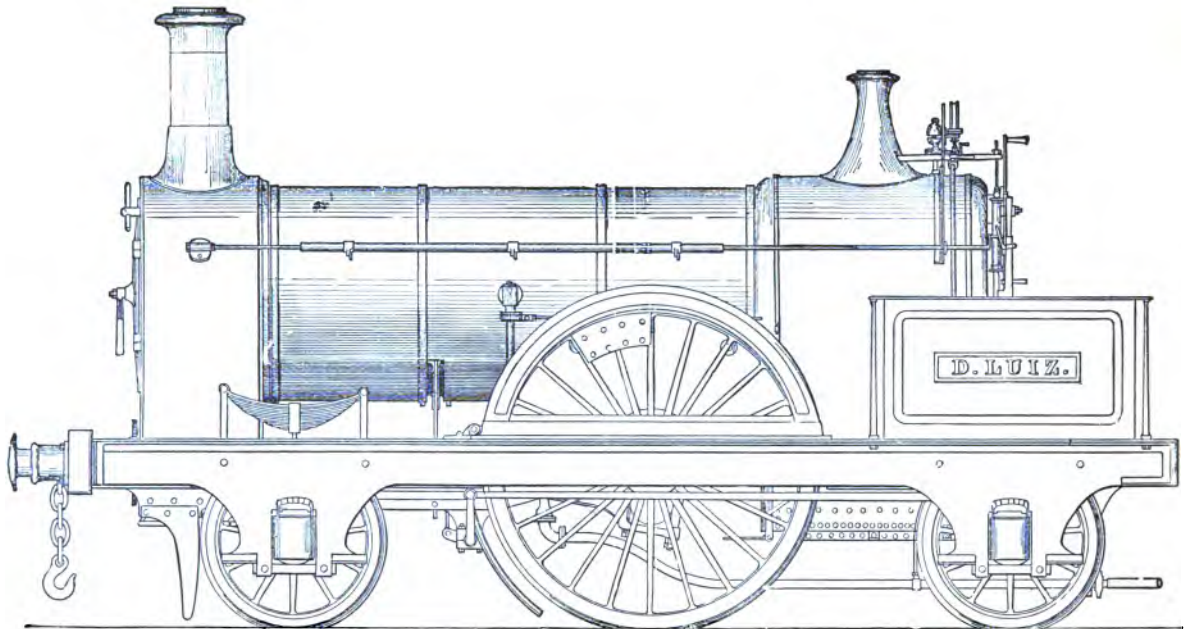

Fig. 60.—Express Passenger Locomotive, constructed by Messrs Beyer, Peacock & Co.

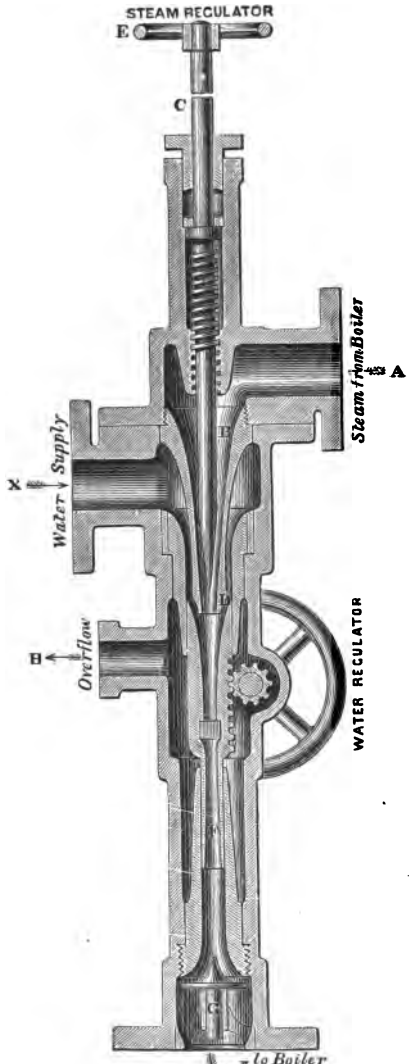

Fig. 1.—Injector.

APPENDIX.

CONTINUOUS BRAKES.

PUBLIC opinion is so far matured on the question of the braking-power of trains, that it is now agreed by common consent that the power of quickly arresting the motion of a train is just as needful as the power of quickly setting it in motion. The recommendation of the Railway Accidents Commission, after having heard the best evidence on the subject, has been in favour of a continuous and automatic brake, which should act instantaneously on the application of power for stopping a train, and which should also act instantaneously on each part of a train in case it should become accidentally divided. The necessity for the instantaneous application of the maximum brake-pressure throughout the train is so evident, that it is only necessary to recollect that at a speed which is not infrequently attained—60 miles per hour—a train passes over 88 feet in a second of time.

To stop a train in the shortest possible distance, it is necessary, in the words of Sir Douglas Galton:—1st, that the brake-blocks should act upon every wheel in the train; 2nd, that they should be applied with their full force in the least possible time; 3rd, that the

pressure upon them should be regulated according to speed and other circumstances, so that the friction shall nearly equal, but never exceed, the adhesion of the wheels upon the rails.

A consensus of opinion has not yet been attained as to which is the best of the several brakes now at work on English railways. Unless different railway companies can arrive at a joint understanding to initiate and prosecute experiments for ascertaining the performances of railway brakes, the only means by which an independent inquiry could be made would consist of a Government Commission, appointed to lay down principles and to announce the facts.

Meantime, the following account of the Westinghouse brake, one of the most prominent continuous brakes now in operation, will afford a large amount of useful information.

THE WESTINGHOUSE AUTOMATIC AND CONTINUOUS BRAKE.

THE "ordinary" Westinghouse brake is applied by discharging air through the driver's valve, and is intended for trains of say twenty or twenty-five carriages; but to make the brake available for trains of twice that length an improved arrangement has been introduced, known as the "quick-acting" brake, specially designed for use upon long trains.

The principle of the new arrangement, of which particulars will be given presently, is that, instead of the air in the main pipe being discharged and wasted, it is in emergency applications turned into the brake cylinders, thus saving both "air" and "time;" and by its use the brakes on a train of fifty vehicles can be applied in less than two seconds.

The brake is worked by compressed air, which is pumped into a large wrought-iron reservoir on the engine, generally fixed under the foot-plate. When the engine is attached to the train, the hose-couplings are united between consecutive vehicles, and all the cocks in the main pipe are open, except the cock at the rear of the train. The compressed air is turned into the main pipe, and the pressure is equal throughout the apparatus—the brake-pipe, triple-valve, and small reservoir on each vehicle; but the slide in the triple-valve being lifted up over the port leading to the brake-cylinder, the air cannot enter *there*, and hence, of course, the brake-blocks are suspended away

from the wheels. When the driver perceives danger, or requires to stop, it may be as quickly as possible, he, by turning a valve on the engine foot-plate, lets some of the air out of the main pipe; this causes the slides of the triple-valves to drop, and uncover the port leading to the brake-cylinder. The compressed air in the auxiliary reservoirs then rushes along the connecting-pipes with great rapidity, enters the brake-cylinders, and forces the pistons apart. By this movement the blocks are brought into contact with the wheels. The brake should only be used with its full force in cases of emergency. In ordinary working, the driver should put it on gently, and in such a way as will only reduce the pressure in the brake-pipe a few pounds, say from 5 lbs. to 8 lbs. per square inch. The brake is fully set when the pressure in the brake-pipe is reduced by 25 lbs. No further escape of air being required, the driver should shut the valve.

For taking the brake off.—In releasing the brake, the driver moves the handle, by which he works the brake, to the left, against the stop, and keeps it there for about five seconds, when he moves the handle back just far enough to close the direct communication between the main reservoir and the brake-pipe.

Uncoupling.—Before detaching the engine, except when the train is standing on an incline, the brake must be fully released on the whole train—that is, the main pipe and small reservoir must be charged with air.

The brake-pipe, or main pipe, has a tap at each end of each vehicle—tender, carriage, van, horse-box, carriage-truck, or other kind fitted with this brake. The taps must in all instances be closed before the

hose-coupling is disconnected, because if this precaution be neglected when uncoupling, the brakes will be applied; but, should it be desired to apply the brake to prevent the train from moving, one of the end taps may be opened to allow air to escape from the pipe.

Train separated by accident.—If the brakes be accidentally applied, they can be released by opening the release-valves attached to the brake-cylinders, or pipes leading thereto. These valves close automatically when the chain or wire by which they are held open is released. In a case of breaking away when running, the engine has simply to be connected again, when the driver will charge the brake-pipe, which lifts the triple-valve slide, and thus lets the air out of the cylinder into the atmosphere, as will be clearly illustrated farther on.

Casualties.—Should a pipe burst or get injured, the brake of any vehicle can be put out of operation without affecting the others, by closing a tap between the brake-pipe and the triple-valve.

DESCRIPTION OF BRAKE ON ENGINE AND CARRIAGE.

The locomotive, Figs. 62, 63, is provided with a donkey-engine A, and a double-acting air-pump B, with suitable valves, which are attached to the side of the boiler from which the engine is supplied with steam. Air is forced into a wrought-iron cylindrical reservoir C, attached to the lower face of the foot-plate. The pressure of air is considerable, namely, from 90 to 100 lbs. per square inch, and it is held in reserve for working

the brakes on each vehicle when the train is about to stop at a station, or in case of danger. A gauge, a^3, shows the pressure of air in the brake-pipe. A steam regulator, *a*, governs the flow of steam to the donkey-engine, and regulates its speed, and consequently also the pressure of air in the main reservoir. The exhaust

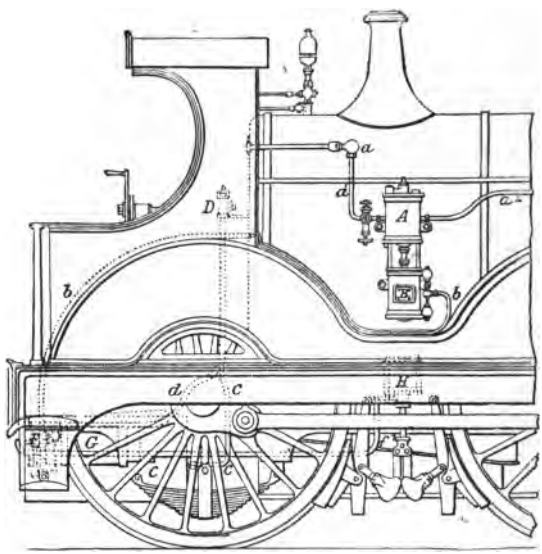

Fig. 62.—Engine: Side View.

[The cams controlling the brake should be shown in the reverse position, so as to *force down* instead of *pull up*. Pull cylinders are not now used (1894).]

pipe a^3 leads to the smoke-box. A driver's brake-valve D, has one connection, *c*, to the main reservoir, and a second connection, *d*, to the brake-pipe E, running the entire length of the train. This brake-valve regulates the flow of air for applying and releasing the brakes.

The driving-wheel brake-blocks are operated by one, and sometimes two, brake-cylinders, H H. From the brake-pipe E, branches *f* lead to each triple-valve F,

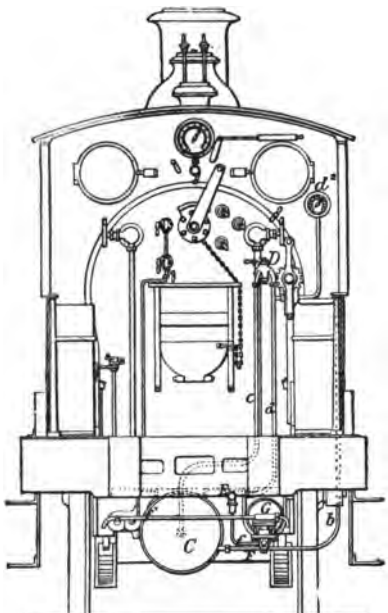

Fig. 63.—Engine: End View.

in communication with a small reservoir, G; and the pipe f^1 leads to the brake-cylinders H. Cocks, h^1, serve to close the branch-pipes *f* if required.

When air is admitted from the main reservoir on the engine into the brake-pipe E (Fig. 64), it passes into and through the triple-valves F, charging the reservoirs G with a pressure equal to that in the brake-pipe E. So long as the pressure in the brake-pipe is equal to or exceeds that in the small reservoirs, the

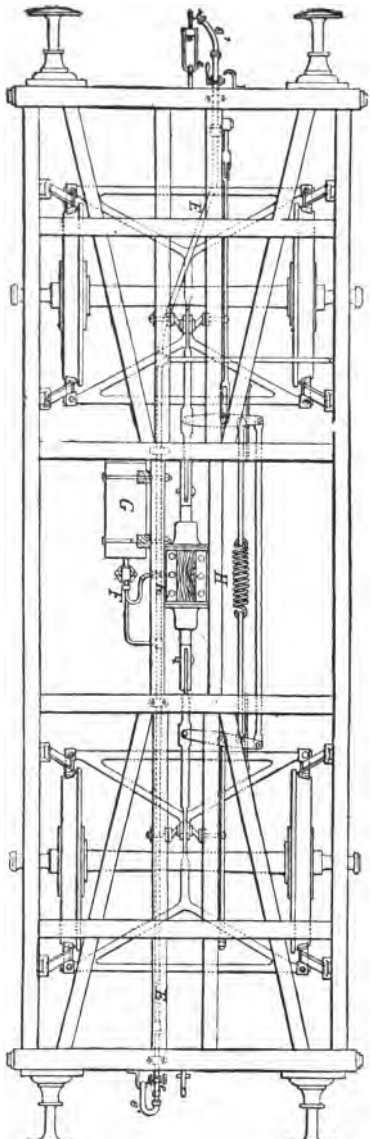

g. 64.—Carriage : Plan of Under Frame, with Westinghouse Brake

passages from the triple-valves to the brake-cylinders H are closed. The pressure supports the slide of the triple-valve over the cylinder port, and this keeps, at the same time, a passage open from the cylinder to the atmosphere, and the brakes are off.

The stop-cock *h*, placed between the triple-valves and the brake-pipe, permits the brake of any one carriage, if necessary, to be put out of use, without affecting the brakes on the other carriages. The stop-cocks *e* are placed in the brake-pipe at the end of each vehicle, in order to close the brake-pipe at the rear of the train, and to prevent the escape of air when uncoupling.

The connections between carriages are made with flexible tubing, e^1, of one inch in diameter.

DESCRIPTION OF AIR-PUMP, FIG. 65 (PLATE I.).

The pump consists of a steam cylinder A, and an air cylinder B, joined together by a centre piece. The main steam piston 3, and air piston 7, are both fastened to the same rod, and move together as one piece.

By suitably arranged valves the steam driving the pump, taken from the boiler of the locomotive, is alternately introduced into the cylinder A, above and below the steam piston 3, thus forcing this piston upwards and downwards, and giving a similar movement to the air piston 7, by which air from the outside atmosphere is then alternately drawn into the lower cylinder B, and forced therefrom into the main reservoir C.

When the steam cock P is opened, the steam from the boiler enters the chamber *c*, between the two

pistons of the main valve 1, and also flows through a small port into the chamber *d*, in the centre of the top cover, so that both chambers always contain steam of the same pressure. The ports at each end of the cylinder are opened for the admission and exhaust of steam by the movements of the main valve 1, which is so arranged that on admitting steam from the chamber *c* to one end of the cylinder A it opens the exhaust port at the other end, from which the steam then escapes through the exhaust chamber *i* into the atmosphere. The main valve 1 consists of two pistons, mounted on the opposite ends of the same rod. The upper of the two pistons being of greater diameter than the lower, the tendency of the steam pressure in the chamber *c* is always to raise the valve 1, which, however, is held down by the larger piston 2 above it, so long as steam from chamber *d* can pass through the port *e* and exert pressure upon that piston.

In the position of the main valve 1 in the illustration, steam is entering the cylinder A, past the lower piston 1, and forcing up the steam piston 3. Towards the end of this stroke the plate 4, screwed to the steam piston, presses against the shoulder of the rod 5, and raises the rod with the slide valve 6, thus closing the passage *e* in the top cover and connecting the exhaust passages *f* and *g*, through which the steam from the top of the piston 2 escapes. This relieves the pressure on the piston 2, and permits the steam in the chamber *c* to raise the main valve 1 and enter the cylinder A above the main piston 3. The latter is consequently forced downwards, whilst the steam from the lower end of the cylinder escapes through the exhaust port, opened by the lower piston of main valve 1.

PLATE I.

...C OR VANS.

...are used for Vans only.)

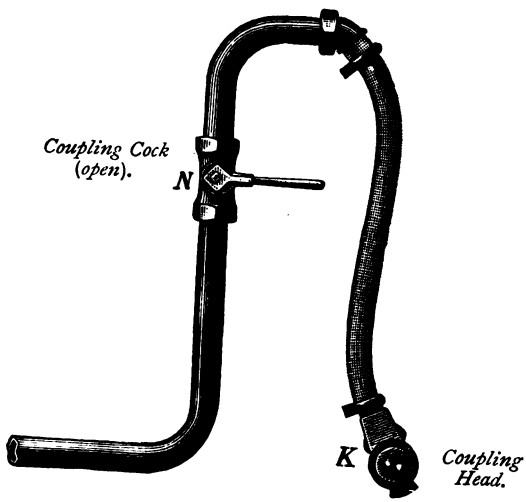

...oir.

Brake Cylinder.

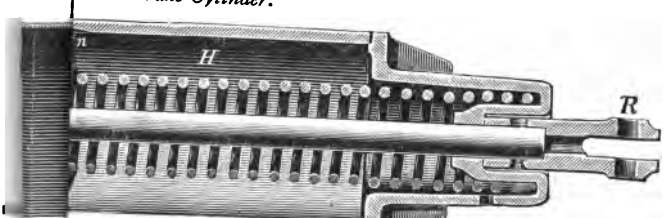

When the main piston has nearly completed its downward stroke, the plate 4 presses against the button at the end of rod 5, and draws the latter with the slide valve 6 back into the position shown. The steam in the chamber *d* then flows through the passage *e*, forcing down the piston 2, and with it the main valve 1, thus again reversing the stroke of the main piston.

The air piston 7 moves in exactly the same manner as the steam piston 3. At each upward stroke the former draws air from the outside atmosphere through the lower receiving valve *a* into the bottom part of the cylinder B, and delivers at the same time the air from the top part of this cylinder through the upper discharge valve *b* into the main reservoir C. At each downward stroke of the piston 7 this action is simply reversed, air being drawn in through the upper receiving valve *a*, and simultaneously discharged from the opposite end of the cylinder through the lower discharge valve *b* into the main reservoir C.

DESCRIPTION OF BRAKE-CYLINDER.

A brake-cylinder H, Fig. 66 (Plate 1.), is fitted to every locomotive, tender, and brake vehicle.

The cylinder of the standard quick-acting brake apparatus is shown in section in the plate, but several other patterns of brake-cylinders are sometimes used to suit the various constructions of the rolling stock to which they are applied. Although these cylinders differ in size and form, they are all identical in their working and general arrangement.

Each brake-cylinder contains a piston, having its rod attached to the brake-gear in such a manner that

the brake-blocks are pressed against the wheels when the piston is forced out by air pressure.

As long as the brake is not applied, the cylinder is free from air pressure, and the piston is in the position shown in the illustration. When, however, the brake is put into operation, compressed air is admitted to the cylinder by the corresponding triple-valve. The air pressure, acting upon the left hand side of the brake-piston, forces the latter forward, thus applying the brake-blocks to the wheels. Upon the air being allowed to escape from the cylinder, the spring (which had been compressed in applying the brake) extends and returns the piston and brake-gear to their original positions, thereby releasing the blocks from the wheels.

To prevent the application of the brake from slight leakage in the main pipe, each brake-cylinder is provided with a small groove *n*, which establishes a communication between both sides of the piston when the brake is not applied. If on account of such leakage a slight flow of air to the brake-cylinder should occur, the air would pass through the groove *n* to the atmosphere without moving the piston. When, however, a considerable quantity of air is suddenly admitted to the cylinder, as in an ordinary application of the brake, the piston is immediately forced past the groove, and an escape of air from the cylinder prevented.

DESCRIPTION OF DRIVER'S BRAKE-VALVE, FIG. 67.

Air passes from the main reservoir into the chamber A, in which is the rotating valve 4, seated upwards by means of a spring 8. When the handle is in the proper position for filling the brake-pipe, the air passes

through a port in the valve 4 into the chamber B and the brake-pipe, the discharge-valve 3 being held to its seat by means of the spring 7. The spring 7 is held down by the handle 2, the rotary motion of which regulates the amount of pressure upon the spring by the coarse screw. The valve 3 and rotating valve 4 turn with the handle 2. When the handle 2 is in its ordinary position during running, a passage of $\frac{1}{8}$ inch in diameter is open between the chamber C, in which is seated the small valve 6, and the chamber B, this

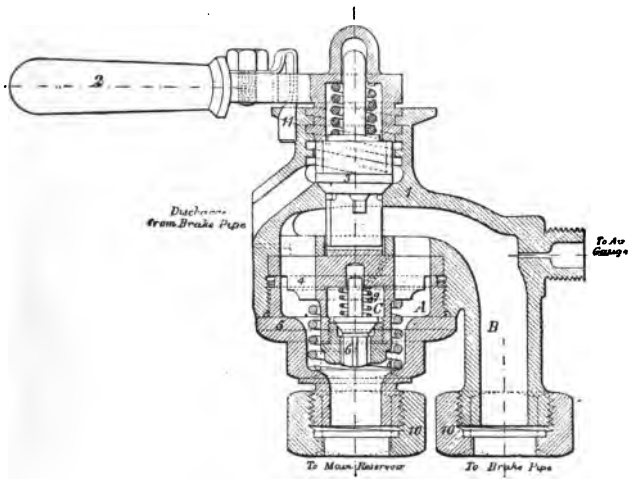

Fig. 67.—The Driver's Brake-Valve.

opening being for the purpose of maintaining the pressure in the brake-pipe. The spring 9, which holds this valve to its seat, has a pressure of about fifteen pounds, so that the pressure in the main reservoir must always exceed that in the brake-pipe by at least fifteen pounds. When the excess becomes greater than that amount, additional air passes into the

brake-pipe until the spring is again able to close the valve 6.

To apply the brake, the handle 2 is turned to the right. This relieves the pressure upon the spring 7 and allows the discharge-valve 3 to be raised from its seat by the pressure of air in the chamber B, thus discharging the air from the brake-pipe and applying the brake. At the same time the valve 4 rotates with the handle, and this motion closes all communication between the chamber A and the chamber B.

If the handle 2 is turned to its farthest position to the right, the valve 3 gives a full opening to the discharge of air from the brake-pipe, and the brakes are applied immediately with full force, as in cases of emergency.

To release the brake, the handle 2 is turned to the farthest position to the left. This closes the discharge-valve 3 by compressing the spring 7, and at the same time causes the valve 4 to turn to a position in which there is a free opening between the chamber A and the chamber B. This allows the brake-pipe to be recharged from the air in the main reservoir, and the brakes to be released. As soon as the brake-pipe is recharged the handle 2 is turned slightly to the right, or its normal position, closing the full opening between the chambers A and B, but leaving open the $\frac{1}{8}$-inch passage from the chamber C to the chamber B.

The object of allowing any excess of pressure created in the main reservoir to pass into the brake-pipe only through the $\frac{1}{8}$-inch passage is to provide for any gradual leakage, and at the same time to prevent the total escape of the air in the main reservoir in case of any sudden rupture of the pipe.

This valve is very simple in its operation, and admits of the most perfect graduation of the force with which the brakes are applied, irrespective of the number of vehicles in the train.

NUMBER AND NAMES OF PARTS, FIG. 67.

No. 1. Valve body.
2. Handle.
3. Discharge-valve.
4. Centre valve.
5. Lower cap.
6. Feed-valve.
7. Discharge-valve spring.
8. Centre-valve spring.
9. Feed-valve spring.
10. Union nut.
11. Handle spring.

DESCRIPTION OF QUICK-ACTING TRIPLE-VALVE.

The quick-acting triple-valve, shown in this illustration, forms the essential part of the quick-acting brake apparatus. By the variations of pressure in the main pipe, it automatically admits compressed air to the brake-cylinders, or discharges it from the brake-cylinders as the air pressure in the main pipe is reduced or restored to its original force.

The device, it will be seen, consists of two piston valves, one working horizontally and the other vertically, the horizontal valve being similar to the "ordinary" Westinghouse triple-valve.

In ordinary applications of the brake, only the horizontal main piston valve operates, admitting air from the auxiliary reservoir into the brake-cylinder,

whilst the secondary piston 13, and the check valve 18, remain at rest. When, however, on a sudden reduction of the pressure in the main pipe, the piston 5 and its slide-valve 6 are brought to their extreme position towards the right, compressed air is admitted to the upper side of the secondary piston 13, which, being driven down, opens the check-valve 18, thus admitting compressed air from the main pipe to the brake-cylinder, which at the same time is also charged with compressed air, admitted by the slide-valve 6 from the auxiliary reservoir. This discharge of air from the main pipe into the brake-cylinders has the effect of reducing the pressure in the main pipe with great rapidity, which causes a practically simultaneous action of the brakes, even on the longest goods trains.

The construction and action of the quick-acting triple-valve may be fully described as follows :—

Enclosed in a case 1 is a piston 5, carrying with it a slide-valve 6, which covers the ports *a*, *c* and *h*, in the valve-case 1.

When compressed air is allowed to flow from the main reservoir through the driver's brake-valve to the main pipe, it enters the triple-valve on each vehicle at E, flows through the passages K and *l*, forces the piston 5 with the slide-valve 6 to the position shown, and feeds past the grooves *d* and *f* into the auxiliary reservoir connected to C, which is thus charged with an air pressure of about 70 lbs. per square inch. In this position of the piston 5 the brake-cylinder is closed to the compressed air in the auxiliary reservoir by the slide-valve 6, and to the air in the main pipe by a check-valve 18, which is held to its seat by the pressure

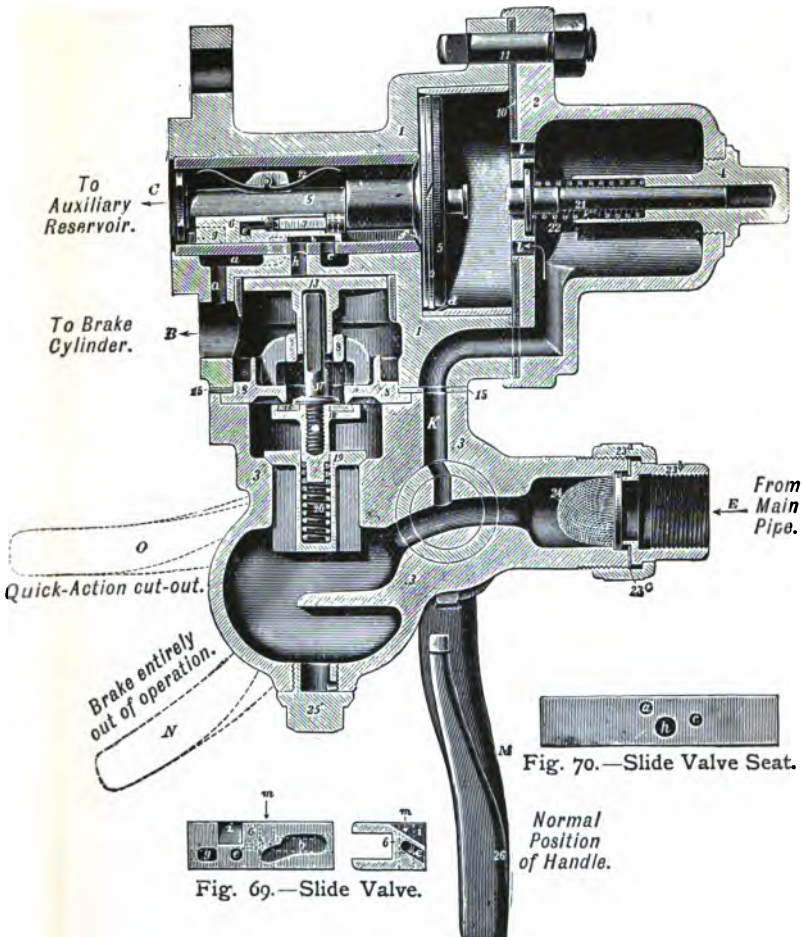

Fig. 68.—Quick-Acting Triple Valve.

in the pipe. The same pressure now exists on both sides of the piston 5, and the brake is released; the brake-cylinder being in connection with the atmosphere through the passages B and *a*, the cavity *b* in the slide-valve, and the exhaust port *c*.

When the brakes are to be moderately applied, as in ordinary stops, the "quick-acting" triple-valve operates in exactly the same way as the "ordinary" triple-valve, as follows:—Upon a slight reduction of pressure in the main pipe, the piston 5, owing to the excess of pressure in the auxiliary reservoir, will move towards the right, thereby closing the feed-groove *d*, and at the same time unseating the graduating valve 7, which thus admits air through a side aperture *m* (Fig. 69) to the passage *e*. The piston 5 then takes with it the slide-valve 6, thus closing the communication from the brake-cylinder to the atmosphere, and opening the passage *e* of the slide-valve to the port *a* leading to the brake-cylinder, into which compressed air from the auxiliary reservoir immediately flows and applies the brake.

The further movement of the piston 5 and slide-valve 6 is arrested by the decrease of pressure on the left side of the piston, caused by the discharge of air from the reservoir into the brake-cylinder. So soon as the pressure in the reservoir is thus reduced a little below that in the main pipe, the piston 5 moves slightly back to the left, and closes the graduating valve 7, while the slide-valve 6 retains its position.

By simply regulating the reduction of pressure in the main pipe, the driver can gradually introduce any desired pressure into the brake-cylinder, from zero up to full power. When, however, it is necessary to

apply the brakes quickly and with full force, a rapid and considerable reduction of pressure is made in the main pipe, which causes the triple-valve piston 5 and its slide-valve 6 to move to the limit of the stroke, the piston seating itself on the leather 10, and air from the auxiliary reservoir is admitted through the passage *h* to the secondary piston 13, which is thus moved down, forcing the valve 18 off its seat. The air pressure in the main pipe then lifts the check-valve 19, and flows through the open valve 18 and passage B, into the brake-cylinder. The result is the application of the brakes to all vehicles of a train with extraordinary rapidity, and practically simultaneous action, throughout trains of almost any length.

In order to release the brakes, compressed air from the main reservoir is admitted by means of the driver's valve into the main pipe, whence it enters the triple-valve by the passages K and *l*, and forces piston 5 and slide-valve 6 to their original position. In the course of this movement the exhaust cavity *b* of the slide-valve first connects the passage *h* to the exhaust port *c*, relieving the pressure from the top side of the piston 13, which is returned to the position shown in Fig. 68 by the air pressure in the brake-cylinder, whilst the spring 20 closes the valve 18. As the slide-valve 6 completes its leftward movement, the cavity *b* also opens the passage *a* to the exhaust port *c*, which discharges the air from the brake-cylinder and releases the brakes. The auxiliary reservoir is again charged, through grooves *d* and *f*. A wire-gauze strainer 24 is inserted to prevent dirt or grit entering the valve.

To secure the simultaneous release of the brakes, a nipple, having an aperture corresponding to the size of

the brake-cylinder with which it is used, is inserted in the mouth of the exhaust port of the triple-valve.

DESCRIPTION OF DOUBLE-PISTON BRAKE-CYLINDER.

When compressed air is admitted to the cylinder at A (Fig. 71), the two pistons, 4, 4, are thrust outwards with equal force, and the blocks are thus pressed against the wheels.

When the air is allowed to exhaust into the atmosphere through the exhaust port *b*, in the triple-valve, the springs 8 push back the pistons and release the brake-blocks from the wheels.

NUMBER AND NAMES OF PARTS, FIG. 71.

No. 1. Cylinder body.
2. Cylinder head.
3. Piston-rod crosshead.
4. Piston and rod.
5. Piston follower.
6. Piston packing-leather.
7. Piston packing-expander.
8. Piston release-spring.

MAIN PIPE AND HOSE COUPLINGS.

The main pipe E (Figs. 65 and 66) extends from the driver's brake-valve D to both ends of the train, communicating by branch pipes with the brake apparatus on the engine, tender, and each vehicle. For ordinary passenger trains the main pipe is of one inch internal diameter, but on vehicles intended to run in goods and other trains of great length the diameter is increased to $1\frac{1}{4}$ inch.

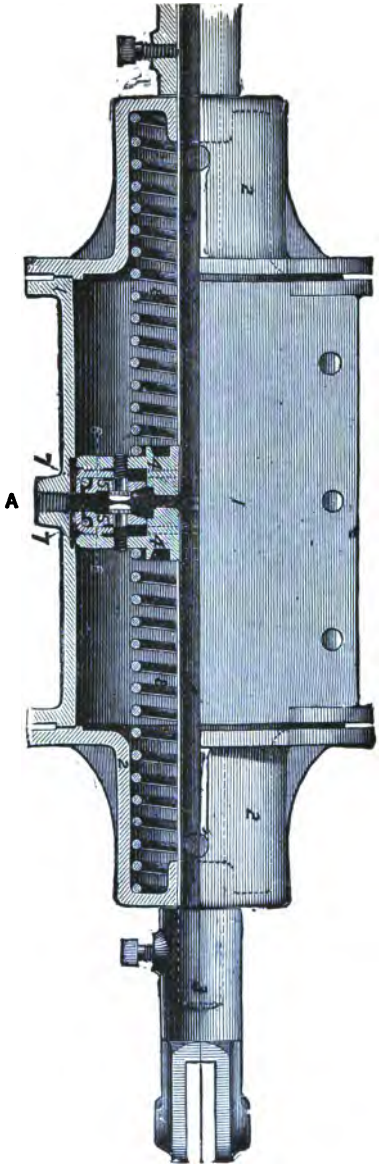

Fig. 71.—8-inch Double-Piston Brake-Cylinder.

Air-tight connections of the main pipe are made between the vehicles by flexible rubber hose, attached to the iron pipes, and fitted with metallic coupling heads K (Fig. 66), arranged so as to be readily coupled or uncoupled.

The couplings between two vehicles are united by placing their heads face to face nearly at right angles,

Fig. 72.—Position of Coupling Heads before being united.

as represented in Fig. 72, and then turning the projecting piece of the one into the corresponding groove of the other.

The two coupling heads are exactly alike, each being provided with a rubber packing ring, so arranged that whenever two couplings are united these rings face against each other. The air pressure in the main pipe tends to force the rings together, thus forming an air-tight joint, which becomes tighter with increase of pressure.

If the couplings be forcibly drawn apart by a separation of the train, the brakes are applied with full force, but no damage is done to the couplings, as the rubber rings are pressed back into their respective

cases sufficiently far to permit the projecting pieces to disengage from their grooves.

The main pipe of every vehicle is also provided at either end with a stop-cock N (Fig. 66), located near the connection with the hose coupling. These cocks are for the purpose of retaining the air pressure, stored in the brake apparatus of the vehicles, while they are temporarily detached from a train.

ARRANGEMENT OF THE BRAKE APPARATUS ON LOCOMOTIVES, TENDERS, AND VEHICLES.

The application of the quick-acting Westinghouse brake to rolling stock is illustrated in Plate II. (Figs. 73, 74).

The locomotive is provided with a vertical double acting air pump, having a steam cylinder A, and an air cylinder B, with the usual valves and pistons. The pump is driven by steam, which is taken from the locomotive boiler and exhausted, after having done its work, through the pipe *i* into the smoke-box. To regulate the flow of steam to the pump, and consequently to govern the work of the latter at the will of the driver, a steam-cock P is so arranged that it can be opened or closed from the driver's cab. When the steam-cock P is open the pump will work, and force air through the delivery pipe *b* into the main reservoir C, usually fastened beneath the foot-plate. A separate pipe *c* leads from the top part of the main reservoir C to the driver's brake-valve D, placed in the cab of the engine, within easy reach of the driver. This valve is also connected to the main brake-pipe E, which extends the whole length of the train, communicating

with the brake apparatus on each vehicle through a branch pipe *e*. Air-tight connections of the main pipe E between the vehicles of the train are formed by flexible rubber hose fitted with iron coupling heads K, so designed that they may readily be coupled or uncoupled. Stop-cocks N are placed in the main pipe at either end of each vehicle, in order to close the pipe at the ends of the train, and to prevent the action of the brake when vehicles are detached. These cocks must be opened whenever the corresponding couplings K are united, and shut before the couplings are separated. On tenders and tank engines a drip cup *t* is placed in the main pipe E, to catch any water or oil which might otherwise pass into the apparatus on the carriages. A duplex gauge L (or two ordinary gauges, as shown on Plate I.) is attached to the driver's brake-valve on the engine to indicate the pressure of air carried in the main reservoir C, and in the main pipe E.

Besides the parts already mentioned, the engine, tender, and braked vehicles are each provided with an apparatus which actually applies the brake force to the wheels, by means of levers and rods directly attached to it. The essential parts of this apparatus are:—

A brake-cylinder H, containing a piston with rod, attached to the brake-gear in such a manner that the brakes are applied when the piston is forced out by air pressure;

An auxiliary reservoir G, in which air, supplied from the main reservoir through the main pipe, is stored for applying the brake on its own vehicle;

A triple-valve F, which automatically admits compressed air from the auxiliary reservoir G to the brake-

PLATE II.

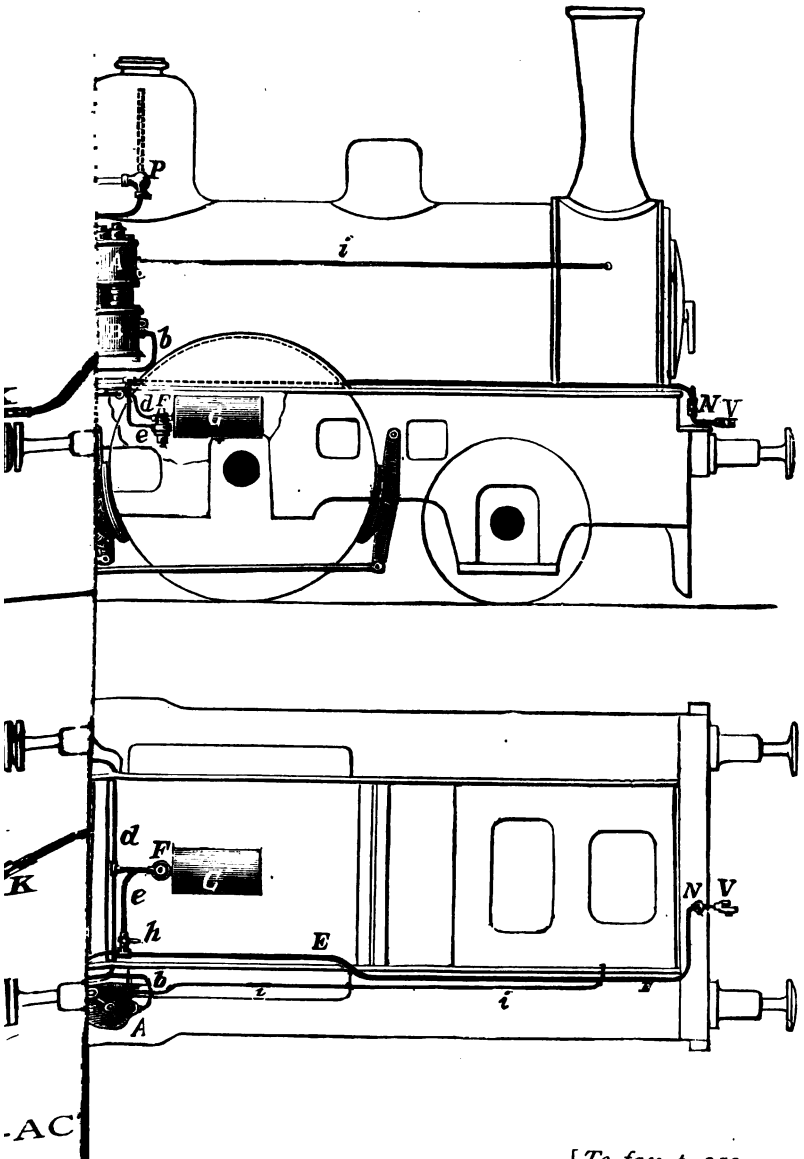

[To face p. 252.

cylinder H whenever the pressure in the main pipe is reduced, and discharges the pressure from the brake-cylinder into the atmosphere when the original air pressure in the main pipe is restored.

The parts just mentioned are either combined in one piece, as applied to the carriage represented on Plate II.; or they are arranged separately, and connected by tubes, as shown on the tender. On locomotives the separate arrangement is always employed.

A release valve J is attached to the auxiliary reservoir G, and serves the purpose of releasing the corresponding brake by hand, if necessary. On locomotives and tenders these valves are fixed in the cab, within easy reach of the driver; on carriages they are so arranged that they can readily be opened from either side of the vehicle by pulling a light wire connected to the valve handle. The branch pipes *e*, leading to the triple-valves F, are each connected to the main pipe E by means of a dust-catcher W, which contains a tube of wire gauze to arrest any dirt or grit which might find its way into the pipe.

Each van is provided with a gauge indicating the air pressure in the main pipe; also with a cock, connected to the main pipe, by means of which the guard can stop the train, if necessary, even against the will of the driver.

CONCLUDING REMARKS.

It may be added, in conclusion, that the performance of the Westinghouse brake was very fully and ably investigated by Captain (now Sir Douglas) Galton, in a long course of experiments conducted on the London, Brighton, and South Coast Railway, the results of which were embodied by him in three papers read before the Institution of Mechanical Engineers, in June and October 1878, and in April 1879.

The reader who is desirous of informing himself of the working of the Westinghouse brake, cannot do better than study those elaborate and valuable papers, bearing in mind, however, that since they were written important improvements (in particular the "quick-acting" triple-valve) have been introduced in the construction of the apparatus.

INDEX.

ACCIDENTS, railway, report of commission on, 231
Adhesion, 194
Admission of steam into the cylinder, 182
Air and water, 204
Air, composition of, 204; pressure of air, 204, 206; its effects on the fittings of machinery, 206
Alloys, composition of, for axle-bearings, 201
Axle-boxes, 70; composition of bearings of, 201

BACK pressure in locomotives, 190
Bar-boy, 127
Bearings of axle-boxes, composition of, 201
Blast, action of, in the chimney, 169
Blenkinsop's locomotive, 49
Bodies, common properties of, 194
Boiler of the locomotive, 166; expansion of, by heat, 202
Boiler-mounting, 167
Brake, the Westinghouse automatic and continuous, 229
Brakes on tramways, 31
Brakes, continuous, 229; qualifications of an efficient brake, 229; legislation on continuous brakes, 229; Sir Douglas Galton's experiments on continuous brakes, 254
Breaking-down of an engine, 175
Brunton's locomotive, 53

CARBON, combustion of, 177; its imperfect combustion the cause of smoke, 177
Certificates; third-class engine boy's, 137; second-class engine boy's, 139; first-class engine-boy's, 140; third-class fireman's certificate, 147; second-class fireman's certificate, 155; first-class fireman's certificate, 156; third-class engineer's certificate, 163; second-class engineer's certificate, 172; first-class engineer's certificate, 192
Chapman's locomotive, 51
Cleaner, fireman, 130
Coal, bituminous, 180
Coal, Welsh, the best for locomotives, 179
Coal and steam, 179, 180
Cohesion, 195
Combustion, 176; smoke, 177
Compressibility, 195
Conservatoire des Arts et Métiers, straightening the walls of, 198

Contraction, 203; contraction of tyres of wheels, 203; contraction of water, 203
Coupling-rods, breaking of, 176
Crank-axle, 168
Cugnot's locomotive, 23
Cylinder, steam in, action of, 161, 182

DENSITY, 198; standard of density, 199
Dilatation, 197
Drawing, mechanical, 211; problems, 212; side elevation of a steam-engine, 219

ELASTICITY, 196
Engine-boy, 126; third-class certificate, 137; second-class certificate, 139; first-class certificate, 140
Engineer, 158; third-class certificate, 163; second-class certificate, 172; first-class certificate, 192
Examinations, searching nature of, 163
Excentrics and straps, 168
Exhaustion, action of steam in the cylinder during, 188
Expansion and contraction, 201
Expansion of bodies by heat, 201; damaged fire-boxes, 202; expansion of boilers, 202; expansion of elastic fluids, 202; expansion of water, 203
Expansion of steam in the cylinder, 185
Expansion-brackets for locomotive boilers, 202
Expansion-links, 169

FAILURES, investigation of, 175
Feed-pumps of locomotives, 170
Feed-pipes of locomotives, freezing of water in, 203
Fires, management of, in a locomotive, 174, 179
Fire, making up, 149
Fire, how to, 157
Fire, the condition of the, 174; proper form of the fire, 174; efficiency of the fire, 175
Fire-box of locomotive, 166; expansion of fire-boxes by heat, 202
Fireman, 143; third-class certificate, 147; second-class certificate, 155; first-class certificate, 156
Flue-tubes of locomotives, 167
Foggy weather, 176
Framing and motion of the locomotive, 168

GALTON, Sir Douglas, on the qualifications of an efficient continuous brake, his experiments, 229, 254
Gaseous bodies, elasticity of, 196
Geometrical problems, 212
Geometry, 208

HARDNESS, 200
Hedley's locomotives, 59, 64
Hetton railway, 98

INDICATOR diagrams, 184, 187, 188, 190
Injector, 170
Inspection of an engine, 174
Iron bars, expansion of, utilisation of, for straightening the walls of the Conservatoire des Arts et Métiers, 198

LOCOMOTIVE, early history of, 20; Cugnot's engine, 23; Murdoch's engine, 24; Trevethick's engines, 37; Trevethick and Vivian's road locomotive, 38; Trevethick's railway locomotive, 43; Blenkinsop's engine, 49; Chapman's engine, 51; Brunton's engine, 53; Mr Blackett, 56; Hedley's engine, 59, 64; George Stephenson's locomotives, 83, 94; competition of engines on the Liverpool and Manchester railway, 104; the "Rocket," 106; the "Sans Pareil," 108; the "Novelty," 110
Locomotives:—Classification of, 165; boiler, 166; fire-box, 166; framing and motion, 168; feed-pumps, 170; valves, &c., 171; firing, 174
Locomotive foreman, 121
Locomotive superintendent, 118

MALLEABILITY, 200
Mechanical drawing, 211; problems, 212; side elevation of a steam engine, 219
Morin, M., straightening walls by, 198
Murdoch's locomotive, 24

NATURAL Philosophy, study of, 207
Newton's, Sir Isaac, rules for the study of Natural Philosophy, 267

OILING the engine, 149
Oxygen, the principal supporter of combustion, 177

PRIESTLEY, Dr, his experiments on the elastic force of air, 204

RAILS:—Plate-rail, 35; edge-rail, 35
Rails, steel, influence of cooling on the malleability of, 200
Railway:—Hetton railway, 98; Liverpool and Manchester railway, 102; management of a railway, 117
Railway, the management of a, 117
Railway Accidents Commission, report of. 229
Regulator, 168

SIGNALS, 165
Slide-valves, 171
Smoke, what it is, 16, 177
Smoke, 177
Smoke-box, 167
Steam, 179, 180; action in the cylinders, 161, 182
Steam, blowing back, into the tender, 180
Steel rails, influence of cooling on the malleability of, 200
Stephenson, George, 67; his first locomotive, 83; his second engine, 94; construction of the Hetton railway, 98; engineer to the Stockton and Darlington tramway, 99; Liverpool and Manchester railway, 102; his engine the "Rocket," 106; his success, 114.

TENDER-ENGINES, 166
Train, duties with a, 173
Tramways, coal, 27; accidents on tramways, 29; brakes on tramways, 31; cast-iron plate-rail,

35; cast-iron edge-rail, 35; Stockton and Darlington tramway, 99
Trevethick and his engines, 37, 43
Trevethick and Vivian's road locomotive, 38
Tyres of wheels, expansion and contraction of, by heat, 203

VALVES of locomotives, 171

WATER, its composition, 205; expansive force, 205; its incompressibility, 205; forms of water, 205; freezing of water in feed-pipes, 203; standard of density, 199
Westinghouse automatic and continuous brake, 230
Wheel-cleaning, 129
Wheel-tyres, expansion and contraction of, by heat, 203
Working of a train, irregularities of, 175

PRINTED AT THE DARIEN PRESS, EDINBURGH.

Weale's Rudimentary Series.

LONDON, 1862.

THE PRIZE MEDAL

Was awarded to the Publishers of

WEALE'S SERIES

RUDIMENTARY SCIENTIFIC, EDUCATIONAL, AND CLASSICAL.

Comprising nearly Three Hundred and Fifty distinct works in almost every department of Science, Art, and Education, recommended to the notice of Engineers, Architects, Builders, Artisans, and Students generally, as well as to those interested in Workmen's Libraries, Literary and Scientific Institutions, Colleges, Schools, Science Classes, &c., &c.

☞ "WEALE'S SERIES includes Text-Books on almost every branch of Science and Industry, comprising such subjects as Agriculture, Architecture and Building, Civil Engineering, Fine Arts, Mechanics and Mechanical Engineering, Physical and Chemical Science, and many miscellaneous Treatises. The whole are constantly undergoing revision, and new editions, brought up to the latest discoveries in scientific research, are constantly issued. The prices at which they are sold are as low as their excellence is assured."—*American Literary Gazette.*

"Amongst the literature of technical education, WEALE'S SERIES has ever enjoyed a high reputation, and the additions being made by Messrs. CROSBY LOCKWOOD & SON render the series more complete, and bring the information upon the several subjects down to the present time."—*Mining Journal.*

"It is not too much to say that no books have ever proved more popular with, or more useful to, young engineers and others than the excellent treatises comprised in WEALE'S SERIES."—*Engineer.*

"The excellence of WEALE'S SERIES is now so well appreciated, that it would be wasting our space to enlarge upon their general usefulness and value."—*Builder.*

"The volumes of WEALE'S SERIES form one of the best collections of elementary technical books in any language."—*Architect.*

"WEALE'S SERIES has become a standard as well as an unrivalled collection of treatises in all branches of art and science."—*Public Opinion.*

PHILADELPHIA, 1876.

THE PRIZE MEDAL

Was awarded to the Publishers for

Books: Rudimentary, Scientific,

"WEALE'S SERIES," ETC.

CROSBY LOCKWOOD & SON,

7, STATIONERS' HALL COURT, LUDGATE HILL, LONDON, E.C.

*** *Catalogues post free on application.*

WEALE'S RUDIMENTARY SCIENTIFIC SERIES.

*** The volumes of this Series are freely Illustrated with Woodcuts, or otherwise, where requisite. Throughout the following List it must be understood that the books are bound in limp cloth, unless otherwise stated; *but the volumes marked with a ‡ may also be had strongly bound in cloth boards for 6d. extra.*

N.B.—In ordering from this List it is recommended, as a means of facilitating business and obviating error, to quote the numbers affixed to the volumes, as well as the titles and prices.

CIVIL ENGINEERING, SURVEYING, ETC.

No.

31. *WELLS AND WELL-SINKING.* By JOHN GEO. SWINDELL, A.R.I.B.A., and G. R. BURNELL, C.E. Revised Edition. With a New Appendix on the Qualities of Water. Illustrated. 2s.

35. *THE BLASTING AND QUARRYING OF STONE,* for Building and other Purposes. By Gen. Sir J. BURGOYNE, Bart. 1s. 6d.

43. *TUBULAR, AND OTHER IRON GIRDER BRIDGES,* particularly describing the Britannia and Conway Tubular Bridges. By G. DRYSDALE DEMPSEY, C.E. Fourth Edition. 2s.

44. *FOUNDATIONS AND CONCRETE WORKS,* with Practical Remarks on Footings, Sand, Concrete, Béton, Pile-driving, Caissons, and Cofferdams, &c. By E. DOBSON. Seventh Edition. 1s. 6d.

60. *LAND AND ENGINEERING SURVEYING* By T. BAKER, C.E. Fifteenth Edition, revised by Professor J. R. YOUNG. 2s.‡

80*. *EMBANKING LANDS FROM THE SEA.* With examples and Particulars of actual Embankments, &c. By J. WIGGINS, F.G.S. 2s.

81. *WATER WORKS,* for the Supply of Cities and Towns. With a Description of the Principal Geological Formations of England as influencing Supplies of Water, &c. By S. HUGHES, C.E. New Edition. 4s.‡

118. *CIVIL ENGINEERING IN NORTH AMERICA,* a Sketch of. By DAVID STEVENSON, F.R.S.E., &c. Plates and Diagrams. 3s.

167. *IRON BRIDGES, GIRDERS, ROOFS, AND OTHER WORKS.* By FRANCIS CAMPIN, C.E. 2s. 6d.‡

197. *ROADS AND STREETS.* By H. LAW, C.E., revised and enlarged by D. K. CLARK, C.E., including pavements of Stone, Wood, Asphalte, &c. 4s. 6d.‡

203. *SANITARY WORK IN THE SMALLER TOWNS AND IN VILLAGES.* By C. SLAGG, A.M.I.C.E. Revised Edition. 3s.‡

212. *GAS-WORKS, THEIR CONSTRUCTION AND ARRANGEMENT;* and the Manufacture and Distribution of Coal Gas. Originally written by SAMUEL HUGHES, C.E. Re-written and enlarged by WILLIAM RICHARDS, C.E. Eighth Edition, with important additions. 5s. 6d.‡

213. *PIONEER ENGINEERING.* A Treatise on the Engineering Operations connected with the Settlement of Waste Lands in New Countries. By EDWARD DOBSON, Assoc. Inst. C.E. 4s. 6d.‡

216. *MATERIALS AND CONSTRUCTION;* A Theoretical and Practical Treatise on the Strains, Designing, and Erection of Works of Construction. By FRANCIS CAMPIN, C.E. Second Edition, revised. 3s.‡

219. *CIVIL ENGINEERING.* By HENRY LAW, M.Inst. C.E. Including HYDRAULIC ENGINEERING by GEO. R. BURNELL, M.Inst. C.E. Seventh Edition, revised, with large additions by D. KINNEAR CLARK, M.Inst. C.E. 6s. 6d., Cloth boards, 7s. 6d.

268. *THE DRAINAGE OF LANDS, TOWNS, & BUILDINGS.* By G. D. DEMPSEY, C.E. Revised, with large Additions on Recent Practice in Drainage Engineering, by D. KINNEAR CLARK, M I C.E. Second Edition, Corrected. 4s. 6d.‡

☞ *The ‡ indicates that these vols. may be had strongly bound at 6d. extra.*

MECHANICAL ENGINEERING, ETC.

33. *CRANES*, the Construction of, and other Machinery for Raising Heavy Bodies. By JOSEPH GLYNN, F.R.S. Illustrated. 1s. 6d.
34. *THE STEAM ENGINE*. By Dr. LARDNER. Illustrated. 1s. 6d.
59. *STEAM BOILERS:* their Construction and Management. By R. ARMSTRONG, C.E. Illustrated. 1s. 6d.
82. *THE POWER OF WATER*, as applied to drive Flour Mills, and to give motion to Turbines, &c. By JOSEPH GLYNN, F.R.S. 2s.‡
98. *PRACTICAL MECHANISM*, the Elements of; and Machine Tools. By T. BAKER, C.E. With Additions by J. NASMYTH, C.E. 2s. 6d.‡
139. *THE STEAM ENGINE*, a Treatise on the Mathematical Theory of, with Rules and Examples for Practical Men. By T. BAKER, C.E. 1s. 6d.
164. *MODERN WORKSHOP PRACTICE*, as applied to Steam Engines, Bridges, Ship-building, &c. By J. G. WINTON. New Edition. 3s. 6d.‡
165. *IRON AND HEAT*, exhibiting the Principles concerned in the Construction of Iron Beams, Pillars, and Girders. By J. ARMOUR. 2s. 6d.‡
166. *POWER IN MOTION:* Horse-Power, Toothed-Wheel Gearing, Long and Short Driving Bands, and Angular Forces. By J. ARMOUR. 2s.‡
171. *THE WORKMAN'S MANUAL OF ENGINEERING DRAWING*. By J. MAXTON. 7th Edn. With 7 Plates and 350 Cuts. 3s. 6d.‡
190. *STEAM AND THE STEAM ENGINE*, Stationary and Portable. By J. SEWELL and D. K. CLARK, C.E. 3s. 6d.‡
200. *FUEL*, its Combustion and Economy. By C. W. WILLIAMS. With Recent Practice in the Combustion and Economy of Fuel—Coal, Coke, Wood, Peat, Petroleum, &c.—by D. K. CLARK, M.I.C.E. 3s. 6d.‡
202. *LOCOMOTIVE ENGINES*. By G. D. DEMPSEY, C.E.; with large additions by D. KINNEAR CLARK, M.I.C.E. 3s.‡
211. *THE BOILERMAKER'S ASSISTANT* in Drawing, Templating, and Calculating Boiler and Tank Work. By JOHN COURTNEY, Practical Boiler Maker. Edited by D. K. CLARK, C.E. 100 Illustrations. 2s.
217. *SEWING MACHINERY:* Its Construction, History, &c., with full Technical Directions for Adjusting, &c. By J. W. URQUHART, C.E. 2s.‡
223. *MECHANICAL ENGINEERING*. Comprising Metallurgy, Moulding, Casting, Forging, Tools, Workshop Machinery, Manufacture of the Steam Engine, &c. By FRANCIS CAMPIN, C.E. Second Edition. 2s. 6d.‡
236. *DETAILS OF MACHINERY*. Comprising Instructions for the Execution of various Works in Iron. By FRANCIS CAMPIN, C.E. 3s.‡
237. *THE SMITHY AND FORGE;* including the Farrier's Art and Coach Smithing. By W. J. E. CRANE. Illustrated. 2s. 6d.‡
238. *THE SHEET-METAL WORKER'S GUIDE;* a Practical Handbook for Tinsmiths, Coppersmiths, Zincworkers, &c. With 94 Diagrams and Working Patterns. By W. J. E. CRANE. Third Edition, revised. 1s. 6d.
251. *STEAM AND MACHINERY MANAGEMENT:* with Hints on Construction and Selection. By M. POWIS BALE, M.I.M.E. 2s. 6d.‡
254. *THE BOILERMAKER'S READY-RECKONER*. By J. COURTNEY. Edited by D. K. CLARK, C.E. 4s.

*** *Nos.* 211 *and* 254 *in One Vol., half-bound, entitled* "THE BOILERMAKER'S READY-RECKONER AND ASSISTANT." By J. COURTNEY and D. K. CLARK. 7s.

255. *LOCOMOTIVE ENGINE-DRIVING*. A Practical Manual for Engineers in charge of Locomotive Engines. By MICHAEL REYNOLDS, M.S.E. Ninth Edition. 3s. 6d., limp; 4s. 6d. cloth boards.
256. *STATIONARY ENGINE-DRIVING*. A Practical Manual for Engineers in charge of Stationary Engines. By MICHAEL REYNOLDS, M.S.E. Fourth Edition. 3s. 6d. limp; 4s. 6d. cloth boards.
260. *IRON BRIDGES OF MODERATE SPAN:* their Construction and Erection. By HAMILTON W. PENDRED, C.E. 2s.

‡ *The* ‡ *indicates that these vols. may be had strongly bound at* 6d. *extra.*

MINING, METALLURGY, ETC.

4. *MINERALOGY*, Rudiments of; a concise View of the General Properties of Minerals. By A. RAMSAY, F.G.S., F.R.G.S., &c. Fourth Edition, revised and enlarged. Illustrated. 3s. 6d.‡

117. *SUBTERRANEOUS SURVEYING*, with and without the Magnetic Needle. By T. FENWICK and T. BAKER, C.E. Illustrated. 2s. 6d. ‡

135. *ELECTRO-METALLURGY;* Practically Treated. By ALEXANDER WATT. Tenth Edition, enlarged, with additional Illustrations, and including the most recent Processes. 3s. 6d.‡

172. *MINING TOOLS*, Manual of. For the Use of Mine Managers, Agents, Students, &c. By WILLIAM MORGANS. 2s. 6d.

172*. *MINING TOOLS, ATLAS* of Engravings to Illustrate the above, containing 235 Illustrations, drawn to Scale. 4to. 4s. 6d.

176. *METALLURGY OF IRON.* Containing History of Iron Manufacture, Methods of Assay, and Analyses of Iron Ores, Processes of Manufacture of Iron and Steel, &c. By H. BAUERMAN, F.G.S. Sixth Edition, revised and enlarged. 5s.‡

180. *COAL AND COAL MINING.* By the late Sir WARINGTON W. SMYTH, M.A., F.R.S. Seventh Edition, revised. 3s. 6d.‡

195. *THE MINERAL SURVEYOR AND VALUER'S COMPLETE GUIDE.* By W. LINTERN, M.E. Third Edition, including Magnetic and Angular Surveying. With Four Plates. 3s. 6d.‡

214. *SLATE AND SLATE QUARRYING*, Scientific, Practical, and Commercial. By D. C. DAVIES, F.G.S., Mining Engineer, &c. 3s.‡

264. *A FIRST BOOK OF MINING AND QUARRYING*, with the Sciences connected therewith, for Primary Schools and Self-Instruction. By J. H. COLLINS, F.G.S. Second Edition, with additions. 1s. 6d.

ARCHITECTURE, BUILDING, ETC.

16. *ARCHITECTURE—ORDERS*—The Orders and their Æsthetic Principles. By W. H. LEEDS. Illustrated. 1s. 6d.

17. *ARCHITECTURE—STYLES*—The History and Description of the Styles of Architecture of Various Countries, from the Earliest to the Present Period. By T. TALBOT BURY, F.R.I.B.A., &c. Illustrated. 2s.
*** ORDERS AND STYLES OF ARCHITECTURE, *in One Vol.*, 3s. 6d.

18. *ARCHITECTURE—DESIGN*—The Principles of Design in Architecture, as deducible from Nature and exemplified in the Works of the Greek and Gothic Architects. By E. L. GARBETT, Architect. Illustrated. 2s. 6d.

*** *The three preceding Works, in One handsome Vol., half bound, entitled* "MODERN ARCHITECTURE," *price* 6s.

22. *THE ART OF BUILDING*, Rudiments of. General Principles of Construction, Materials used in Building, Strength and Use of Materials, Working Drawings, Specifications, and Estimates. By E. DOBSON, 2s.‡

25. *MASONRY AND STONECUTTING:* Rudimentary Treatise on the Principles of Masonic Projection and their application to Construction. By EDWARD DOBSON, M.R.I.B.A., &c. 2s. 6d.‡

42. *COTTAGE BUILDING.* By C. BRUCE ALLEN, Architect. Eleventh Edition, revised and enlarged. With a Chapter on Economic Cottages for Allotments, by EDWARD E. ALLEN, C.E. 2s.

45. *LIMES, CEMENTS, MORTARS, CONCRETES, MASTICS,* PLASTERING, &c. By G. R. BURNELL, C.E Fourteenth Edition. 1s. 6d

57. *WARMING AND VENTILATION.* An Exposition of the General Principles as applied to Domestic and Public Buildings, Mines, Lighthouses, Ships, &c. By C. TOMLINSON, F.R.S., &c. Illustrated. 3s.

111. *ARCHES, PIERS, BUTTRESSES, &c.:* Experimental Essays on the Principles of Construction. By W. BLAND. Illustrated. 1s. 6d.

☞ *The ‡ indicates that these vols. may be had strongly bound at 6d. extra.*

Architecture, Building, etc., *continued.*

116. *THE ACOUSTICS OF PUBLIC BUILDINGS;* or, The Principles of the Science of Sound applied to the purposes of the Architect and Builder. By T. ROGER SMITH, M.R.I.B.A., Architect. Illustrated. 1s. 6d.

127. *ARCHITECTURAL MODELLING IN PAPER,* the Art of. By T. A. RICHARDSON, Architect. Illustrated. 1s. 6d.

128. *VITRUVIUS—THE ARCHITECTURE OF MARCUS VITRUVIUS POLLO.* In Ten Books. Translated from the Latin by JOSEPH GWILT, F.S.A., F.R.A.S. With 23 Plates. 5s.

130. *GRECIAN ARCHITECTURE,* An Inquiry into the Principles of Beauty in; with an Historical View of the Rise and Progress of the Art in Greece. By the EARL OF ABERDEEN. 1s.

*** *The two preceding Works in One handsome Vol., half bound, entitled* "ANCIENT ARCHITECTURE," *price* 6s.

132. *THE ERECTION OF DWELLING-HOUSES.* Illustrated by a Perspective View, Plans, Elevations, and Sections of a pair of Semi-detached Villas, with the Specification, Quantities, and Estimates, &c. By S. H. BROOKS. New Edition, with Plates. 2s. 6d.‡

156. *QUANTITIES & MEASUREMENTS* in Bricklayers', Masons', Plasterers', Plumbers', Painters', Paperhangers', Gilders', Smiths', Carpenters' and Joiners' Work. By A. C. BEATON, Surveyor. Ninth Edition. 1s. 6d.

175. *LOCKWOOD'S BUILDER'S PRICE BOOK FOR* 1895. A Comprehensive Handbook of the Latest Prices and Data for Builders, Architects, Engineers, and Contractors. Re-constructed, Re-written, and further Enlarged. By FRANCIS T. W. MILLER, A.R.I.B.A. 800 pages. 4s., cloth boards.

182. *CARPENTRY AND JOINERY*—THE ELEMENTARY PRINCIPLES OF CARPENTRY. Chiefly composed from the Standard Work of THOMAS TREDGOLD, C.E. With a TREATISE ON JOINERY by E. WYNDHAM TARN, M.A. Fifth Edition, Revised. 3s. 6d.‡

182*. *CARPENTRY AND JOINERY. ATLAS* of 35 Plates to accompany the above. With Descriptive Letterpress. 4to. 6s.

185. *THE COMPLETE MEASURER;* the Measurement of Boards, Glass, &c.; Unequal-sided, Square-sided, Octagonal-sided, Round Timber and Stone, and Standing Timber, &c. By RICHARD HORTON. Fifth Edition. 4s.; strongly bound in leather, 5s.

187. *HINTS TO YOUNG ARCHITECTS.* By G. WIGHTWICK. New Edition. By G. H. GUILLAUME. Illustrated. 3s. 6d.‡

188. *HOUSE PAINTING, GRAINING, MARBLING, AND SIGN WRITING:* with a Course of Elementary Drawing for House-Painters, Sign-Writers, &c., and a Collection of Useful Receipts. By ELLIS A. DAVIDSON. Sixth Edition. With Coloured Plates. 5s. cloth limp; 6s. cloth boards.

189. *THE RUDIMENTS OF PRACTICAL BRICKLAYING.* In Six Sections: General Principles; Arch Drawing, Cutting, and Setting; Pointing; Paving, Tiling, Materials; Slating and Plastering; Practical Geometry, Mensuration, &c. By ADAM HAMMOND. Eighth Edition. 1s. 6d.

191. *PLUMBING.* A Text-Book to the Practice of the Art or Craft of the Plumber. With Chapters upon House Drainage and Ventilation. Sixth Edition. With 380 Illustrations. By W. P. BUCHAN. 3s. 6d.‡

192. *THE TIMBER IMPORTER'S, TIMBER MERCHANT'S,* and BUILDER'S STANDARD GUIDE. By R. E. GRANDY. 2s.

206. *A BOOK ON BUILDING, Civil and Ecclesiastical,* including CHURCH RESTORATION. With the Theory of Domes and the Great Pyramid, &c. By Sir EDMUND BECKETT, Bart., LL.D., Q.C., F.R.A.S. 4s. 6d.‡

226. *THE JOINTS MADE AND USED BY BUILDERS* in the Construction of various kinds of Engineering and Architectural Works. By WYVILL J. CHRISTY, Architect. With upwards of 160 Engravings on Wood. 3s.‡

228. *THE CONSTRUCTION OF ROOFS OF WOOD AND IRON.* By E. WYNDHAM TARN, M.A., Architect. Third Edition, revised. 1s. 6d.

☞ *The ‡ indicates that these vols. may be had strongly bound at* 6d. *extra.*

Architecture, Building, etc., *continued.*

229. *ELEMENTARY DECORATION:* as applied to the Interior and Exterior Decoration of Dwelling-Houses, &c. By J. W. FACEY. 2s.

257. *PRACTICAL HOUSE DECORATION.* A Guide to the Art of Ornamental Painting. By JAMES W. FACEY. 2s. 6d.

*** *The two preceding Works, in One handsome Vol., half-bound, entitled* "HOUSE DECORATION. ELEMENTARY AND PRACTICAL," *price* 5s.

230. *A PRACTICAL TREATISE ON HANDRAILING.* Showing New and Simple Methods. By G. COLLINGS. Second Edition, Revised, including A TREATISE ON STAIRBUILDING. Plates. 2s. 6d.

247. *BUILDING ESTATES:* a Rudimentary Treatise on the Development, Sale, Purchase, and General Management of Building Land. By FOWLER MAITLAND, Surveyor. Second Edition, revised. 2s.

248. *PORTLAND CEMENT FOR USERS.* By HENRY FAIJA, Assoc. M. Inst. C.E. Third Edition, corrected. Illustrated. 2s.

252. *BRICKWORK:* a Practical Treatise, embodying the General and Higher Principles of Bricklaying, Cutting and Setting, &c. By F. WALKER. Third Edition, Revised and Enlarged. 1s. 6d.

23. 189. 265. *THE PRACTICAL BRICK AND TILE BOOK.* Comprising: BRICK AND TILE MAKING, by E. DOBSON, A.I.C.E.; PRACTICAL BRICKLAYING, by A. H. HAMMOND; BRICKCUTTING AND SETTING, by A. HAMMOND. 534 pp. with 270 Illustrations. 6s. Strongly half-bound.

253. *THE TIMBER MERCHANT'S, SAW-MILLER'S, AND* IMPORTER'S FREIGHT-BOOK AND ASSISTANT. By WM. RICHARDSON. With Additions by M. POWIS BALE, A.M.Inst.C.E. 3s.‡

258. *CIRCULAR WORK IN CARPENTRY AND JOINERY.* A Practical Treatise on Circular Work of Single and Double Curvature. By GEORGE COLLINGS. Second Edition, 2s. 6d.

259. *GAS FITTING:* A Practical Handbook treating of every Description of Gas Laying and Fitting. By JOHN BLACK. 2s. 6d.‡

261. *SHORING AND ITS APPLICATION:* A Handbook for the Use of Students. By GEORGE H. BLAGROVE. 1s. 6d.

265. *THE ART OF PRACTICAL BRICK CUTTING & SETTING.* By ADAM HAMMOND. With 90 Engravings. 1s. 6d.

267. *THE SCIENCE OF BUILDING:* An Elementary Treatise on the Principles of Construction. By E. WYNDHAM TARN, M.A. Lond. Third Edition, Revised and Enlarged. 3s. 6d.‡

271. *VENTILATION:* a Text-book to the Practice of the Art of Ventilating Buildings By W. P. BUCHAN, R.P., Sanitary Engineer, Author of "Plumbing," &c. 3s. 6d.‡

272. *ROOF CARPENTRY;* Practical Lessons in the Framing of Wood Roofs. For the Use of Working Carpenters. By GEO. COLLINGS, Author of "Handrailing and Stairbuilding," &c. 2s.

273. *THE PRACTICAL PLASTERER:* A Compendium of Plain and Ornamental Plaster Work. By WILFRED KEMP. 2s. [*Just published.*

SHIPBUILDING, NAVIGATION, ETC.

51. *NAVAL ARCHITECTURE.* An Exposition of the Elementary Principles. By J. PEAKE. Fifth Edition, with Plates. 3s. 6d.‡

53*. *SHIPS FOR OCEAN & RIVER SERVICE,* Elementary and Practical Principles of the Construction of. By H. A. SOMMERFELDT. 1s. 6d.

53**. *AN ATLAS OF ENGRAVINGS* to Illustrate the above. Twelve large folding plates. Royal 4to, cloth. 7s. 6d.

54. *MASTING, MAST-MAKING, AND RIGGING OF SHIPS,* Also Tables of Spars, Rigging, Blocks; Chain, Wire, and Hemp Ropes &c., relative to every class of vessels. By ROBERT KIPPING, N.A. 2s.‡

☞ *The ‡ indicates that these vols. may be had strongly bound at 6d. extra.*

Shipbuilding, Navigation, Marine Engineering, etc., *cont.*

54*. *IRON SHIP-BUILDING.* With Practical Examples and Details. By JOHN GRANTHAM, C.E. Fifth Edition. 4s.

55. *THE SAILOR'S SEA BOOK:* a Rudimentary Treatise on Navigation. By JAMES GREENWOOD, B.A. With numerous Woodcuts and Coloured Plates. New and enlarged edition. By W. H. ROSSER. 2s. 6d.‡

80. *MARINE ENGINES AND STEAM VESSELS.* By ROBERT MURRAY, C.E. Eighth Edition, thoroughly Revised, with Additions by the Author and by GEORGE CARLISLE, C.E. 4s. 6d. limp; 5s. cloth boards.

83*bis*. *THE FORMS OF SHIPS AND BOATS.* By W. BLAND. Ninth Edition, with numerous Illustrations and Models. 1s. 6d.

99. *NAVIGATION AND NAUTICAL ASTRONOMY,* in Theory and Practice. By Prof. J. R. YOUNG. New Edition. 2s. 6d.

106. *SHIPS' ANCHORS,* a Treatise on. By G. COTSELL, N.A. 1s. 6d.

149. *SAILS AND SAIL-MAKING.* With Draughting, and the Centre of Effort of the Sails; Weights and Sizes of Ropes; Masting, Rigging, and Sails of Steam Vessels, &c. 13th Edition. By R. KIPPING, N.A. 2s. 6d.‡

155. *ENGINEER'S GUIDE TO THE ROYAL & MERCANTILE* NAVIES. By a PRACTICAL ENGINEER. Revised by D. F. M'CARTHY. 3s.

55 & 204. *PRACTICAL NAVIGATION.* Consisting of The Sailor's Sea-Book. By JAMES GREENWOOD and W. H. ROSSER. Together with the requisite Mathematical and Nautical Tables for the Working of the Problems. By H. LAW, C.E., and Prof. J. R. YOUNG. 7s. Half-bound.

AGRICULTURE, GARDENING, ETC.

61*. *A COMPLETE READY RECKONER FOR THE ADMEASUREMENT OF LAND,* &c. By A. ARMAN. Fourth Edition, revised and extended by C. NORRIS, Surveyor, Valuer, &c. 2s.

131. *MILLER'S, CORN MERCHANT'S, AND FARMER'S* READY RECKONER. Second Edition, with a Price List of Modern Flour-Mill Machinery, by W. S. HUTTON, C.E. 2s.

140. *SOILS, MANURES, AND CROPS.* (Vol. 1. OUTLINES OF MODERN FARMING.) By R. SCOTT BURN. Woodcuts. 2s.

141. *FARMING & FARMING ECONOMY,* Notes, Historical and Practical, on. (Vol. 2. OUTLINES OF MODERN FARMING.) By R. SCOTT BURN. 3s.

142. *STOCK; CATTLE, SHEEP, AND HORSES.* (Vol. 3. OUTLINES OF MODERN FARMING.) By R. SCOTT BURN. Woodcuts. 2s. 6d.

145. *DAIRY, PIGS, AND POULTRY,* Management of the. By R. SCOTT BURN. (Vol. 4. OUTLINES OF MODERN FARMING.) 2s.

146. *UTILIZATION OF SEWAGE, IRRIGATION, AND* RECLAMATION OF WASTE LAND. (Vol. 5. OUTLINES OF MODERN FARMING.) By R. SCOTT BURN. Woodcuts. 2s. 6d.

*** *Nos.* 140-1-2-5-6, *in One Vol., handsomely half-bound, entitled,* "OUTLINES OF MODERN FARMING." By ROBERT SCOTT BURN. *Price* 12s.

177. *FRUIT TREES,* The Scientific and Profitable Culture of. From the French of DU PUIL. Revised by GEO. GLENNY. 187 Woodcuts. 3s. 6d.

198. *SHEEP; THE HISTORY, STRUCTURE, ECONOMY, AND* DISEASES OF. By W. C. SPOONER, M.R.V.C., &c. Fifth Edition, enlarged, including Specimens of New and Improved Breeds. 3s. 6d.‡

201. *KITCHEN GARDENING MADE EASY.* By GEORGE M. F. GLENNY. Illustrated. 1s. 6d.‡

207. *OUTLINES OF FARM MANAGEMENT, and the Organisation of Farm Labour.* By R. SCOTT BURN. 2s. 6d.‡

208. *OUTLINES OF LANDED ESTATES MANAGEMENT.* By R. SCOTT BURN. 2s. 6d.

*** *Nos.* 207 & 208 *in One Vol., handsomely half-bound, entitled* "OUTLINES OF LANDED ESTATES AND FARM MANAGEMENT." By R. SCOTT BURN. *Price* 6s.

☞ *The ‡ indicates that these vols. may be had strongly bound at 6d. extra.*

Agriculture, Gardening, etc., *continued.*

209. *THE TREE PLANTER AND PLANT PROPAGATOR.* A Practical Manual on the Propagation of Forest Trees, Fruit Trees, Flowering Shrubs, Flowering Plants, &c. By SAMUEL WOOD. 2s.

210. *THE TREE PRUNER.* A Practical Manual on the Pruning of Fruit Trees, including also their Training and Renovation; also the Pruning of Shrubs, Climbers, and Flowering Plants. By SAMUEL WOOD. 1s. 6d.

*** *Nos.* 209 *&* 210 *in One Vol., handsomely half-bound, entitled* "THE TREE PLANTER, PROPAGATOR, AND PRUNER." By SAMUEL WOOD. *Price* 3s. 6d.

218. *THE HAY AND STRAW MEASURER:* Being New Tables for the Use of Auctioneers, Valuers, Farmers, Hay and Straw Dealers, &c. By JOHN STEELE. Fifth Edition. 2s.

222. *SUBURBAN FARMING.* The Laying-out and Cultivation of Farms, adapted to the Produce of Milk, Butter, and Cheese, Eggs, Poultry, and Pigs. By Prof. JOHN DONALDSON and R. SCOTT BURN. 3s. 6d.‡

231. *THE ART OF GRAFTING AND BUDDING.* By CHARLES BALTET. With Illustrations. 2s. 6d.‡

232. *COTTAGE GARDENING;* or, Flowers, Fruits, and Vegetables for Small Gardens. By E. HOBDAY. 1s. 6d.

233. *GARDEN RECEIPTS.* Edited by CHARLES W. QUIN. 1s. 6d.

234. *MARKET AND KITCHEN GARDENING.* By C. W. SHAW, late Editor of "Gardening Illustrated." 3s.‡

239. *DRAINING AND EMBANKING.* A Practical Treatise, embodying the most recent experience in the Application of Improved Methods. By JOHN SCOTT, late Professor of Agriculture and Rural Economy at the Royal Agricultural College, Cirencester. With 68 Illustrations. 1s. 6d.

240. *IRRIGATION AND WATER SUPPLY.* A Treatise on Water Meadows, Sewage Irrigation, and Warping; the Construction of Wells, Ponds, and Reservoirs, &c. By Prof. JOHN SCOTT. With 34 Illus. 1s. 6d.

241. *FARM ROADS, FENCES, AND GATES.* A Practical Treatise on the Roads, Tramways, and Waterways of the Farm; the Principles of Enclosures; and the different kinds of Fences, Gates, and Stiles. By Professor JOHN SCOTT. With 75 Illustrations. 1s. 6d.

242. *FARM BUILDINGS.* A Practical Treatise on the Buildings necessary for various kinds of Farms, their Arrangement and Construction, with Plans and Estimates. By Prof. JOHN SCOTT. With 105 Illus. 2s.

243. *BARN IMPLEMENTS AND MACHINES.* A Practical Treatise on the Application of Power to the Operations of Agriculture; and on various Machines used in the Threshing-barn, in the Stock-yard, and in the Dairy, &c. By Prof. J. SCOTT. With 123 Illustrations. 2s.

244. *FIELD IMPLEMENTS AND MACHINES.* A Practical Treatise on the Varieties now in use, with Principles and Details of Construction, their Points of Excellence, and Management. By Professor JOHN SCOTT. With 138 Illustrations. 2s.

245. *AGRICULTURAL SURVEYING.* A Practical Treatise on Land Surveying, Levelling, and Setting-out; and on Measuring and Estimating Quantities, Weights, and Values of Materials, Produce, Stock, &c. By Prof. JOHN SCOTT. With 62 Illustrations. 1s. 6d.

*** *Nos.* 239 *to* 245 *in One Vol., handsomely half-bound, entitled* "THE COMPLETE TEXT-BOOK OF FARM ENGINEERING." By Professor JOHN SCOTT. *Price* 12s.

250. *MEAT PRODUCTION.* A Manual for Producers, Distributors, &c. By JOHN EWART. 2s. 6d.‡

266. *BOOK-KEEPING FOR FARMERS & ESTATE OWNERS.* By J. M. WOODMAN, Chartered Accountant. 2s. 6d. cloth limp; 3s. 6d. cloth boards.

☞ *The* ‡ *indicates that these vols may be had strongly bound at* 6d. *extra.*

MATHEMATICS, ARITHMETIC, ETC.

32. *MATHEMATICAL INSTRUMENTS*, a Treatise on; Their Construction, Adjustment, Testing, and Use concisely Explained. By J. F. HEATHER, M.A. Fourteenth Edition, revised, with additions, by A. T. WALMISLEY, M.I.C.E., Fellow of the Surveyors' Institution. Original Edition, in 1 vol., Illustrated. 2s.‡

*** *In ordering the above, be careful to say, "Original Edition" (No. 32), to distinguish it from the Enlarged Edition in 3 vols. (Nos. 168-9-70.)*

76. *DESCRIPTIVE GEOMETRY*, an Elementary Treatise on; with a Theory of Shadows and of Perspective, extracted from the French of G. MONGE. To which is added, a description of the Principles and Practice of Isometrical Projection. By J. F. HEATHER, M.A. With 14 Plates. 2s.

178. *PRACTICAL PLANE GEOMETRY:* giving the Simplest Modes of Constructing Figures contained in one Plane and Geometrical Construction of the Ground. By J. F. HEATHER, M.A. With 215 Woodcuts. 2s.

83. *COMMERCIAL BOOK-KEEPING.* With Commercial Phrases and Forms in English, French, Italian, and German. By JAMES HADDON, M.A., Arithmetical Master of King's College School, London. 1s. 6d.

84. *ARITHMETIC*, a Rudimentary Treatise on: with full Explanations of its Theoretical Principles, and numerous Examples for Practice. By Professor J. R. YOUNG. Twelfth Edition. 1s. 6d.

84*. A KEY to the above, containing Solutions in full to the Exercises, together with Comments, Explanations, and Improved Processes, for the Use of Teachers and Unassisted Learners. By J. R. YOUNG. 1s. 6d.

85. *EQUATIONAL ARITHMETIC*, applied to Questions of Interest, Annuities, Life Assurance, and General Commerce; with various Tables by which all Calculations may be greatly facilitated. By W. HIPSLEY. 2s.

86. *ALGEBRA*, the Elements of. By JAMES HADDON, M.A. With Appendix, containing miscellaneous Investigations, and a Collection of Problems in various parts of Algebra. 2s.

86*. A KEY AND COMPANION to the above Book, forming an extensive repository of Solved Examples and Problems in Illustration of the various Expedients necessary in Algebraical Operations. By J. R. YOUNG. 1s. 6d.

88. *EUCLID*, THE ELEMENTS OF: with many additional Propositions
89. and Explanatory Notes: to which is prefixed, an Introductory Essay on Logic. By HENRY LAW, C.E. 2s. 6d.‡

*** *Sold also separately, viz.:—*

88. EUCLID, The First Three Books. By HENRY LAW, C.E. 1s. 6d.
89. EUCLID, Books 4, 5, 6, 11, 12. By HENRY LAW, C.E. 1s. 6d.

90. *ANALYTICAL GEOMETRY AND CONIC SECTIONS* By JAMES HANN. A New Edition, by Professor J. R. YOUNG. 2s.‡

91. *PLANE TRIGONOMETRY*, the Elements of. By JAMES HANN, formerly Mathematical Master of King's College, London. 1s. 6d.

92. *SPHERICAL TRIGONOMETRY*, the Elements of. By JAMES HANN. Revised by CHARLES H. DOWLING, C.E. 1s.

*** *Or with "The Elements of Plane Trigonometry," in One Volume, 2s. 6d.*

93. *MENSURATION AND MEASURING.* With the Mensuration and Levelling of Land for the Purposes of Modern Engineering. By T. BAKER, C.E. New Edition by E. NUGENT, C.E. Illustrated. 1s. 6d.

101. *DIFFERENTIAL CALCULUS*, Elements of the. By W. S. B. WOOLHOUSE, F.R.A.S., &c. 1s. 6d.

102. *INTEGRAL CALCULUS*, Rudimentary Treatise on the. By HOMERSHAM COX, B.A. Illustrated. 1s.

136. *ARITHMETIC*, Rudimentary, for the Use of Schools and Self-Instruction. By JAMES HADDON, M.A. Revised by A. ARMAN. 1s. 6d.

137. A KEY TO HADDON'S RUDIMENTARY ARITHMETIC. By A. ARMAN. 1s. 6d.

☞ *The ‡ indicates that these vols. may be had strongly bound at 6d. extra.*

Mathematics, Arithmetic, etc., *continued.*

168. *DRAWING AND MEASURING INSTRUMENTS.* Including—I. Instruments employed in Geometrical and Mechanical Drawing, and in the Construction, Copying, and Measurement of Maps and Plans. II. Instruments used for the purposes of Accurate Measurement, and for Arithmetical Computations. By J. F. HEATHER, M.A. Illustrated. 1s. 6d.

169. *OPTICAL INSTRUMENTS.* Including (more especially) Telescopes, Microscopes, and Apparatus for producing copies of Maps and Plans by Photography. By J. F. HEATHER, M.A. Illustrated. 1s. 6d.

170. *SURVEYING AND ASTRONOMICAL INSTRUMENTS.* Including—I. Instruments Used for Determining the Geometrical Features of a portion of Ground. II. Instruments Employed in Astronomical Observations. By J. F. HEATHER, M.A. Illustrated. 1s. 6d.

*** *The above three volumes form an enlargement of the Author's original work, "Mathematical Instruments."* (*See No. 32 in the Series.*)

168. } 169. } 170. } *MATHEMATICAL INSTRUMENTS.* By J. F. HEATHER, M.A. Enlarged Edition, for the most part entirely re-written. The 3 Parts as above, in One thick Volume. With numerous Illustrations. 4s. 6d.‡

158. *THE SLIDE RULE, AND HOW TO USE IT;* containing full, easy, and simple Instructions to perform all Business Calculations with unexampled rapidity and accuracy. By CHARLES HOARE, C.E. Sixth Edition. With a Slide Rule in tuck of cover. 2s. 6d.‡

196. *THEORY OF COMPOUND INTEREST AND ANNUITIES;* with Tables of Logarithms for the more Difficult Computations of Interest, Discount, Annuities, &c. By FEDOR THOMAN. Fourth Edition. 4s.‡

199. *THE COMPENDIOUS CALCULATOR;* or, Easy and Concise Methods of Performing the various Arithmetical Operations required in Commercial and Business Transactions; together with Useful Tables. By D. O'GORMAN. Twenty-seventh Edition, carefully revised by C. NORRIS. 2s 6d., cloth limp; 3s. 6d., strongly half-bound in leather.

204. *MATHEMATICAL TABLES,* for Trigonometrical, Astronomical, and Nautical Calculations; to which is prefixed a Treatise on Logarithms. By HENRY LAW, C.E. Together with a Series of Tables for Navigation and Nautical Astronomy. By Prof. J. R. YOUNG. New Edition. 4s.

204*. *LOGARITHMS.* With Mathematical Tables for Trigonometrical, Astronomical, and Nautical Calculations. By HENRY LAW, M.Inst.C.E. New and Revised Edition. (Forming part of the above Work). 3s.

221. *MEASURES, WEIGHTS, AND MONEYS OF ALL NATIONS,* and an Analysis of the Christian, Hebrew, and Mahometan Calendars. By W. S. B. WOOLHOUSE, F.R.A.S., F.S.S. Seventh Edition, 2s. 6d.‡

227. *MATHEMATICS AS APPLIED TO THE CONSTRUCTIVE ARTS.* Illustrating the various processes of Mathematical Investigation, by means of Arithmetical and Simple Algebraical Equations and Practical Examples. By FRANCIS CAMPIN, C.E. Third Edition. 3s.‡

PHYSICAL SCIENCE, NATURAL PHILOSOPHY, ETC.

1. *CHEMISTRY.* By Professor GEORGE FOWNES, F.R.S. With an Appendix on the Application of Chemistry to Agriculture. 1s.

2. *NATURAL PHILOSOPHY,* Introduction to the Study of. By C. TOMLINSON. Woodcuts. 1s. 6d.

6. *MECHANICS,* Rudimentary Treatise on. By CHARLES TOMLINSON. Illustrated. 1s. 6d.

7. *ELECTRICITY;* showing the General Principles of Electrical Science, and the purposes to which it has been applied. By Sir W. SNOW HARRIS, F.R.S., &c. With Additions by R. SABINE, C.E., F.S.A. 11s. 6d.

7*. *GALVANISM.* By Sir W. SNOW HARRIS. New Edition by ROBERT SABINE, C.E., F.S.A. 1s. 6d.

8. *MAGNETISM;* being a concise Exposition of the General Principles of Magnetical Science. By Sir W. SNOW HARRIS. New Edition, revised by H. M. NOAD, Ph.D. With 165 Woodcuts. 3s. 6d.‡

☞ *The ‡ indicates that these vols. may be had strongly bound at 6d. extra.*

Physical Science, Natural Philosophy, etc., *continued.*

11. *THE ELECTRIC TELEGRAPH;* its History and Progress; with Descriptions of some of the Apparatus. By R. SABINE, C.E., F.S.A. 3s.
12. *PNEUMATICS,* including Acoustics and the Phenomena of Wind Currents, for the Use of Beginners By CHARLES TOMLINSON, F.R.S. Fourth Edition, enlarged. Illustrated. 1s. 6d.
72. *MANUAL OF THE MOLLUSCA;* a Treatise on Recent and Fossil Shells. By Dr. S. P. WOODWARD, A.L.S. Fourth Edition. With Plates and 300 Woodcuts. 7s. 6d., cloth.
96. *ASTRONOMY.* By the late Rev. ROBERT MAIN, M.A. Third Edition, by WILLIAM THYNNE LYNN, B.A., F.R.A.S. 2s.
97. *STATICS AND DYNAMICS,* the Principles and Practice of; embracing also a clear development of Hydrostatics, Hydrodynamics, and Central Forces. By T. BAKER, C.E. Fourth Edition. 1s. 6d.
173. *PHYSICAL GEOLOGY,* partly based on Major-General PORTLOCK'S "Rudiments of Geology." By RALPH TATE, A.L.S., &c. Woodcuts. 2s.
174. *HISTORICAL GEOLOGY,* partly based on Major-General PORTLOCK'S "Rudiments." By RALPH TATE, A.L.S., &c. Woodcuts. 2s. 6d.
173 & 174. *RUDIMENTARY TREATISE ON GEOLOGY,* Physical and Historical. Partly based on Major-General PORTLOCK'S "Rudiments of Geology." By RALPH TATE, A.L.S., F.G.S., &c. In One Volume. 4s. 6d.‡
183 & 184. *ANIMAL PHYSICS,* Handbook of. By Dr. LARDNER, D.C.L., formerly Professor of Natural Philosophy and Astronomy in University College, Lond. With 520 Illustrations. In One Vol. 7s. 6d., cloth boards.

*** *Sold also in Two Parts, as follows :—*

183. ANIMAL PHYSICS. By Dr. LARDNER. Part I., Chapters I.—VII. 4s.
184. ANIMAL PHYSICS. By Dr. LARDNER. Part II., Chapters VIII.—XVIII. 3s.
269. *LIGHT:* an Introduction to the Science of Optics, for the Use of Students of Architecture, Engineering, and other Applied Sciences. By E. WYNDHAM TARN, M.A. 1s. 6d.

FINE ARTS.

20. *PERSPECTIVE FOR BEGINNERS.* Adapted to Young Students and Amateurs in Architecture, Painting, &c. By GEORGE PYNE. 2s.
40 *GLASS STAINING, AND THE ART OF PAINTING ON GLASS.* From the German of Dr. GESSERT and EMANUEL OTTO FROMBERG. With an Appendix on THE ART OF ENAMELLING. 2s 6d.
69. *MUSIC,* A Rudimentary and Practical Treatise on. With numerous Examples. By CHARLES CHILD SPENCER. 2s. 6d.
71. *PIANOFORTE,* The Art of Playing the. With numerous Exercises & Lessons from the Best Masters. By CHARLES CHILD SPENCER. 1s.6d.
69-71. *MUSIC & THE PIANOFORTE.* In one vol. Half bound, 5s.
181. *PAINTING POPULARLY EXPLAINED,* including Fresco, Oil, Mosaic, Water Colour, Water-Glass, Tempera, Encaustic, Miniature, Painting on Ivory, Vellum, Pottery, Enamel, Glass, &c. With Historical Sketches of the Progress of the Art by THOMAS JOHN GULLICK, assisted by JOHN TIMBS, F.S.A. Sixth Edition, revised and enlarged. 5s.‡
186. *A GRAMMAR OF COLOURING,* applied to Decorative Painting and the Arts. By GEORGE FIELD. New Edition, enlarged and adapted to the Use of the Ornamental Painter and Designer. By ELLIS A. DAVIDSON. With two new Coloured Diagrams, &c. 3s.‡
246. *A DICTIONARY OF PAINTERS, AND HANDBOOK FOR* PICTURE AMATEURS; including Methods of Painting, Cleaning, Relining and Restoring, Schools of Painting, &c. With Notes on the Copyists and Imitators of each Master. By PHILIPPE DARYL. 2s. 6d.‡

☞ *The ‡ indicates that these vols. may be had strongly bound at 6d. extra.*

INDUSTRIAL AND USEFUL ARTS.

23. *BRICKS AND TILES*, Rudimentary Treatise on the Manufacture of. By E. DOBSON, M.R.I.B.A. Illustrated, 3s.‡
67. *CLOCKS, WATCHES, AND BELLS*, a Rudimentary Treatise on. By Sir EDMUND BECKETT, LL.D., Q.C. Seventh Edition, revised and enlarged. 4s. 6d. limp; 5s. 6d. cloth boards.
83**. *CONSTRUCTION OF DOOR LOCKS.* Compiled from the Papers of A. C. HOBBS, and Edited by CHARLES TOMLINSON, F.R.S. 2s. 6d.
162. *THE BRASS FOUNDER'S MANUAL;* Instructions for Modelling, Pattern-Making, Moulding, Turning, Filing, Burnishing, Bronzing, &c. With copious Receipts, &c. By WALTER GRAHAM. 2s.‡
205. *THE ART OF LETTER PAINTING MADE EASY.* By J. G. BADENOCH. Illustrated with 12 full-page Engravings of Examples. 1s. 6d.
215. *THE GOLDSMITH'S HANDBOOK*, containing full Instructions for the Alloying and Working of Gold. By GEORGE E. GEE, 3s.‡
225. *THE SILVERSMITH'S HANDBOOK*, containing full Instructions for the Alloying and Working of Silver. By GEORGE E. GEE. 3s.‡

*** *The two preceding Works, in One handsome Vol., half-bound, entitled* "THE GOLDSMITH'S & SILVERSMITH'S COMPLETE HANDBOOK." 7s.

249. *THE HALL-MARKING OF JEWELLERY PRACTICALLY CONSIDERED.* By GEORGE E. GEE. 3s.‡
224. *COACH BUILDING*, A Practical Treatise, Historical and Descriptive. By J. W. BURGESS. 2s. 6d.‡
235. *PRACTICAL ORGAN BUILDING.* By W. E. DICKSON, M.A., Precentor of Ely Cathedral. Illustrated. 2s. 6d.‡
262. *THE ART OF BOOT AND SHOEMAKING.* By JOHN BEDFORD LENO. Numerous Illustrations. Third Edition. 2s.
263. *MECHANICAL DENTISTRY:* A Practical Treatise on the Construction of the Various Kinds of Artificial Dentures, with Formulæ, Tables, Receipts, &c. By CHARLES HUNTER. Third Edition. 3s.‡
270. *WOOD ENGRAVING:* A Practical and Easy Introduction to the Study of the Art. By W. N. BROWN. 1s. 6d.

MISCELLANEOUS VOLUMES.

36. *A DICTIONARY OF TERMS used in ARCHITECTURE, BUILDING, ENGINEERING, MINING, METALLURGY, ARCHÆOLOGY, the FINE ARTS, &c.* By JOHN WEALE. Sixth Edition. Revised by ROBERT HUNT, F.R.S. Illustrated. 5s. limp; 6s. cloth boards.
50. *LABOUR CONTRACTS.* A Popular Handbook on the Law of Contracts for Works and Services. By DAVID GIBBONS. Fourth Edition, Revised, with Appendix of Statutes by T. F. UTILEY, Solicitor, 3s. 6d. cloth.
112. *MANUAL OF DOMESTIC MEDICINE.* By R. GOODING, B.A., M.D. A Family Guide in all Cases of Accident and Emergency 2s.
112*. *MANAGEMENT OF HEALTH.* A Manual of Home and Personal Hygiene. By the Rev. JAMES BAIRD, B.A. 1s.
150. *LOGIC*, Pure and Applied. By S. H. EMMENS. 1s. 6d.
153. *SELECTIONS FROM LOCKE'S ESSAYS ON THE HUMAN UNDERSTANDING.* With Notes by S. H. EMMENS. 2s.
154. *GENERAL HINTS TO EMIGRANTS.* 2s.
157. *THE EMIGRANT'S GUIDE TO NATAL.* By R. MANN. 2s.
193. *HANDBOOK OF FIELD FORTIFICATION.* By Major W. W. KNOLLYS, F.R.G.S. With 163 Woodcuts. 3s.‡
194. *THE HOUSE MANAGER:* Being a Guide to Housekeeping. Practical Cookery, Pickling and Preserving, Household Work, Dairy Management, &c. By AN OLD HOUSEKEEPER. 3s. 6d.‡
194, 112 & 112*. *HOUSE BOOK (The).* Comprising:—I. THE HOUSE MANAGER. By an OLD HOUSEKEEPER. II. DOMESTIC MEDICINE. By R. GOODING, M.D. III. MANAGEMENT OF HEALTH. By J. BAIRD. In One Vol., half-bound, 6s.

☞ *The ‡ indicates that these vols. may be had strongly bound at 6d. extra.*

EDUCATIONAL AND CLASSICAL SERIES.

HISTORY.

1. **England, Outlines of the History of;** more especially with reference to the Origin and Progress of the English Constitution. By WILLIAM DOUGLAS HAMILTON, F.S.A., of Her Majesty's Public Record Office. 4th Edition, revised. 5s.; cloth boards, 6s.

5. **Greece, Outlines of the History of;** in connection with the Rise of the Arts and Civilization in Europe. By W. DOUGLAS HAMILTON, of University College, London, and EDWARD LEVIEN, M.A., of Balliol College, Oxford. 2s. 6d.; cloth boards, 3s. 6d.

7. **Rome, Outlines of the History of:** from the Earliest Period to the Christian Era and the Commencement of the Decline of the Empire. By EDWARD LEVIEN, of Balliol College, Oxford. Map, 2s. 6d.; cl. bds. 3s. 6d.

9. **Chronology of History, Art, Literature, and Progress,** from the Creation of the World to the Present Time. The Continuation by W. D. HAMILTON, F.S.A. 3s.; cloth boards, 3s. 6d.

ENGLISH LANGUAGE AND MISCELLANEOUS.

11. **Grammar of the English Tongue,** Spoken and Written. With an Introduction to the Study of Comparative Philology. By HYDE CLARKE, D.C.L. Fifth Edition. 1s. 6d.

12. **Dictionary of the English Language,** as Spoken and Written. Containing above 100,000 Words. By HYDE CLARKE, D.C.L. 3s. 6d.; cloth boards, 4s. 6d.; complete with the GRAMMAR, cloth bds., 5s. 6d.

48. **Composition and Punctuation,** familiarly Explained for those who have neglected the Study of Grammar. By JUSTIN BRENAN. 18th Edition. 1s. 6d.

49. **Derivative Spelling-Book:** Giving the Origin of Every Word from the Greek, Latin, Saxon, German, Teutonic, Dutch, French, Spanish, and other Languages; with their present Acceptation and Pronunciation. By J. ROWBOTHAM, F.R.A.S. Improved Edition. 1s 6d.

The Art of Extempore Speaking: Hints for the Pulpit, the Senate, and the Bar. By M. BAUTAIN, Vicar-General and Professor at the Sorbonne. Translated from the French. 8th Edition, carefully corrected. 2s. 6d.

53. **Places and Facts in Political and Physical Geography,** for Candidates in Examinations. By the Rev. EDGAR RAND, B.A. 1s.

54. **Analytical Chemistry,** Qualitative and Quantitative, a Course of. To which is prefixed, a Brief Treatise upon Modern Chemical Nomenclature and Notation. By WM. W. PINK and GEORGE E. WEBSTER. 2s.

THE SCHOOL MANAGERS' SERIES OF READING BOOKS,

Edited by the Rev. A. R. GRANT, Rector of Hitcham, and Honorary Canon of Ely; formerly H.M. Inspector of Schools.

INTRODUCTORY PRIMER, 3d.

	s.	d.		s.	d.
FIRST STANDARD	0	6	FOURTH STANDARD	1	2
SECOND "	0	10	FIFTH "	1	6
THIRD	1	0	SIXTH "	1	6

LESSONS FROM THE BIBLE. Part I. Old Testament. 1s.

LESSONS FROM THE BIBLE. Part II. New Testament, to which is added THE GEOGRAPHY OF THE BIBLE, for very young Children. By Rev. C. THORNTON FORSTER. 1s. 2d. *** Or the Two Parts in One Volume. 2s.

FRENCH.

24. **French Grammar.** With Complete and Concise Rules on the Genders of French Nouns. By G. L. STRAUSS, Ph.D. 1s. 6d.
25. **French-English Dictionary.** Comprising a large number of New Terms used in Engineering, Mining, &c. By ALFRED ELWES. 1s. 6d.
26. **English-French Dictionary.** By ALFRED ELWES. 2s.
25,26. **French Dictionary** (as above). Complete, in One Vol., 3s.; cloth boards, 3s. 6d. *** Or with the GRAMMAR, cloth boards, 4s. 6d.
47. **French and English Phrase Book:** containing Introductory Lessons, with Translations, several Vocabularies of Words a Collection of suitable Phrases, and Easy Familiar Dialogues. 1s. 6d.

GERMAN.

39. **German Grammar.** Adapted for English Students, from Heyse's Theoretical and Practical Grammar, by Dr. G. L. STRAUSS. 1s. 6d.
40. **German Reader:** A Series of Extracts, carefully culled from the most approved Authors of Germany; with Notes, Philological and Explanatory. By G. L. STRAUSS, Ph.D. 1s.
41-43. **German Triglot Dictionary.** By N. E. S. A. HAMILTON. In Three Parts. Part I. German-French-English. Part II. English-German-French. Part III. French-German-English. 3s., or cloth boards, 4s.
41-43 & 39. **German Triglot Dictionary** (as above), together with German Grammar (No. 39). in One Volume, cloth boards, 5s.

ITALIAN.

27. **Italian Grammar,** arranged in Twenty Lessons, with a Course of Exercises. By ALFRED ELWES. 1s. 6d.
28. **Italian Triglot Dictionary,** wherein the Genders of all the Italian and French Nouns are carefully noted down. By ALFRED ELWES. Vol. 1. Italian-English-French. 2s. 6d.
30. **Italian Triglot Dictionary.** By A. ELWES. Vol. 2. English-French-Italian. 2s. 6d.
32. **Italian Triglot Dictionary.** By ALFRED ELWES. Vol. 3. French-Italian-English. 2s. 6d.
28,30, 32. **Italian Triglot Dictionary** (as above). In One Vol., 7s. 6d. Cloth boards.

SPANISH AND PORTUGUESE.

34. **Spanish Grammar,** in a Simple and Practical Form. With a Course of Exercises. By ALFRED ELWES. 1s. 6d.
35. **Spanish-English and English-Spanish Dictionary.** Including a large number of Technical Terms used in Mining, Engineering, &c. with the proper Accents and the Gender of every Noun. By ALFRED ELWES 4s.; cloth boards, 5s. *** Or with the GRAMMAR, cloth boards, 6s.
55. **Portuguese Grammar,** in a Simple and Practical Form. With a Course of Exercises. By ALFRED ELWES. 1s. 6d.
56. **Portuguese-English and English-Portuguese Dictionary.** Including a large number of Technical Terms used in Mining, Engineering, &c., with the proper Accents and the Gender of every Noun. By ALFRED ELWES. Third Edition, Revised, 5s.; cloth boards, 6s. *** Or with the GRAMMAR, cloth boards, 7s.

HEBREW.

46*. **Hebrew Grammar.** By Dr. BRESSLAU. 1s. 6d.
44. **Hebrew and English Dictionary,** Biblical and Rabbinical; containing the Hebrew and Chaldee Roots of the Old Testament Post-Rabbinical Writings. By Dr. BRESSLAU. 6s.
46. **English and Hebrew Dictionary.** By Dr. BRESSLAU. 3s.
14,46. **Hebrew Dictionary** (as above), in Two Vols., complete, with 46*. the GRAMMAR, cloth boards, 12s.

LATIN.

19. **Latin Grammar.** Containing the Inflections and Elementary Principles of Translation and Construction. By the Rev. THOMAS GOODWIN, M.A., Head Master of the Greenwich Proprietary School. 1s. 6d.

20. **Latin-English Dictionary.** By the Rev. THOMAS GOODWIN, M.A. 2s.

22. **English-Latin Dictionary;** together with an Appendix of French and Italian Words which have their origin from the Latin. By the Rev. THOMAS GOODWIN, M.A. 1s. 6d.

20,22. **Latin Dictionary** (as above). Complete in One Vol., 3s. 6d. cloth boards, 4s. 6d. *** Or with the GRAMMAR, cloth boards, 5s. 6d.

LATIN CLASSICS. With Explanatory Notes in English.

1. **Latin Delectus.** Containing Extracts from Classical Authors, with Genealogical Vocabularies and Explanatory Notes, by H. YOUNG. 1s. 6d.

2. **Cæsaris Commentarii de Bello Gallico.** Notes, and a Geographical Register for the Use of Schools, by H. YOUNG. 2s.

3. **Cornelius Nepos.** With Notes. By H. YOUNG. 1s.

4. **Virgilii Maronis Bucolica et Georgica.** With Notes on the Bucolics by W. RUSHTON, M.A., and on the Georgics by H. YOUNG. 1s. 6d.

5. **Virgilii Maronis Æneis.** With Notes, Critical and Explanatory, by H. YOUNG. New Edition, revised and improved With copious Additional Notes by Rev. T. H. L. LEARY, D.C.L., formerly Scholar of Brasenose College, Oxford. 3s.

5* ——— Part 1. Books i.—vi., 1s. 6d.

5** ——— Part 2. Books vii.—xii., 2s.

6. **Horace;** Odes, Epode, and Carmen Sæculare. Notes by H. YOUNG. 1s. 6d.

7. **Horace;** Satires, Epistles, and Ars Poetica. Notes by W. BROWNRIGG SMITH, M.A., F.R.G.S. 1s. 6d.

8. **Sallustii Crispi Catalina et Bellum Jugurthinum.** Notes, Critical and Explanatory, by W. M. DONNE, B.A., Trin. Coll., Cam. 1s. 6d.

9. **Terentii Andria et Heautontimorumenos.** With Notes, Critical and Explanatory, by the Rev. JAMES DAVIES, M.A. 1s. 6d.

10. **Terentii Adelphi, Hecyra, Phormio.** Edited, with Notes, Critical and Explanatory, by the Rev. JAMES DAVIES, M.A. 2s.

11. **Terentii Eunuchus, Comœdia.** Notes, by Rev. J. DAVIES, M.A. 1s. 6d.

12. **Ciceronis Oratio pro Sexto Roscio Amerino.** Edited, with an Introduction, Analysis, and Notes, Explanatory and Critical, by the Rev. JAMES DAVIES, M.A. 1s. 6d.

13. **Ciceronis Orationes in Catilinam, Verrem, et pro Archia.** With Introduction, Analysis, and Notes, Explanatory and Critical, by Rev. T. H. L. LEARY, D.C.L. formerly Scholar of Brasenose College, Oxford. 1s. 6d.

14. **Ciceronis Cato Major, Lælius, Brutus, sive de Senectute, de Amicitia, de Claris Oratoribus Dialogi.** With Notes by W. BROWNRIGG SMITH M.A., F.R.G.S. 2s.

16. **Livy:** History of Rome. Notes by H. YOUNG and W. B. SMITH, M.A. Part 1. Books i., ii., 1s. 6d.

16*. ——— Part 2. Books iii., iv., v., 1s. 6d.

17. ——— Part 3. Books xxi., xxii., 1s. 6d.

19. **Latin Verse Selections,** from Catullus, Tibullus, Propertius, and Ovid. Notes by W. B. DONNE, M.A., Trinity College, Cambridge. 2s.

20. **Latin Prose Selections,** from Varro, Columella, Vitruvius, Seneca, Quintilian, Florus, Velleius Paterculus, Valerius Maximus Suetonius, Apuleius, &c. Notes by W. B. DONNE, M.A. 2s.

21. **Juvenalis Satiræ.** With Prolegomena and Notes by T. H. S. ESCOTT, B.A., Lecturer on Logic at King's College, London. 2s.

GREEK.

14. **Greek Grammar**, in accordance with the Principles and Philological Researches of the most eminent Scholars of our own day. By HANS CLAUDE HAMILTON. 1s. 6d.

15,17. **Greek Lexicon.** Containing all the Words in General Use, with their Significations, Inflections, and Doubtful Quantities. By HENRY R. HAMILTON. Vol. 1. Greek-English, 2s. 6d.; Vol. 2. English-Greek, 2s. Or the Two Vols. in One, 4s. 6d.: cloth boards, 5s.

14,15. **Greek Lexicon** (as above). Complete, with the GRAMMAR, in 17. One Vol., cloth boards, 6s.

GREEK CLASSICS. With Explanatory Notes in English.

1. **Greek Delectus.** Containing Extracts from Classical Authors, with Genealogical Vocabularies and Explanatory Notes, by H. YOUNG. New Edition, with an improved and enlarged Supplementary Vocabulary, by JOHN HUTCHISON, M.A., of the High School, Glasgow. 1s. 6d.

2, 3. **Xenophon's Anabasis**; or, The Retreat of the Ten Thousand. Notes and a Geographical Register, by H. YOUNG. Part 1. Books i. to iii., 1s. Part 2. Books iv. to vii., 1s.

4. **Lucian's Select Dialogues.** The Text carefully revised, with Grammatical and Explanatory Notes, by H. YOUNG. 1s. 6d.

5-12. **Homer**, The Works of. According to the Text of BAEUMLEIN. With Notes, Critical and Explanatory, drawn from the best and latest Authorities, with Preliminary Observations and Appendices, by T. H. L. LEARY, M.A., D.C.L.

THE ILIAD: Part 1. Books i. to vi., 1s. 6d. | Part 3. Books xiii. to xviii., 1s. 6d
Part 2. Books vii. to xii., 1s. 6d. | Part 4. Books xix. to xxiv., 1s. 6d.
THE ODYSSEY: Part 1. Books i. to vi., 1s. 6d | Part 3. Books xiii. to xviii., 1s. 6d.
Part 2. Books vii. to xii., 1s. 6d. | Part 4. Books xix. to xxiv., and Hymns, 2s.

13. **Plato's Dialogues**: The Apology of Socrates, the Crito, and the Phædo. From the Text of C. F. HERMANN. Edited with Notes, Critical and Explanatory, by the Rev. JAMES DAVIES, M.A. 2s.

14-17. **Herodotus**, The History of, chiefly after the Text of GAISFORD. With Preliminary Observations and Appendices, and Notes, Critical and Explanatory, by T. H. L. LEARY, M.A., D.C.L.
Part 1. Books i., ii. (The Clio and Euterpe), 2s.
Part 2. Books iii., iv. (The Thalia and Melpomene), 2s.
Part 3. Books v.-vii. (The Terpsichore, Erato, and Polymnia), 2s.
Part 4. Books viii., ix. (The Urania and Calliope) and Index, 1s. 6d.

18. **Sophocles**: Œdipus Tyrannus. Notes by H. YOUNG. 1s.

20. **Sophocles**: Antigone. From the Text of DINDORF. Notes, Critical and Explanatory, by the Rev. JOHN MILNER, B.A. 2s.

23. **Euripides**: Hecuba and Medea. Chiefly from the Text of DINDORF. With Notes, Critical and Explanatory, by W. BROWNRIGG SMITH, M.A., F.R.G.S. 1s. 6d.

26. **Euripides**: Alcestis. Chiefly from the Text of DINDORF. With Notes, Critical and Explanatory, by JOHN MILNER, B.A. 1s. 6d.

30. **Æschylus**: Prometheus Vinctus: The Prometheus Bound. From the Text of DINDORF. Edited, with English Notes, Critical and Explanatory, by the Rev. JAMES DAVIES, M.A. 1s.

32. **Æschylus**: Septem Contra Thebes: The Seven against Thebes. From the Text of DINDORF. Edited, with English Notes, Critical and Explanatory, by the Rev. JAMES DAVIES, M.A. 1s.

40. **Aristophanes**: Acharnians. Chiefly from the Text of C. H WEISE. With Notes, by C. S. T. TOWNSHEND, M.A. 1s. 6d.

41. **Thucydides**: History of the Peloponnesian War. Notes by H. YOUNG. Book 1. 1s. 6d.

42. **Xenophon's Panegyric on Agesilaus.** Notes and Introduction by LL. F. W. JEWITT. 1s. 6d.

43. **Demosthenes.** The Oration on the Crown and the Philippics. With English Notes. By Rev. T. H. L. LEARY, D.C.L., formerly Scholar of Brasenose College, Oxford. 1s. 6d.

7, STATIONERS' HALL COURT, LONDON, E.C.
April, 1895.

A

CATALOGUE OF BOOKS

INCLUDING NEW AND STANDARD WORKS IN

ENGINEERING: CIVIL, MECHANICAL, AND MARINE;
ELECTRICITY AND ELECTRICAL ENGINEERING;
MINING, METALLURGY; ARCHITECTURE,
BUILDING, INDUSTRIAL AND DECORATIVE ARTS;
SCIENCE, TRADE AND MANUFACTURES;
AGRICULTURE, FARMING, GARDENING;
AUCTIONEERING, VALUING AND ESTATE AGENCY;
LAW AND MISCELLANEOUS.

PUBLISHED BY

CROSBY LOCKWOOD & SON.

MECHANICAL ENGINEERING, etc.

D. K. Clark's Pocket-Book for Mechanical Engineers.

THE MECHANICAL ENGINEER'S POCKET-BOOK OF TABLES, FORMULÆ, RULES AND DATA. A Handy Book of Reference for Daily Use in Engineering Practice. By D. KINNEAR CLARK, M.Inst.C.E., Author of "Railway Machinery," "Tramways," &c. Second Edition, Revised and Enlarged. Small 8vo, 700 pages, 9s. bound in flexible leather covers, with rounded corners and gilt edges.

SUMMARY OF CONTENTS.

MATHEMATICAL TABLES.—MEASUREMENT OF SURFACES AND SOLIDS.—ENGLISH WEIGHTS AND MEASURES.—FRENCH METRIC WEIGHTS AND MEASURES.—FOREIGN WEIGHTS AND MEASURES.—MONEYS.—SPECIFIC GRAVITY WEIGHT AND VOLUME.—MANUFACTURED METALS.—STEEL PIPES.—BOLTS AND NUTS.—SUNDRY ARTICLES IN WROUGHT AND CAST IRON, COPPER, BRASS, LEAD, TIN, ZINC.—STRENGTH OF MATERIALS.—STRENGTH OF TIMBER.—STRENGTH OF CAST IRON.—STRENGTH OF WROUGHT IRON.—STRENGTH OF STEEL.—TENSILE STRENGTH OF COPPER, LEAD, ETC.—RESISTANCE OF STONES AND OTHER BUILDING MATERIALS.—RIVETED JOINTS IN BOILER PLATES.—BOILER SHELLS.—WIRE ROPES AND HEMP ROPES.—CHAINS AND CHAIN CABLES.—FRAMING.—HARDNESS OF METALS, ALLOYS AND STONES.—LABOUR OF ANIMALS.—MECHANICAL PRINCIPLES.—GRAVITY AND FALL OF BODIES.—ACCELERATING AND RETARDING FORCES.—MILL GEARING, SHAFTING, ETC.—TRANSMISSION OF MOTIVE POWER.—HEAT.—COMBUSTION: FUELS.—WARMING, VENTILATION, COOKING STOVES.—STEAM.—STEAM ENGINES AND BOILERS.—RAILWAYS.—TRAMWAYS.—STEAM SHIPS.—PUMPING STEAM ENGINES AND PUMPS.—COAL GAS, GAS ENGINES, ETC.—AIR IN MOTION.—COMPRESSED AIR.—HOT AIR ENGINES.—WATER POWER.—SPEED OF CUTTING TOOLS.—COLOURS.—ELECTRICAL ENGINEERING.

*** OPINIONS OF THE PRESS.

"Mr. Clark manifests what is an innate perception of what is likely to be useful in a pocket-book, and he is really unrivalled in the art of condensation. Very frequently we find the information on a given subject is supplied by giving a summary description of an experiment, and a statement of the results obtained. There is a very excellent steam table, occupying five and-a-half pages; and there are rules given for several calculations, which rules cannot be found in other pocket-books, as, for example, that on page 497, for getting at the quantity of water in the shape of priming in any known weight of steam. It is very difficult to hit upon any mechanical engineering subject concerning which this work supplies no information, and the excellent index at the end adds to its utility. In one word, it is an exceedingly handy and efficient tool, possessed of which the engineer will be saved many a wearisome calculation, or yet more wearisome hunt through various text-books and treatises, and, as such, we can heartily recommend it to our readers, who must not run away with the idea that Mr. Clark's Pocket-book is only Molesworth in another form. On the contrary, each contains what is not to be found in the other: and Mr. Clark takes more room and deals at more length with many subjects than Molesworth possibly could."
The Engineer.

"It would be found difficult to compress more matter within a similar compass, or produce a book of 650 pages which should be more compact or convenient for pocket reference. . . . Will be appreciated by mechanical engineers of all classes."—*Practical Engineer.*

"Just the kind of work that practical men require to have near to them."—*English Mechanic*

MR. HUTTON'S PRACTICAL HANDBOOKS.

Handbook for Works' Managers.

THE WORKS' MANAGER'S HANDBOOK OF MODERN RULES, TABLES, AND DATA. For Engineers, Millwrights, and Boiler Makers; Tool Makers, Machinists, and Metal Workers; Iron and Brass Founders, &c. By W. S. HUTTON, Civil and Mechanical Engineer, Author of "The Practical Engineer's Handbook." Fifth Edition, carefully Revised, with Additions. In One handsome Volume, medium 8vo, price 15s. strongly bound. [*Just published.*

☞ *The Author having compiled Rules and Data for his own use in a great variety of modern engineering work, and having found his notes extremely useful, decided to publish them—revised to date—believing that a practical work, suited to the* DAILY REQUIREMENTS OF MODERN ENGINEERS, *would be favourably received.*

In the Fourth Edition the First Section has been re-written and improved by the addition of numerous Illustrations and new matter relating to STEAM ENGINES *and* GAS ENGINES. *The Second Section has been enlarged and Illustrated, and throughout the book a great number of emendations and alterations have been made, with the object of rendering the book more generally useful.*

*** OPINIONS OF THE PRESS.

"The author treats every subject from the point of view of one who has collected workshop notes for application in workshop practice, rather than from the theoretical or literary aspect. The volume contains a great deal of that kind of information which is gained only by practical experience, and is seldom written in books."—*Engineer.*

"The volume is an exceedingly useful one, brimful with engineers' notes, memoranda, and rules, and well worthy of being on every mechanical engineer's bookshelf."—*Mechanical World.*

"The information is precisely that likely to be required in practice. . . . The work forms a desirable addition to the library not only of the works' manager, but of anyone connected with general engineering."—*Mining Journal.*

"A formidable mass of facts and figures, readily accessible through an elaborate index . . . . Such a volume will be found absolutely necessary as a book of reference in all sorts of 'works' connected with the metal trades."—*Ryland's Iron Trades Circular.*

"Brimful of useful information, stated in a concise form, Mr. Hutton's books have met a pressing want among engineers. The book must prove extremely useful to every practical man possessing a copy."—*Practical Engineer.*

New Manual for Practical Engineers.

THE PRACTICAL ENGINEER'S HAND-BOOK. Comprising a Treatise on Modern Engines and Boilers: Marine, Locomotive and Stationary. And containing a large collection of Rules and Practical Data relating to recent Practice in Designing and Constructing all kinds of Engines, Boilers, and other Engineering work. The whole constituting a comprehensive Key to the Board of Trade and other Examinations for Certificates of Competency in Modern Mechanical Engineering. By WALTER S. HUTTON, Civil and Mechanical Engineer, Author of "The Works' Manager's Handbook for Engineers," &c. With upwards of 370 Illustrations. Fourth Edition, Revised, with Additions. Medium 8vo, nearly 500 pp., price 18s. Strongly bound.

☞ *This work is designed as a companion to the Author's* "WORKS' MANAGER'S HAND-BOOK." *It possesses many new and original features, and contains, like its predecessor, a quantity of matter not originally intended for publication, but collected by the author for his own use in the construction of a great variety of* MODERN ENGINEERING WORK.

The information is given in a condensed and concise form, and is illustrated by upwards of 370 Woodcuts; and comprises a quantity of tabulated matter of great value to all engaged in designing, constructing, or estimating for ENGINES, BOILERS, *and* OTHER ENGINEERING WORK.

*** OPINIONS OF THE PRESS.

"We have kept it at hand for several weeks, referring to it as occasion arose, and we have not on a single occasion consulted its pages without finding the information of which we were in quest. —*Athenæum.*

"A thoroughly good practical handbook, which no engineer can go through without learning something that will be of service to him."—*Marine Engineer.*

"An excellent book of reference for engineers, and a valuable text-book for students of engineering."—*Scotsman.*

"This valuable manual embodies the results and experience of the leading authorities on mechanical engineering."—*Building News.*

"The author has collected together a surprising quantity of rules and practical data, and has shown much judgment in the selections he has made. . . . There is no doubt that this book is one of the most useful of its kind published, and will be a very popular compendium."—*Engineer.*

"A mass of information, set down in simple language, and in such a form that it can be easily referred to at any time. The matter is uniformly good and well chosen and is greatly elucidated by the illustrations. The book will find its way on to most engineers' shelves, where it will rank as one of the most useful books of reference."—*Practical Engineer.*

"Full of useful information and should be found on the office shelf of all practical engineers. —*English Mechanic.*

MR. HUTTON'S PRACTICAL HANDBOOKS—continued.

Practical Treatise on Modern Steam-Boilers.

STEAM-BOILER CONSTRUCTION. A Practical Handbook for Engineers, Boiler-Makers, and Steam Users. Containing a large Collection of Rules and Data relating to Recent Practice in the Design, Construction, and Working of all Kinds of Stationary, Locomotive, and Marine Steam-Boilers. By WALTER S. HUTTON, Civil and Mechanical Engineer, Author of "The Works' Manager's Handbook," "The Practical Engineer's Handbook," &c. With upwards of 300 Illustrations. Second Edition. Medium 8vo, 18s. cloth.

☞ *This work is issued in continuation of the Series of Handbooks written by the Author, viz*;—"THE WORKS' MANAGER'S HANDBOOK" *and* "THE PRACTICAL ENGINEER'S HANDBOOK," *which are so highly appreciated by Engineers for the practical nature of their information; and is consequently written in the same style as those works.*

The Author believes that the concentration, in a convenient form for easy reference, of such a large amount of thoroughly practical information on Steam-Boilers, will be of considerable service to those for whom it is intended, and he trusts the book may be deemed worthy of as favourable a reception as has been accorded to its predecessors.

*** OPINIONS OF THE PRESS.

"Every detail, both in boiler design and management, is clearly laid before the reader. The volume shows that boiler construction has been reduced to the condition of one of the most exact sciences; and such a book is of the utmost value to the *fin de siècle* Engineer and Works' Manager."—*Marine Engineer.*

"There has long been room for a modern handbook on steam boilers; there is not that room now, because Mr. Hutton has filled it. It is a thoroughly practical book for those who are occupied in the construction, design, selection, or use of boilers."—*Engineer.*

"The book is of so important and comprehensive a character that it must find its way into the libraries of everyone interested in boiler using or boiler manufacture if they wish to be thoroughly informed. We strongly recommend the book for the intrinsic value of its contents."—*Machinery Market.*

"The value of this book can hardly be over-estimated. The author's rules, formulæ, &c., are all very fresh, and it is impossible to turn to the work and not find what you want. No practical engineer should be without it."—*Colliery Guardian.*

Hutton's "Modernised Templeton."

THE PRACTICAL MECHANICS' WORKSHOP COMPANION. Comprising a great variety of the most useful Rules and Formulæ in Mechanical Science, with numerous Tables of Practical Data and Calculated Results for Facilitating Mechanical Operations. By WILLIAM TEMPLETON, Author of "The Engineer's Practical Assistant," &c. &c. Seventeenth Edition, Revised, Modernised, and considerably Enlarged by WALTER S. HUTTON, C.E., Author of "The Works' Manager's Handbook," "The Practical Engineer's Handbook," &c. Fcap. 8vo, nearly 500 pp., with 8 Plates and upwards of 250 Illustrative Diagrams. 6s., strongly bound for workshop or pocket wear and tear.

*** OPINIONS OF THE PRESS.

"In its modernised form Hutton's 'Templeton 'should have a wide sale, for it contains much valuable information which the mechanic will often find of use, and not a few tables and notes which he might look for in vain in other works. This modernised edition will be appreciated by all who have learned to value the original editions of 'Templeton.' "—*English Mechanic.*

"It has met with great success in the engineering workshop, as we can testify; and there are a great many men who, in a great measure, owe their rise in life to this little book."—*Building News.*

"This familiar text-book—well known to all mechanics and engineers—is of essential service to the every-day requirements of engineers, millwrights, and the various trades connected with engineering and building. The new modernised edition is worth its weight in gold."—*Building News.* (Second Notice.)

"This well-known and largely-used book contains information, brought up to date, of the sort so useful to the foreman and draughtsman. So much fresh information has been introduced as to constitute it practically a new book. It will be largely used in the office and workshop."—*Mechanical World.*

"The publishers wisely entrusted the task of revision of this popular, valuable, and useful book to Mr. Hutton, than whom a more competent man they could not have found."—*Iron.*

Templeton's Engineer's and Machinist's Assistant.

THE ENGINEER'S, MILLWRIGHT'S, and MACHINIST'S PRACTICAL ASSISTANT. A collection of Useful Tables, Rules and Data. By WILLIAM TEMPLETON. 7th Edition, with Additions. 18mo, 2s. 6d. cloth.

*** OPINIONS OF THE PRESS.

"Occupies a foremost place among books of this kind. A more suitable present to an apprentice to any of the mechanical trades could not possibly be made."—*Building News.*

"A deservedly popular work. It should be in the 'drawer' of every mechanic."—*English Mechanic.*

Foley's Office Reference Book for Mechanical Engineers.

THE MECHANICAL ENGINEER'S REFERENCE BOOK, for Machine and Boiler Construction. In Two Parts. Part I. General Engineering Data. Part II. Boiler Construction. With 51 Plates and numerous Illustrations. By Nelson Foley, M.I.N.A. Second Edition, Revised throughout and much Enlarged. Folio, £3 3s. net half-bound. [*Just published.*

Summary of Contents.

PART I.

Measures.—Circumferences and Areas, &c., Squares, Cubes, Fourth Powers.—Square and Cube Roots.—Surface of Tubes—Reciprocals.—Logarithms.—Mensuration.—Specific Gravities and Weights.—Work and Power.—Heat.—Combustion.—Expansion and Contraction.—Expansion of Gases.—Steam.—Static Forces.—Gravitation and Attraction.—Motion and Computation of Resulting Forces.—Accumulated Work.—Centre and Radius of Gyration.—Moment of Inertia.—Centre of Oscillation.—Electricity.—Strength of Materials.—Elasticity.—Test Sheets of Metals.—Friction.—Transmission of Power.—Flow of Liquids.—Flow of Gases.—Air Pumps, Surface Condensers, &c.—Speed of Steamships.—Propellers.—Cutting Tools.—Flanges.—Copper Sheets and Tubes.—Screws, Nuts, Bolt Heads, &c.—Various Recipes and Miscellaneous Matter.

With DIAGRAMS for Valve-Gear, Belting and Ropes, Discharge and Suction Pipes, Screw Propellers, and Copper Pipes.

PART II.

Treating of, Power of Boilers.—Useful Ratios.—Notes on Construction.—Cylindrical Boiler Shells.—Circular Furnaces.—Flat Plates.—Stays.—Girders.—Screws.—Hydraulic Tests.—Riveting.—Boiler Setting, Chimneys, and Mountings.—Fuels, &c.—Examples of Boilers and Speeds of Steamships.—Nominal and Normal Horse Power.

With DIAGRAMS for all Boiler Calculations and Drawings of many Varieties of Boilers.

*** Opinions of the Press.

"The book is one which every mechanical engineer may, with advantage to himself add to his library."—*Industries.*

"Mr. Foley is well fitted to compile such a work. . . . The diagrams are a great feature of the work. . . . Regarding the whole work, it may be very fairly stated that Mr. Foley has produced a volume which will undoubtedly fulfil the desire of the author and become indispensable to all mechanical engineers."—*Marine Engineer.*

"We have carefully examined this work, and pronounce it a most excellent reference book for the use of marine engineers."—*Journal of American Society of Naval Engineers.*

"A veritable monument of industry on the part of Mr. Foley, who has succeeded in producing what is simply invaluable to the engineering profession."—*Steamship.*

Coal and Speed Tables.

A POCKET BOOK OF COAL AND SPEED TABLES, for Engineers and Steam-users. By Nelson Foley, Author of "The Mechanical Engineer's Reference Book." Pocket-size, 3s. 6d. cloth.

"These tables are designed to meet the requirements of every-day use; they are of sufficient scope for most practical purposes, and may be commended to engineers and users of steam."—*Iron*

"This pocket-book well merits the attention of the practical engineer. Mr. Foley has compiled a very useful set of tables, the information contained in which is frequently required by engineess, coal consumers and users of steam."—*Iron and Coal Trades Review.*

Steam Engine.

TEXT-BOOK ON THE STEAM ENGINE. With a Supplement on Gas Engines, and Part II. on Heat Engines. By T. M. Goodeve, M.A., Barrister-at-Law. Professor of Mechanics at the Royal College of Science London; Author of "The Principles of Mechanics," "The Elements of Mechanism," &c. Twelfth Edition, Enlarged. With numerous Illustrations. Crown 8vo. 6s. cloth.

"Professor Goodeve has given us a treatise on the steam engine which will bear comparison with anything written by Huxley or Maxwell, and we can award it no higher praise."—*Engineer.*

"Mr. Goodeve's text-book is a work of which every young engineer should possess himself."—*Mining Journal.*

Gas Engines.

ON GAS-ENGINES. With Appendix describing a Recent Engine with Tube Igniter. By T. M. GOODEVE, M.A. Crown 8vo, 2s. 6d. cloth. [*Just published.*

"Like all Mr. Goodeve's writings, the present is no exception in point of general excellence. It is a valuable little volume."—*Mechanical World.*

Steam Engine Design.

A HANDBOOK ON THE STEAM ENGINE, with especial Reference to Small and Medium-sized Engines. For the Use of Engine-Makers, Mechanical Draughtsmen, Engineering Students and Users of Steam Power. By HERMAN HAEDER, C.E. English Edition, Re-edited by the Author from the Second German Edition, and Translated, with considerable Additions and Alterations, by H. H. P. POWLES, A.M I.C.E., M.I.M.E. With nearly 1,100 Illustrations. Crown 8vo, 9s. cloth

"A perfect encyclopædia of the steam engine and its details, and one which must take a permanent place in English drawing-offices and workshops."—*A Foreman Pattern-maker.*

"This is an excellent book, and should be in the hands of all who are interested in the construction and design of medium-sized stationary engines. . . . A careful study of its contents and the arrangement of the sections leads to the conclusion that there is probably no other book like it in this country. The volume aims at showing the results of practical experience, and it certainly may claim a complete achievement of this idea."—*Nature.*

"There can be no question as to its value. We cordially commend it to all concerned in the design and construction of the steam engine."—*Mechanical World.*

Steam Boilers.

A TREATISE ON STEAM BOILERS: Their Strength, Construction, and Economical Working. By ROBERT WILSON, C.E. Fifth Edition. 12mo, 6s. cloth,

"The best treatise that has ever been published on steam boilers."—*Engineer.*

"The author shows himself perfect master of his subject, and we heartily recommend all employing steam power to possess themselves of the work."—*Ryland's Iron Trade Circular.*

Boiler Chimneys.

BOILER AND FACTORY CHIMNEYS; Their Draught-Power and Stability. With a Chapter on *Lightning Conductors.* By ROBERT WILSON, A.I.C.E., Author of "A Treatise on Steam Boilers," &c. Second Edition. Crown 8vo, 3s. 6d. cloth.

"A valuable contribution to the literature of scientific building."—*The Builder.*

Boiler Making.

THE BOILER-MAKER'S READY RECKONER & ASSISTANT. With Examples of Practical Geometry and Templating, for the Use of Platers, Smiths and Riveters. By JOHN COURTNEY. Edited by D. K. CLARK, M.I.C.E. Third Edition, 480 pp., with 140 Illusts. Fcap. 8vo, 7s. half-bound.

"No workman or apprentice should be without this book."—*Iron Trade Circular.*

Locomotive Engine Development.

THE LOCOMOTIVE ENGINE AND ITS DEVELOPMENT. A Popular Treatise on the Gradual Improvements made in Railway Engines between 1803 and 1894. By CLEMENT E. STRETTON, C.E., Author of "Safe Railway Working," &c. Third Edition, Revised and Enlarged. With 95 Illustrations. Crown 8vo, 2s. 6d. cloth gilt. [*Just published.*

"Students of railway history and all who are interested in the evolution of the modern locomotive will find much to attract and entertain in this volume."—*The Times.*

"The author of this work is well known to the railway world, and no one probably has a better knowledge of the history and development of the locomotive. The volume before us should be of value to all connected with the railway system of this country."—*Nature.*

Estimating for Engineering Work, &c.

ENGINEERING ESTIMATES, COSTS AND ACCOUNTS: A Guide to Commercial Engineering. With numerous Examples of Estimates and Costs of Millwright Work, Miscellaneous Productions, Steam Engines and Steam Boilers; and a Section on the Preparation of Costs Accounts. By A GENERAL MANAGER. Demy 8vo. 12s. cloth.

"This is an excellent and very useful book, covering subject-matter in constant requisition in every factory and workshop. . . . The book is invaluable, not only to the young engineer, but also to the estimate department of every works."—*Builder.*

"We accord the work unqualified praise. The information is given in a plain, straightforward manner, and bears throughout evidence of the intimate practical acquaintance of the author with every phase of commercial engineering."—*Mechanical World.*

Fire Engineering.

FIRES, FIRE-ENGINES, AND FIRE-BRIGADES. With a History of Fire-Engines, their Construction, Use, and Management; Remarks on Fire-Proof Buildings, and the Preservation of Life from Fire: Statistics of the Fire Appliances in English Towns; Foreign Fire Systems; Hints on Fire Brigades, &c. &c. By CHARLES F. T. YOUNG, C.E. With numerous Illustrations. 544 pp., demy 8vo, £1 4s. cloth.

"To those interested in the subject of fires and fire apparatus, we most heartily commend this book. It is the only English work we now have upon the subject."—*Engineering.*

"It displays much evidence of careful research; and Mr. Young has put his facts neatly together. His acquaintance with the practical details of the construction of steam fire engines, old and new, and the conditions with which it is necessary they should comply, is accurate and full."—*Engineer.*

Boilermaking.

PLATING AND BOILERMAKING: A Practical Handbook for Workshop Operations. By a FOREMAN PATTERN-MAKER. Author of "Pattern Making," &c. 380 pages, with 338 Illustrations. Crown 8vo, 7s. 6d. cloth. [*Just published.*

"A thoroughly practical, plainly-written treatise. The volume merits commendation. The author's long experience enables him to write with full knowledge of his subject."—*Glasgow Herald.*

Engineering Construction.

PATTERN-MAKING: A Practical Treatise, embracing the Main Types of Engineering Construction, and including Gearing, both Hand and Machine made, Engine Work, Sheaves and Pulleys, Pipes and Columns, Screws, Machine Parts, Pumps and Cocks, the Moulding of Patterns in Loam and Greensand, &c., together with the methods of Estimating the weight of Castings; to which is added an Appendix of Tables for Workshop Reference. By A FOREMAN PATTERN MAKER. Second Edition, thoroughly Revised and much Enlarged. With upwards of 450 Illustrations. Crown 8vo, 7s. 6d. cloth. [*Just published.*

"A well-written technical guide, evidently written by a man who understands and has practised what he has written about. . . . We cordially recommend it to engineering students, young tourneymen, and others desirous of being initiated into the mysteries of pattern-making."—*Builder.*

"More than 450 illustrations help to explain the text, which is, however, always clear and explicit, thus rendering the work an excellent *vade mecum* for the apprentice who desires to become master of his trade."—*English Mechanic.*

Dictionary of Mechanical Engineering Terms.

LOCKWOOD'S DICTIONARY OF TERMS USED IN THE PRACTICE OF MECHANICAL ENGINEERING, embracing those current in the Drawing Office, Pattern Shop, Foundry, Fitting, Turning, Smith's and Boiler Shops, &c. &c. Comprising upwards of 6,000 Definitions. Edited by A FOREMAN PATTERN-MAKER, Author of "Pattern Making." Second Edition, Revised, with Additions. Crown 8vo. 7s. 6d. cloth.

"Just the sort of handy dictionary required by the various trades engaged in mechanical engineering. The practical engineering pupil will find the book of great value in his studies, and every foreman engineer and mechanic should have a copy."—*Building News.*

"Not merely a dictionary, but, to a certain extent, also a most valuable guide. It strikes us as a happy idea to combine with a definition of the phrase useful information on the subject of which it treats."—*Machinery Market.*

Mill Gearing.

TOOTHED GEARING: A Practical Handbook for Offices and Workshops. By A FOREMAN PATTERN MAKER, Author of "Pattern Making," "Lockwood's Dictionary of Mechanical Engineering Terms," &c. With 184 Illustrations. Crown 8vo, 6s. cloth. [*Just published.*

SUMMARY OF CONTENTS.

CHAP. I. PRINCIPLES.—II. FORMATION OF TOOTH PROFILES.—III. PROPORTIONS OF TEETH.—IV. METHODS OF MAKING TOOTH FORMS.—V. INVOLUTE TEETH.—VI. SOME SPECIAL TOOTH FORMS.—VII. BEVEL WHEELS.—VIII. SCREW GEARS.—IX. WORM GEARS.—X. HELICAL WHEELS.—XI. SKEW BEVELS.—XII. VARIABLE AND OTHER GEARS.—XIII. DIAMETRICAL PITCH.—XIV. THE ODONTOGRAPH.—XV. PATTERN GEARS.—XVI. MACHINE MOULDING GEARS.—XVII. MACHINE CUT GEARS.—XVIII. PROPORTION OF WHEELS.

"We must give the book our unqualified praise for its thoroughness of treatment, and we can heartily recommend it to all interested as the most practical book on the subject yet written."—*Mechanical World.*

Stone-working Machinery.

STONE-WORKING MACHINERY, and the Rapid and Economical Conversion of Stone. With Hints on the Arrangement and Management of Stone Works. By M. Powis Bale, M.I.M.E. With Illusts. Crown 8vo. 9s.

"The book should be in the hands of every mason or student of stone-work."—*Colliery Guardian.*

"A capital handbook for all who manipulate stone for building or ornamental purposes."—*Machinery Market.*

Pump Construction and Management.

PUMPS AND PUMPING: A Handbook for Pump Users. Being Notes on Selection, Construction and Management. By M. Powis Bale, M.I.M.E., Author of "Woodworking Machinery," "Saw Mills," &c. Second Edition, Revised. Crown 8vo, 2s. 6d. cloth.

"The matter is set forth as concisely as possible. In fact, condensation rather than diffuseness has been the author's aim throughout; yet he does not seem to have omitted anything likely to be of use."—*Journal of Gas Lighting.*

"Thoroughly practical and simply and clearly written."—*Glasgow Herald.*

Milling Machinery, etc.

MILLING MACHINES AND PROCESSES: A Practical Treatise on Shaping Metals by Rotary Cutters, including Information on Making and Grinding the Cutters. By Paul N. Hasluck, Author of "Lathework," "Handybooks for Handicrafts," &c. With upwards of 300 Engravings, including numerous Drawings by the Author. Large crown 8vo, 352 pages, 12s. 6d. cloth.

"A new departure in engineering literature. . . . We can recommend this work to all interested in milling machines; it is what it professes to be—a practical treatise."—*Engineer.*

"A capital and reliable book, which will no doubt be of considerable service, both to those who are already acquainted with the process as well as to those who contemplate its adoption."—*Industries.*

Turning.

LATHE-WORK: A Practical Treatise on the Tools, Appliances, and Processes employed in the Art of Turning. By Paul N. Hasluck. Fifth Edition, Revised and Enlarged. Cr. 8vo, 5s. cloth.

"Written by a man who knows, not only how work ought to be done, but who also knows how to do it, and how to convey his knowledge to others. To all turners this book would be valuable."—*Engineering.*

"We can safely recommend the work to young engineers. To the amateur it will simply be invaluable. To the student it will convey a great deal of useful information."—*Engineer.*

Screw-Cutting.

SCREW THREADS: And Methods of Producing Them. With Numerous Tables, and complete directions for using Screw-Cutting Lathes. By Paul N. Hasluck, Author of "Lathe-Work," &c. With Seventy-four Illustrations. Third Edition, Revised and Enlarged. Waistcoat-pocket size, 1s. 6d. cloth.

"Full of useful information, hints and practical criticism. Taps, dies and screwing-tools generally are illustrated and their action described."—*Mechanical World.*

"It is a complete compendium of all the details of the screw cutting lathe; in fact a *multum in parvo* on all the subjects it treats upon."—*Carpenter and Builder.*

Smith's Tables for Mechanics, etc.

TABLES, MEMORANDA, AND CALCULATED RESULTS, FOR MECHANICS, ENGINEERS, ARCHITECTS, BUILDERS, etc. Selected and Arranged by Francis Smith. Fifth Edition, thoroughly Revised and Enlarged, with a New Section of Electrical Tables, Formulæ, and Memoranda. Waistcoat-pocket size, 1s. 6d. limp leather.

"It would, perhaps, be as difficult to make a small pocket-book selection of notes and formulæ to suit ALL engineers as it would be to make a universal medicine; but Mr. Smith's waistcoat-pocket collection may be looked upon as a successful attempt."—*Engineer.*

"The best example we have ever seen of 270 pages of useful matter packed into the dimensions of a card-case."—*Building News.* "A veritable pocket treasury of knowledge."—*Iron.*

French-English Glossary for Engineers, etc.

A POCKET GLOSSARY of TECHNICAL TERMS: ENGLISH-FRENCH, FRENCH-ENGLISH; with Tables suitable for the Architectural, Engineering, Manufacturing and Nautical Professions. By John James Fletcher, Engineer and Surveyor. Second Edition, Revised and Enlarged, 200 pp. Waistcoat-pocket size, 1s. 6d. limp leather.

"It is a very great advantage for readers and correspondents in France and England to have so large a number of the words relating to engineering and manufacturers collected in a lilliputian volume. The little book will be useful both to students and travellers."—*Architect.*

"The glossary of terms is very complete, and many of the tables are new and well arranged. We cordially commend the book."—*Mechanical World.*

Year-Book of Engineering Formulæ, &c.

THE ENGINEER'S YEAR-BOOK FOR 1895. Comprising Formulæ, Rules, Tables, Data and Memoranda in Civil, Mechanical, Electrical, Marine and Mine Engineering. By H. R. KEMPE, A.M. Inst.C.E., M.I.E.E., Technical Officer of the Engineer-in-Chief's Office, General Post Office, London, Author of "A Handbook of Electrical Testing," "The Electrical Engineer's Pocket-Book," &c. With 750 Illustrations, specially Engraved for the work. Crown 8vo, 650 pages, 8s. leather. *[Just published.*

"Represents an enormous quantity of work, and forms a desirable book of reference."—*The Engineer.*

"The book is distinctly in advance of most similar publications in this country."—*Engineering.*

"This valuable and well-designed book of reference meets the demands of all descriptions of engineers."—*Saturday Review.*

"Teems with up-to-date information in every branch of engineering and construction."—*Building News.*

"The needs of the engineering profession could hardly be supplied in a more admirable, complete and convenient form. To say that it more than sustains all comparisons is praise of the highest sort, and that may justly be said of it."—*Mining Journal.*

"There is certainly room for the new comer, which supplies explanations and directions, as well as formulæ and tables. It deserves to become one of the most successful of the technical annuals."—*Architect.*

"Brings together with great skill all the technical information which an engineer has to use day by day. It is in every way admirably equipped, and is sure to prove successful."—*Scotsman.*

"The up-to-dateness of Mr. Kempe's compilation is a quality that will not be lost on the busy people for whom the work is intended."—*Glasgow Herald.*

Portable Engines.

THE PORTABLE ENGINE; ITS CONSTRUCTION AND MANAGEMENT. A Practical Manual for Owners and Users of Steam Engines generally. By WILLIAM DYSON WANSBROUGH. With 90 Illustrations. Crown 8vo, 3s. 6d. cloth.

"This is a work of value to those who use steam machinery. . . . Should be read by everyone who has a steam engine, on a farm or elsewhere."—*Mark Lane Express.*

"We cordially commend this work to buyers and owners of steam engines, and to those who have to do with their construction or use."—*Timber Trades Journal.*

"Such a general knowledge of the steam engine as Mr. Wansbrough furnishes to the reader should be acquired by all intelligent owners and others who use the steam engine."—*Building News.*

"An excellent text-book of this useful form of engine. 'The Hints to Purchasers' contain a good deal of commonsense and practical wisdom."—*English Mechanic.*

Iron and Steel.

"IRON AND STEEL": A Work for the Forge, Foundry, Factory, and Office. Containing ready, useful, and trustworthy Information for Iron-masters and their Stock-takers; Managers of Bar, Rail, Plate, and Sheet Rolling Mills; Iron and Metal Founders; Iron Ship and Bridge Builders; Mechanical, Mining, and Consulting Engineers; Architects, Contractors, Builders, and Professional Draughtsmen. By CHARLES HOARE, Author of "The Slide Rule," &c. Eighth Edition, Revised throughout and considerably Enlarged. 32mo. 6s. leather.

"For comprehensiveness the book has not its equal."—*Iron.*

"One of the best of the pocket books."—*English Mechanic.*

"We cordially recommend this book to those engaged in considering the details of all kinds of iron and steel works."—*Naval Science.*

Elementary Mechanics.

CONDENSED MECHANICS. A Selection of Formulæ, Rules, Tables, and Data for the Use of Engineering Students, Science Classes, &c. In Accordance with the Requirements of the Science and Art Department. By W. G. CRAWFORD HUGHES, A.M.I.C.E. Crown 8vo, 2s. 6d. cloth.

"The book is well fitted for those who are either confronted with practical problems in their work, or are preparing for examination and wish to refresh their knowledge by going through their formulæ again."—*Marine Engineer.*

"It is well arranged, and meets the wants of those for whom it is intended."—*Railway News.*

Steam.

THE SAFE USE OF STEAM. Containing Rules for Unprofessional Steam-users. By an ENGINEER. Sixth Edition. Sewed, 6d.

"If steam-users would but learn this little book by heart, boiler explosions would become sensations by their rarity."—*English Mechanic.*

Warming.

HEATING BY HOT WATER; with Information and Suggestions on the best Methods of Heating Public, Private and Horticultural Buildings. By WALTER JONES. Second Edition. With 96 Illustrations. Crown 8vo, 2s. 6d. *net.*

"We confidently recommend all interested in heating by hot water to secure a copy of this valuable little treatise."—*The Plumber and Decorator.*

THE POPULAR WORKS OF MICHAEL REYNOLDS

("THE ENGINE DRIVER'S FRIEND").

Locomotive-Engine Driving.

LOCOMOTIVE-ENGINE DRIVING: A Practical Manual for Engineers in charge of Locomotive Engines. By MICHAEL REYNOLDS, Member of the Society of Engineers, formerly Locomotive Inspector L. B. and S. C. R. Ninth Edition. Including a KEY TO THE LOCOMOTIVE ENGINE. With Illustrations and Portrait of Author. Crown 8vo, 4s. 6d. cloth.

"Mr. Reynolds has supplied a want, and has supplied it well. We can confidently recommend the book, not only to the practical driver, but to everyone who takes an interest in the performance of locomotive engines."—*The Engineer.*

"Mr. Reynolds has opened a new chapter in the literature of the day. Of the practical utility of this admirable treatise, we have to speak in terms of warm commendation."—*Athenæum.*

"Evidently the work of one who knows his subject thoroughly. . . . *Railway Service Gazette.*

"Were the cautions and rules given in the book to become part of the every-day working of our engine-drivers, we might have fewer distressing accidents to deplore."—*Scotsman.*

Stationary Engine Driving.

STATIONARY ENGINE DRIVING: A Practical Manual for Engineers in charge of Stationary Engines. By MICHAEL REYNOLDS. Fifth Edition, Enlarged. With Plates and Woodcuts. Crown 8vo, 4s. 6d. cloth.

"The author is thoroughly acquainted with his subjects, and his advice on the various points treated is clear and practical. . . . He has produced a manual which is an exceedingly useful one for the class for whom it is specially intended."—*Engineering.*

"Our author leaves no stone unturned. He is determined that his readers shall not only know something about the stationary engine, but all about it."—*Engineer.*

"An engineman who has mastered the contents of Mr. Reynolds's book will require but little actual experience with boilers and engines before he can be trusted to look after them."—*English Mechanic.*

The Engineer, Fireman, and Engine-Boy.

THE MODEL LOCOMOTIVE ENGINEER, FIREMAN, and ENGINE-BOY. Comprising a Historical Notice of the Pioneer Locomotive Engines and their Inventors. By MICHAEL REYNOLDS. Second Edition, with Revised Appendix. With numerous Illustrations and Portrait of George Stephenson. Crown 8vo, 4s. 6d. cloth. [*Just published.*

"From the technical knowledge of the author it will appeal to the railway man of to-day more forcibly than anything written by Dr. Smiles. . . . The volume contains information of a technical kind, and facts that every driver should be familiar with."—*English Mechanic.*

"We should be glad to see this book in the possession of everyone in the kingdom who has ever laid, or is to lay, hands on a locomotive engine."—*Iron.*

Continuous Railway Brakes.

CONTINUOUS RAILWAY BRAKES: A Practical Treatise on the several Systems in Use in the United Kingdom; their Construction and Performance. With copious Illustrations and numerous Tables. By MICHAEL REYNOLDS. Large crown 8vo, 9s. cloth.

"A popular explanation of the different brakes. It will be of great assistance in forming public opinion, and will be studied with benefit by those who take an interest in the brake."—*English Mechanic.*

"Written with sufficient technical detail to enable the principle and relative connection of the various parts of each particular brake to be readily grasped."—*Mechanical World.*

Engine-Driving Life.

ENGINE-DRIVING LIFE: Stirring Adventures and Incidents in the Lives of Locomotive-Engine Drivers. By MICHAEL REYNOLDS. Third and Cheaper Edition. Crown 8vo, 1s. 6d. cloth. [*Just published.*

"From first to last perfectly fascinating. Wilkie Collins's most thrilling conceptions are thrown into the shade by true incidents, endless in their variety, related in every page."—*North British Mail.*

"Anyone who wishes to get a real insight into railway life cannot do better than read 'Engine-Driving Life' for himself; and if he once take it up he will find that the author's enthusiasm and real love of the engine-driving profession will carry him on till he has read every page."—*Saturday Review.*

Pocket Companion for Enginemen.

THE ENGINEMAN'S POCKET COMPANION AND PRACTICAL EDUCATOR FOR ENGINEMEN, BOILER ATTENDANTS, AND MECHANICS. By MICHAEL REYNOLDS. With Forty-five Illustrations and numerous Diagrams. Third Edition, Revised. Royal 18mo, 3s. 6d., strongly bound for pocket wear.

"This admirable work is well suited to accomplish its object, being the honest workmanship of a competent engineer."—*Glasgow Herald.*

"A most meritorious work, giving in a succinct and practical form all the information an engine-minder desirous of mastering the scientific principles of his daily calling would require."—*The Miller.*

"A boon to those who are striving to become efficient mechanics."—*Daily Chronicle.*

CIVIL ENGINEERING, SURVEYING, etc.

MR. HUMBER'S VALUABLE ENGINEERING BOOKS.

The Water Supply of Cities and Towns.

A COMPREHENSIVE TREATISE on the WATER-SUPPLY OF CITIES AND TOWNS. By WILLIAM HUMBER, A-M.Inst.C.E., and M. Inst. M.E., Author of "Cast and Wrought Iron Bridge Construction," &c. &c. Illustrated with 50 Double Plates, 1 Single Plate, Coloured Frontispiece, and upwards of 250 Woodcuts, and containing 400 pages of Text. Imp. 4to, £6 6s. elegantly and substantially half-bound in morocco.

List of Contents.

I. Historical Sketch of some of the means that have been adopted for the Supply of Water to Cities and Towns.—II. Water and the Foreign Matter usually associated with it.—III. Rainfall and Evaporation.—IV. Springs and the water-bearing formations of various districts.—V. Measurement and Estimation of the flow of Water.—VI. On the Selection of the Source of Supply.—VII. Wells.—VIII. Reservoirs.—IX. The Purification of Water.—X. Pumps.—XI. Pumping Machinery.—XII. Conduits.—XIII. Distribution of Water.—XIV. Meters, Service Pipes, and House Fittings.—XV. The Law and Economy of Water Works.—XVI. Constant and Intermittent Supply.—XVII. Description of Plates.—Appendices, giving Tables of Rates of Supply, Velocities, &c. &c., together with Specifications of several Works illustrated, among which will be found: Aberdeen, Bideford, Canterbury, Dundee, Halifax, Lambeth, Rotherham, Dublin, and others.

"The most systematic and valuable work upon water supply hitherto produced in English, or in any other language. . . . Mr. Humber's work is characterised almost throughout by an exhaustiveness much more distinctive of French and German than of English technical treatises." —*Engineer.*

"We can congratulate Mr. Humber on having been able to give so large an amount of information on a subject so important as the water supply of cities and towns. The plates, fifty in number, are mostly drawings of executed works, and alone would have commanded the attention of every engineer whose practice may lie in this branch of the profession."—*Builder.*

Cast and Wrought Iron Bridge Construction.

A COMPLETE AND PRACTICAL TREATISE ON CAST AND WROUGHT IRON BRIDGE CONSTRUCTION, including Iron Foundations. In Three Parts—Theoretical, Practical, and Descriptive. By WILLIAM HUMBER, A.M.Inst.C.E., and M.Inst.M.E. Third Edition, Revised and much improved, with 115 Double Plates (20 of which now first appear in this edition), and numerous Additions to the Text. In Two Vols., imp. 4to, £6 16s. 6d. half-bound in morocco.

"A very valuable contribution to the standard literature of civil engineering. In addition to elevations, plans and sections, large scale details are given which very much enhance the instructive worth of those illustrations."—*Civil Engineer and Architect's Journal.*

"Mr. Humber's stately volumes, lately issued—in which the most important bridges erected during the last five years, under the direction of the late Mr. Brunel, Sir W. Cubitt, Mr. Hawkshaw, Mr. Page, Mr. Fowler, Mr. Hemans, and others among our most eminent engineers, are drawn and specified in great detail."—*Engineer.*

Strains, Calculation of.

A HANDY BOOK FOR THE CALCULATION OF STRAINS IN GIRDERS AND SIMILAR STRUCTURES, AND THEIR STRENGTH. Consisting of Formulæ and Corresponding Diagrams, with numerous details for Practical Application, &c. By WILLIAM HUMBER, A-M.Inst.C.E., &c. Fifth Edition. Crown 8vo, nearly 100 Woodcuts and 3 Plates, 7s. 6d. cloth.

"The formulæ are neatly expressed, and the diagrams good."—*Athenæum.*

"We heartily commend this really *handy* book to our engineer and architect readers."—*English Mechanic.*

Barlow's Strength of Materials, enlarged by Humber.

A TREATISE ON THE STRENGTH OF MATERIALS; with Rules for Application in Architecture, the Construction of Suspension Bridges, Railways, &c. By PETER BARLOW, F.R.S. A New Edition, Revised by his Sons, P. W. BARLOW, F.R.S., and W. H. BARLOW, F.R.S.; to which are added, Experiments by HODGKINSON, FAIRBAIRN, and KIRKALDY; and Formulæ for Calculating Girders, &c. Arranged and Edited by WM. HUMBER, A-M.Inst.C.E. Demy 8vo, 400 pp., with 19 large Plates and numerous Woodcuts, 18s. cloth.

"Valuable alike to the student, tyro, and the experienced practitioner, it will always rank in future, as it has hitherto done, as the standard treatise on that particular subject."—*Engineer.*

"There is no greater authority than Barlow."—*Building News.*

"As a scientific work of the first class, it deserves a foremost place on the bookshelves of every civil engineer and practical mechanic."—*English Mechanic.*

MR. HUMBER'S GREAT WORK ON MODERN ENGINEERING.

Complete in Four Volumes, imperial 4to, price £12 12s., half-morocco. Each Volume sold separately as follows:—

A RECORD OF THE PROGRESS OF MODERN ENGINEERING.

FIRST SERIES. Comprising Civil, Mechanical, Marine, Hydraulic, Railway, Bridge, and other Engineering Works, &c. By WILLIAM HUMBER, A.M.Inst.C.E., &c. Imp. 4to, with 36 Double Plates, drawn to a large scale, Photographic Portrait of John Hawkshaw, C.E., F.R.S., &c., and copious descriptive Letterpress, Specifications, &c., £3 3s. half-morocco.

List of the Plates and Diagrams.

Victoria Station and Roof, L. B. & S. C. R. (8 plates); Southport Pier (2 plates); Victoria Station and Roof, L. C. & D. and G. W. R. (6 plates); Roof of Cremorne Music Hall; Bridge over G. N. Railway; Roof of Station, Dutch Rhenish Rail (2 plates); Bridge over the Thames, West London Extension Railway (5 plates); Armour Plates: Suspension Bridge, Thames (4 plates); The Allen Engine; Suspension Bridge, Avon (3 plates); Underground Railway (3 plates).

"Handsomely lithographed and printed. It will find favour with many who desire to preserve in a permanent form copies of the plans and specifications prepared for the guidance of the contractors for many important engineering works."—*Engineer.*

HUMBER'S PROGRESS OF MODERN ENGINEERING.

SECOND SERIES. Imp. 4to, with 36 Double Plates, Photographic Portrait of Robert Stephenson, C.E., M.P., F.R.S., &c., and copious descriptive Letterpress, Specifications, &c., £3 3s. half-morocco.

List of the Plates and Diagrams.

Birkenhead Docks, Low Water Basin (15 plates); Charing Cross Station Roof, C. C. Railway (3 plates); Digswell Viaduct, Great Northern Railway; Robbery Wood Viaduct, Great Northern Railway; Iron Permanent Way; Clydach Viaduct, Merthyr, Tredegar, and Abergavenny Railway; Ebbw Viaduct, Merthyr, Tredegar, and Abergavenny Railway; College Wood Viaduct, Cornwall Railway; Dublin Winter Palace Roof (3 plates); Bridge over the Thames, L. C. & D. Railway (6 plates); Albert Harbour, Greenock (4 plates).

"Mr. Humber has done the profession good and true service, by the fine collection of examples he has here brought before the profession and the public."—*Practical Mechanic's Journal.*

HUMBER'S PROGRESS OF MODERN ENGINEERING.

THIRD SERIES. Imp. 4to, with 40 Double Plates, Photographic Portrait of J. R. M'Clean, late Pres. Inst. C.E., and copious descriptive Letterpress, Specifications, &c., £3 3s. half-morocco.

List of the Plates and Diagrams.

MAIN DRAINAGE, METROPOLIS.—*North Side.*—Map showing Interception of Sewers; Middle Level Sewer (2 plates); Outfall Sewer, Bridge over River Lea (3 plates); Outfall Sewer, Bridge over Marsh Lane, North Woolwich Railway, and Bow and Barking Railway Junction; Outfall Sewer, Bridge over Bow and Barking Railway (3 plates); Outfall Sewer, Bridge over East London Waterworks' Feeder (2 plates); Outfall Sewer, Reservoir (2 plates); Outfall Sewer, Tumbling Bay and Outlet; Outfall Sewer, Penstocks. *South Side.*—Outfall Sewer, Bermondsey Branch (2 plates); Outfall Sewer, Reservoir and Outlet (4 plates); Outfall Sewer, Filth Hoist; Sections of Sewers (North and South Sides).

THAMES EMBANKMENT.—Section of River Wall; Steamboat Pier, Westminster (2 plates); Landing Stairs between Charing Cross and Waterloo Bridges; York Gate (2 plates); Overflow and Outlet at Savoy Street Sewer (3 plates); Steamboat Pier, Waterloo Bridge (3 plates); Junction of Sewers, Plans and Sections Gullies, Plans and Sections; Rolling Stock; Granite and Iron Forts.

"The drawings have a constantly increasing value, and whoever desires to possess clear representations of the two great works carried out by our Metropolitan Board will obtain Mr. Humber's volume."—*Engineer.*

HUMBER'S PROGRESS OF MODERN ENGINEERING.

FOURTH SERIES. Imp. 4to, with 36 Double Plates, Photographic Portrait of John Fowler, late Pres. Inst. C.E., and copious descriptive Letterpress, Specifications, &c., £3 3s. half-morocco.

List of the Plates and Diagrams.

Abbey Mills Pumping Station, Main Drainage, Metropolis (4 plates); Barrow Docks (5 plates); Manquis Viaduct, Santiago and Valparaiso Railway (2 plates); Adam's Locomotive, St. Helen's Canal Railway (2 plates); Cannon Street Station Roof, Charing Cross Railway (3 plates); Road Bridge over the River Moka (2 plates); Telegraphic Apparatus for Mesopotamia; Viaduct over the River Wye, Midland Railway (3 plates); St. Germans Viaduct, Cornwall Railway (2 plates); Wrought-Iron Cylinder for Diving Bell; Millwall Docks (6 plates); Milroy's Patent Excavator; Metropolitan District Railway (6 plates); Harbours, Ports, and Breakwaters (3 plates).

"We gladly welcome another year's issue of this valuable publication from the able pen of Mr. Humber. The accuracy and general excellence of this work are well known, while its useful mess in giving the measurements and details of some of the latest examples of engineering, as carried out by the most eminent men in the profession, cannot be too highly prized."—*Artizan.*

Statics, Graphic and Analytic.

GRAPHIC AND ANALYTIC STATICS, in their Practical Application to the Treatment of Stresses in Roofs, Solid Girders, Lattice, Bowstring and Suspension Bridges, Braced Iron Arches and Piers, and other Frameworks. By R. HUDSON GRAHAM, C.E. Containing Diagrams and Plates to Scale. With numerous Examples, many taken from existing Structures. Specially arranged for Class-work in Colleges and Universities. Second Edition, Revised and Enlarged. 8vo, 16s. cloth.

"Mr. Graham's book will find a place wherever graphic and analytic statics are used or studied."—*Engineer.*

"The work is excellent from a practical point of view, and has evidently been prepared with much care. The directions for working are ample, and are illustrated by an abundance of well-selected examples. It is an excellent text-book for the practical draughtsman."—*Athenæum.*

Practical Mathematics.

MATHEMATICS FOR PRACTICAL MEN: Being a Commonplace Book of Pure and Mixed Mathematics. Designed chiefly for the use of Civil Engineers, Architects and Surveyors. By OLINTHUS GREGORY, LL.D., F.R.A.S., Enlarged by HENRY LAW, C.E. 4th Edition, carefully Revised by J. R. YOUNG, formerly Professor of Mathematics, Belfast College. With 13 Plates. 8vo, £1 1s. cloth.

"The engineer or architect will here find ready to his hand rules for solving nearly every mathematical difficulty that may arise in his practice. The rules are in all cases explained by means of examples, in which every step of the process is clearly worked out."—*Builder.*

"One of the most serviceable books for practical mechanics. . . . It is an instructive book for the student, and a text-book for him who, having once mastered the subjects it treats of, needs occasionally to refresh his memory upon them."—*Building News.*

Hydraulic Tables.

HYDRAULIC TABLES, CO-EFFICIENTS, and FORMULÆ for finding the Discharge of Water from Orifices, Notches, Weirs, Pipes, and Rivers. With New Formulæ, Tables, and General Information on Rainfall, Catchment-Basins, Drainage, Sewerage, Water Supply for Towns and Mill Power. By JOHN NEVILLE, Civil Engineer, M.R.I.A. Third Ed., carefully Revised, with considerable Additions. Numerous Illusts. Cr. 8vo, 14s. cloth.

"Alike valuable to students and engineers in practice; its study will prevent the annoyance of avoidable failures, and assist them to select the readiest means of successfully carrying out any given work connected with hydraulic engineering."—*Mining Journal.*

"It is, of all English books on the subject, the one nearest to completeness. . . . From the good arrangement of the matter, the clear explanations, and abundance of formulæ, the carefully calculated tables, and, above all, the thorough acquaintance with both theory and construction which is displayed from first to last, the book will be found to be an acquisition."—*Architect.*

Hydraulics.

HYDRAULIC MANUAL. Consisting of Working Tables and Explanatory Text. Intended as a Guide in Hydraulic Calculations and Field Operations. By LOWIS D'A. JACKSON, Author of "Aid to Survey Practice," "Modern Metrology," &c. Fourth Edition, Enlarged. Large cr. 8vo, 16s. cl.

"The author has had a wide experience in hydraulic engineering and has been a careful observer of the facts which have come under his notice, and from the great mass of material at his command he has constructed a manual which may be accepted as a trustworthy guide to this branch of the engineer's profession. We can heartily recommend this volume to all who desire to be acquainted with the latest development of this important subject."—*Engineering.*

"The standard-work in this department of mechanics."—*Scotsman.*

"The most useful feature of this work is its freedom from what is superannuated, and its thorough adoption of recent experiments: the text is, in fact, in great part a short account of the great modern experiments."—*Nature.*

Drainage.

ON THE DRAINAGE OF LANDS, TOWNS, AND BUILDINGS. By G. D. DEMPSEY, C.E., Author of "The Practical Railway Engineer," &c. Revised, with large Additions on RECENT PRACTICE IN DRAINAGE ENGINEERING, by D. KINNEAR CLARK, M.Inst.C.E. Author of "Tramways: Their Construction and Working," "A Manual of Rules, Tables, and Data for Mechanical Engineers," &c. Second Edition, Corrected. Fcap. 8vo, 5s. cloth.

"The new matter added to Mr. Dempsey's excellent work is characterised by the comprehensive grasp and accuracy of detail for which the name of Mr. D. K. Clark is a sufficient voucher."—*Athenæum.*

"As a work on recent practice in drainage engineering, the book is to be commended to all who are making that branch of engineering science their special study."—*Iron.*

"A comprehensive manual on drainage engineering, and a useful introduction to the student."—*Building News.*

Water Storage, Conveyance, and Utilisation.

WATER ENGINEERING: A Practical Treatise on the Measurement, Storage, Conveyance, and Utilisation of Water for the Supply of Towns, for Mill Power, and for other Purposes. By CHARLES SLAGG, A.M.Inst.C.E., Author of "Sanitary Work in the Smaller Towns, and in Villages," &c. Second Edition. With numerous Illustrations. Crown 8vo, 7s. 6d. cloth

"As a small practical treatise on the water supply of towns, and on some applications of water-power, the work is in many respects excellent."—*Engineering.*

"The author has collated the results deduced from the experiments of the most eminent authorities, and has presented them in a compact and practical form, accompanied by very clear and detailed explanations. . . . The application of water as a motive power is treated very carefully and exhaustively."—*Builder.*

"For anyone who desires to begin the study of hydraulics with a consideration of the practical applications of the science there is no better guide."—*Architect.*

River Engineering.

RIVER BARS: The Causes of their Formation, and their Treatment by "Induced Tidal Scour;" with a Description of the Successful Reduction by this Method of the Bar at Dublin By I. J. MANN, Assist. Eng. to the Dublin Port and Docks Board. Royal 8vo, 7s. 6d. cloth.

"We recommend all interested in harbour works—and, indeed, those concerned in the improvements of rivers generally—to read Mr. Mann's interesting work on the treatment of river bars."—*Engineer.*

Trusses.

TRUSSES OF WOOD AND IRON. Practical Applications of Science in Determining the Stresses, Breaking Weights, Safe Loads, Scantlings, and Details of Construction, with Complete Working Drawings. By WILLIAM GRIFFITHS, Surveyor, Assistant Master, Tranmere School of Science and Art. Oblong 8vo, 4s. 6d. cloth.

"This handy little book enters so minutely into every detail connected with the construction of roof trusses, that no student need be ignorant of these matters."—*Practical Engineer.*

Railway Working.

SAFE RAILWAY WORKING. A Treatise on Railway Accidents: Their Cause and Prevention; with a Description of Modern Appliances and Systems. By CLEMENT E. STRETTON, C.E., Vice-President and Consulting Engineer, Amalgamated Society of Railway Servants. With Illustrations and Coloured Plates. Third Edition, Enlarged. Crown 8vo, 3s. 6d cloth.

"A book for the engineer, the directors, the managers; and, in short, all who wish for information on railway matters will find a perfect encyclopædia in 'Safe Railway Working.'"—*Railway Review.*

"We commend the remarks on railway signalling to all railway managers, especially where a uniform code and practice is advocated."—*Herepath's Railway Journal.*

"The author may be congratulated on having collected, in a very convenient form, much valuable information on the principal questions affecting the safe working of railways."—*Railway Engineer.*

Oblique Bridges.

A PRACTICAL AND THEORETICAL ESSAY ON OBLIQUE BRIDGES. With 13 large Plates. By the late GEORGE WATSON BUCK, M.I.C.E. Fourth Edition, revised by his Son, J. H. WATSON BUCK, M.I.C.E.; and with the addition of Description to Diagrams for Facilitating the Construction of Oblique Bridges, by W. H. BARLOW, M.I.C.E. Royal 8vo, 12s. cloth.

"The standard text-book for all engineers regarding skew arches is Mr. Buck's treatise, and it would be impossible to consult a better."—*Engineer.*

"Mr. Buck's treatise is recognised as a standard text-book, and his treatment has divested the subject of many of the intricacies supposed to belong to it. As a guide to the engineer and architect, on a confessedly difficult subject, Mr. Buck's work is unsurpassed."—*Building News.*

Tunnel Shafts.

THE CONSTRUCTION OF LARGE TUNNEL SHAFTS: A Practical and Theoretical Essay. By J. H. WATSON BUCK, M.Inst.C.E., Resident Engineer, London and North-Western Railway. Illustrated with Folding Plates. Royal 8vo, 12s. cloth.

"Many of the methods given are of extreme practical value to the mason; and the observations on the form of arch, the rules for ordering the stone, and the construction of the templates will be found of considerable use. We commend the book to the engineering profession."—*Building News*

"Will be regarded by civil engineers as of the utmost value, and calculated to save much time and obviate many mistakes."—*Colliery Guardian.*

Student's Text-Book on Surveying.

PRACTICAL SURVEYING: A Text-Book for Students preparing for Examination or for Survey-work in the Colonies. By GEORGE W. USILL, A.M.I.C.E., Author of "The Statistics of the Water Supply of Great Britain." With Four Lithographic Plates and upwards of 330 Illustrations. Third Edition, Revised and Enlarged. Including Tables of Natural Sines, Tangents, Secants, &c. Crown 8vo, 7s. 6d. cloth; or, on THIN PAPER, bound in limp leather, gilt edges, rounded corners, for pocket use, 12s. 6d.

"The best forms of instruments are described as to their construction, uses and modes of employment, and there are innumerable hints on work and equipment such as the author, in his experience as surveyor, draughtsman, and teacher, has found necessary, and which the student in his inexperience will find most serviceable."—*Engineer.*

"The latest treatise in the English language on surveying, and we have no hesitation in saying that the student will find it a better guide than any of its predecessors . . . . . Deserves to be recognised as the first book which should be put in the hands of a pupil of Civil Engineering, and every gentleman of education who sets out for the Colonies would find it well to have a copy."—*Architect.*

Survey Practice.

AID TO SURVEY PRACTICE, for Reference in Surveying, Levelling, and Setting-out: and in Route Surveys of Travellers by Land and Sea. With Tables, Illustrations, and Records. By LOWIS D'A. JACKSON, A.M.I.C.E., Author of "Hydraulic Manual," "Modern Metrology," &c. Second Edition, Enlarged. Large crown 8vo, 12s. 6d. cloth.

"A valuable *vade-mecum* for the surveyor. We can recommend this book as containing an admirable supplement to the teaching of the accomplished surveyor."—*Athenæum.*

"As a text-book we should advise all surveyors to place it in their libraries, and study well the matured instructions afforded in its pages."—*Colliery Guardian.*

"The author brings to his work a fortunate union of theory and practical experience which, aided by a clear and lucid style of writing, renders the book a very useful one."—*Builder.*

Surveying, Land and Marine.

LAND AND MARINE SURVEYING, in Reference to the Preparation of Plans for Roads and Railways; Canals, Rivers, Towns' Water Supplies; Docks and Harbours. With Description and Use of Surveying Instruments. By W. D. HASKOLL, C.E., Author of "Bridge and Viaduct Construction," &c. Second Edition, Revised, with Additions. Large cr. 8vo, 9s. cl.

"This book must prove of great value to the student. We have no hesitation in recommending it, feeling assured that it will more than repay a careful study."—*Mechanical World.*

"A most useful and well arranged book. We can strongly recommend it as a carefully-written and valuable text-book. It enjoys a well-deserved repute among surveyors."—*Builder.*

"This volume cannot fail to prove of the utmost practical utility. It may be safely recommended to all students who aspire to become clean and expert surveyors."—*Mining Journal.*

Field-Book for Engineers.

THE ENGINEER'S, MINING SURVEYOR'S, AND CONTRACTOR'S FIELD-BOOK. Consisting of a Series of Tables, with Rules, Explanations of Systems, and use of Theodolite for Traverse Surveying and Plotting the Work with minute accuracy by means of Straight Edge and Set Square only; Levelling with the Theodolite, Casting-out and Reducing Levels to Datum, and Plotting Sections in the ordinary manner; setting-out Curves with the Theodolite by Tangential Angles and Multiples, with Right and Left-hand Readings of the Instrument: Setting-out Curves without Theodolite, on the System of Tangential Angles by sets of Tangents and Offsets; and Earthwork Tables to 80 feet deep, calculated for every 6 inches in depth. By W. D. HASKOLL, C.E. Fourth Edition. Crown 8vo, 12s. cloth.

"The book is very handy; the separate tables of sines and tangents to every minute will make it useful for many other purposes, the genuine traverse tables existing all the same."—*Athenæum.*

"Every person engaged in engineering field operations will estimate the importance of such a work and the amount of valuable time which will be saved by reference to a set of reliable tables prepared with the accuracy and fulness of those given in this volume."—*Railway News.*

Levelling.

A TREATISE ON THE PRINCIPLES AND PRACTICE OF LEVELLING. Showing its Application to purposes of Railway and Civil Engineering, in the Construction of Roads; with Mr. TELFORD'S Rules for the same. By FREDERICK W. SIMMS, F.G.S., M.Inst.C.E. Seventh Edition, with the addition of LAW'S Practical Examples for Setting-out Railway Curves, and TRAUTWINE'S Field Practice of Laying-out Circular Curves. With 7 Plates and numerous Woodcuts. 8vo, 8s. 6d. cloth. **** TRAUTWINE on Curves may be had separate, 5s.

"The text-book on levelling in most of our engineering schools and colleges."—*Engineer*

"The publishers have rendered a substantial service to the profession, especially to the younger members, by bringing out the present edition of Mr. Simms's useful book"—*Engineer.*

Trigonometrical Surveying.

AN OUTLINE OF THE METHOD OF CONDUCTING A TRIGONOMETRICAL SURVEY, for the Formation of Geographical and Topographical Maps and Plans, Military Reconnaissance, Levelling, &c., with Useful Problems, Formulæ, and Tables. By Lieut.-General FROME, R.E. Fourth Edition, Revised and partly Re-written by Major General Sir CHARLES WARREN, G.C.M.G., R.E. With 19 Plates and 115 Woodcuts. Royal 8vo. 16s. cloth.

"The simple fact that a fourth edition has been called for is the best testimony to its merits. No words of praise from us can strengthen the position so well and so steadily maintained by this work. Sir Charles Warren has revised the entire work, and made such additions as were necessary to bring every portion of the contents up to the present date."—*Broad Arrow*.

Field Fortification.

A TREATISE ON FIELD FORTIFICATION, THE ATTACK OF FORTRESSES, MILITARY MINING, AND RECONNOITRING. By Colonel I. S. MACAULAY, late Professor of Fortification in the R.M.A., Woolwich. Sixth Edition. Crown 8vo, with separate Atlas of 12 Plates, 12s. cloth.

Tunnelling.

PRACTICAL TUNNELLING. Explaining in detail the Setting-out of the works, Shaft-sinking and Heading-driving, Ranging the Lines and Levelling underground, Sub-Excavating, Timbering, and the Construction of the Brickwork of Tunnels, with the amount of Labour required for, and the Cost of, the various portions of the work. By FREDERICK W. SIMMS, F.G.S., M.Inst.C.E. Third Edition, Revised and Extended by D. KINNEAR CLARK, M.Inst.C.E. Imperial 8vo, with 21 Folding Plates and numerous Wood Engravings, 30s. cloth.

"The estimation in which Mr. Simms's book on tunnelling has been held for over thirty years cannot be more truly expressed than in the words of the late Prof. Rankine:—'The best source of information or the subject of tunnels is Mr. F. W. Simms's work on Practical Tunnelling.'"—*Architect*.

"It has been regarded from the first as a text-book of the subject. . . . Mr. Clark has added immensely to the value of the book."—*Engineer*.

Tramways and their Working.

TRAMWAYS: THEIR CONSTRUCTION AND WORKING. Embracing a Comprehensive History of the System; with an exhaustive Analysis of the various Modes of Traction, including Horse-Power, Steam, Cable Traction, Electric Traction, &c.; a Description of the Varieties of Rolling Stock; and ample Details of Cost and Working Expenses. New Edition, Thoroughly Revised, and Including the Progress recently made in Tramway Construction, &c. &c. By D. KINNEAR CLARK. M.Inst.C.E. With numerous Illustrations and Folding Plates. In One Volume, 8vo, 780 pages, price 28s., bound in buckram. [*Just published.*

"All interested in tramways must refer to it, as all railway engineers have turned to the author's work 'Railway Machinery.'"—*Engineer*.

"An exhaustive and practical work on tramways, in which the history of this kind of locomotion, and a description and cost of the various modes of laying tramways, are to be found."—*Building News*.

"The best form of rails, the best mode of construction, and the best mechanical appliances are so fairly indicated in the work under review, that any engineer about to construct a tramway will be enabled at once to obtain the practical information which will be of most service to him."—*Athenæum*.

Curves, Tables for Setting-out.

TABLES OF TANGENTIAL ANGLES AND MULTIPLES for Setting-out Curves from 5 to 200 Radius. By ALEXANDER BEAZELEY, M.Inst.C.E. Fourth Edition. Printed on 48 Cards, and sold in a cloth box, waistcoat-pocket size, 3s. 6d.

"Each table is printed on a small card, which, being placed on the theodolite, leaves the hands free to manipulate the instrument—no small advantage as regards the rapidity of work."—*Engineer*.

"Very handy: a man may know that all his day's work must fall on two of these cards, which he puts into his own card-case, and leaves the rest behind."—*Athenæum*.

Earthwork.

EARTHWORK TABLES. Showing the Contents in Cubic Yards of Embankments, Cuttings, &c., of Heights or Depths up to an average of 80 feet. By JOSEPH BROADBENT, C.E., and FRANCIS CAMPIN, C.E. Crown 8vo, 5s. cloth.

"The way in which accuracy is attained, by a simple division of each cross section into three elements, two in which are constant and one variable, is ingenious."—*Athenæum*.

Water Supply and Water-Works.

THE WATER SUPPLY OF TOWNS AND THE CONSTRUCTION OF WATER-WORKS: A Practical Treatise for the Use of Engineers and Students of Engineering. By W. K. BURTON, A.M.Inst C.E., Professor of Sanitary Engineering in the Imperial University, Tokyo, Japan, and Consulting Engineer to the Tokyo Water-works. With an Appendix on **the Effects of Earthquakes on Water-works**, by JOHN MILNE, F.R.S., Professor of Mining in the Imperial University of Japan. With numerous Plates and Illustrations. Super-royal 8vo, 25s. buckram. [*Just published.*

"The whole art of waterworks construction is dealt with in a clear and comprehensive fashion in this handsome volume. . . . Mr. Burton's practical treatise shows in all its sections the fruit of independent study and individual experience. It is largely based upon his own practice in the branch of engineering of which it treats, and with such a basis a treatise can scarcely fail to be suggestive and useful."—*Saturday Review.*

"Professor Burton's book is sure of a warm welcome among engineers. It is written in clear and vigorous language and forms an exhaustive treatise on a branch of engineering the claims of which it would be difficult to over-estimate."—*Scotsman.*

"The subjects seem to us to be ably discussed, with a practical aim to meet the requirements of all its probable readers. The volume is well got up, and the illustrations are excellent."

The Lancet.

Heat, Expansion by.

EXPANSION OF STRUCTURES BY HEAT. By JOHN KEILY, C.E., late of the Indian Public Works and Victorian Railway Departments. Crown 8vo, 3s. 6d. cloth.

SUMMARY OF CONTENTS.

Section I. FORMULAS AND DATA.
Section II. METAL BARS.
Section III. SIMPLE FRAMES.
Section IV. COMPLEX FRAMES AND PLATES.
Section V. THERMAL CONDUCTIVITY.
Section VI. MECHANICAL FORCE OF HEAT.
Section VII. WORK OF EXPANSION AND CONTRACTION.
Section VIII. SUSPENSION BRIDGES.
Section IX. MASONRY STRUCTURES.

"The aim the author has set before him, viz., to show the effects of heat upon metallic and other structures, is a laudable one, for this is a branch of physics upon which the engineer or architect can find but little reliable and comprehensive data in books."—*Builder.*

"Whoever is concerned to know the effect of changes of temperature on such structures as suspension bridges and the like, could not do better than consult Mr. Keily's valuable and handy exposition of the geometrical principles involved in these changes."—*Scotsman.*

Earthwork, Measurement of.

A MANUAL ON EARTHWORK. By ALEX. J. S. GRAHAM, C.E. With numerous Diagrams. Second Edition. 18mo, 2s. 6d. cloth.

"A great amount of practical information, very admirably arranged, and available for rough estimates, as well as for the more exact calculations required in the engineer's and contractor's offices."—*Artisan.*

Strains in Ironwork.

THE STRAINS ON STRUCTURES OF IRONWORK; with Practical Remarks on Iron Construction. By F. W. SHEILDS, M.Inst C.E. Second Edition, with 5 Plates. Royal 8vo, 5s. cloth.

The student cannot find a better little book on this subject."—*Engineer.*

Cast Iron and other Metals, Strength of.

A PRACTICAL ESSAY ON THE STRENGTH OF CAST IRON AND OTHER METALS. By THOMAS TREDGOLD, C.E. Fifth Edition, including HODGKINSON'S Experimental Researches. 8vo, 12s. cloth.

Oblique Arches.

A PRACTICAL TREATISE ON THE CONSTRUCTION OF OBLIQUE ARCHES. By JOHN HART. Third Edition, with Plates. Imperial 8vo, 8s. cloth.

Girders, Strength of.

GRAPHIC TABLE FOR FACILITATING THE COMPUTATION OF THE WEIGHTS OF WROUGHT IRON AND STEEL GIRDERS, etc., for Parliamentary and other Estimates. By J. H. WATSON BUCK, M.Inst.C.E. On a Sheet, 2s. 6d.

MARINE ENGINEERING, SHIPBUILDING, NAVIGATION, etc.

Pocket-Book for Naval Architects and Shipbuilders,

THE NAVAL ARCHITECT'S AND SHIPBUILDER'S POCKET-BOOK of Formulæ, Rules, and Tables, and MARINE ENGINEER'S AND SURVEYOR'S Handy Book of Reference. By CLEMENT MACKROW, Member of the Institution of Naval Architects. Naval Draughtsman. Fifth Edition, Revised and Enlarged to 700 pages, with upwards of 300 Illustrations. Fcap., 12s. 6d. strongly bound in leather.

SUMMARY OF CONTENTS.

SIGNS AND SYMBOLS, DECIMAL FRACTIONS.—TRIGONOMETRY.—PRACTICAL GEOMETRY.—MENSURATION.—CENTRES AND MOMENTS OF FIGURES.—MOMENTS OF INERTIA AND RADII OF GYRATION.—ALGEBRAICAL EXPRESSIONS FOR SIMPSON'S RULES.—MECHANICAL PRINCIPLES—CENTRE OF GRAVITY.—LAWS OF MOTION.—DISPLACEMENT, CENTRE OF BUOYANCY.—CENTRE OF GRAVITY OF SHIP'S HULL.—STABILITY CURVES AND METACENTRES.—SEA AND SHALLOW-WATER WAVES.—ROLLING OF SHIPS.—PROPULSION AND RESISTANCE OF VESSELS.—SPEED TRIALS.—SAILING, CENTRE OF EFFORT.—DISTANCES DOWN RIVERS, COAST LINES.—STEERING AND RUDDERS OF VESSELS.—LAUNCHING CALCULATIONS AND VELOCITIES.—WEIGHT OF MATERIAL AND GEAR.—GUN PARTICULARS AND WEIGHT.—STANDARD GAUGES.—RIVETED JOINTS AND RIVETING.—STRENGTH AND TESTS OF MATERIALS.—BINDING AND SHEARING STRESSES, ETC.—STRENGTH OF SHAFTING, PILLARS, WHEELS, ETC.—HYDRAULIC DATA, ETC.—CONIC SECTIONS, CATENARIAN CURVES.—MECHANICAL POWERS, WORK.—BOARD OF TRADE REGULATIONS FOR BOILERS AND ENGINES.—BOARD OF TRADE REGULATIONS FOR SHIPS.—LLOYD'S RULES FOR BOILERS.—LLOYD'S WEIGHT OF CHAINS.—LLOYD'S SCANTLINGS FOR SHIPS.—DATA OF ENGINES AND VESSELS. SHIPS' FITTINGS AND TESTS.—SEASONING PRESERVING TIMBER.—MEASUREMENT OF TIMBER.—ALLOYS, PAINTS, VARNISHES.—DATA FOR STOWAGE.—ADMIRALTY TRANSPORT REGULATIONS.—RULES FOR HORSE-POWER, SCREW PROPELLERS, ETC.—PERCENTAGES FOR BUTT STRAPS, ETC.—PARTICULARS OF YACHTS.—MASTING AND RIGGING VESSELS.—DISTANCES OF FOREIGN PORTS.—TONNAGE TABLES.—VOCABULARY OF FRENCH AND ENGLISH TERMS.—ENGLISH WEIGHTS AND MEASURES—FOREIGN WEIGHTS AND MEASURES.—DECIMAL EQUIVALENTS—FOREIGN MONEY.—DISCOUNT AND WAGE TABLES.—USEFUL NUMBERS AND READY RECKONERS—TABLES OF CIRCULAR MEASURES.—TABLES OF AREAS OF AND CIRCUMFERENCES OF CIRCLES.—TABLES OF AREAS OF SEGMENTS OF CIRCLES.—TABLES OF SQUARES AND CUBES AND ROOTS OF NUMBERS.—TABLES OF LOGARITHMS OF NUMBERS.—TABLES OF HYPERBOLIC LOGARITHMS.—TABLES OF NATURAL SINES, TANGENTS, ETC.—TABLES OF LOGARITHMIC SINES, TANGENTS, ETC.

"In these days of advanced knowledge a work like this is of the greatest value. It contains a vast amount of information. We unhesitatingly say that it is the most valuable compilation for its specific purpose that has ever been printed. No naval architect, engineer, surveyor, or seaman, wood or iron shipbuilder, can afford to be without this work."—*Nautical Magazine.*

"Should be used by all who are engaged in the construction or designs of vessels. . . . Will be found to contain the most useful tables and formulæ required by shipbuilders, carefully collected from the best authorities, and put together in a popular and simple form."—*Engineer.*

"The professional shipbuilder has now, in a convenient and accessible form, reliable data for solving many of the numerous problems that present themselves in the course of his work."—*Iron*

"There is no doubt that a pocket-book of this description must be a necessity in the shipbuilding trade. . . . The volume contains a mass of useful information clearly expressed and presented in a handy form."—*Marine Engineer.*

Marine Engineering.

MARINE ENGINES AND STEAM VESSELS (A Treatise on). By ROBERT MURRAY, C.E. Eighth Edition, thoroughly Revised, with considerable Additions by the Author and by GEORGE CARLISLE, C.E., Senior Surveyor to the Board of Trade at Liverpool. 12mo, 5s. cloth boards.

"Well adapted to give the young steamship engineer or marine engine and boiler maker a general introduction into his practical work."—*Mechanical World.*

"We feel sure that this thoroughly revised edition will continue to be as popular in the future as it has been in the past, as, for its size, it contains more useful information than any similar treatise."—*Industries.*

"As a compendious and useful guide to engineers of our mercantile and royal naval services, we should say it cannot be surpassed."—*Building News.*

"The information given is both sound and sensible, and well qualified to direct young seagoing hands on the straight road to the extra chief's certificate. . . . Most useful to surveyors, inspectors, draughtsmen, and young engineers."—*Glasgow Herald.*

Pocket-Book for Marine Engineers.

A POCKET-BOOK OF USEFUL TABLES AND FORMULÆ FOR MARINE ENGINEERS. By FRANK PROCTOR, A.I.N.A. Third Edition. Royal 32mo, leather, gilt edges, with strap, 4s.

"We recommend it to our readers as going far to supply a long-felt want."—*Naval Science.*
"A most useful companion to all marine engineers."—*United Service Gazette.*

Introduction to Marine Engineering.

ELEMENTARY ENGINEERING: A Manual for Young Marine Engineers and Apprentices. In the Form of Questions and Answers on Metals, Alloys, Strength of Materials, Construction and Management of Marine Engines and Boilers, Geometry, &c. &c. With an Appendix of Useful Tables. By JOHN SHERREN BREWER, Government Marine Surveyor, Hongkong. Second Edition, Revised. Small crown 8vo, 2s. cloth.

"Contains much valuable information for the class for whom it is intended, especially in the chapters on the management of boilers and engines."—*Nautical Magazine.*
"A useful introduction to the more elaborate text-books."—*Scotsman.*
"To a student who has the requisite desire and resolve to attain a thorough knowledge, Mr. Brewer offers decidedly useful help."—*Athenæum.*

Navigation.

PRACTICAL NAVIGATION. Consisting of THE SAILOR'S SEA-BOOK, by JAMES GREENWOOD and W. H. ROSSER; together with the requisite Mathematical and Nautical Tables for the Working of the Problems, by HENRY LAW, C.E., and Professor J. R. YOUNG. Illustrated. 12mo, 7s. strongly half-bound.

Drawing for Marine Engineers.

LOCKIE'S MARINE ENGINEER'S DRAWING-BOOK. Adapted to the Requirements of the Board of Trade Examinations. By JOHN LOCKIE, C.E. With 22 Plates, Drawn to Scale. Royal 8vo, 3s. 6d. cloth.

"The student who learns from these drawings will have nothing to unlearn."—*Engineer.*
"The examples chosen are essentially practical, and are such as should prove of service to engineers generally, while admirably fulfilling their specific purpose."—*Mechanical World.*

Sailmaking.

THE ART AND SCIENCE OF SAILMAKING. By SAMUEL B. SADLER, Practical Sailmaker, late in the employment of Messrs. Ratsey and Lapthorne, of Cowes and Gosport. With Plates and other Illustrations. Small 4to, 12s. 6d. cloth.

SUMMARY OF CONTENTS.

CHAP. I. THE MATERIALS USED AND THEIR RELATION TO SAILS.—II. ON THE CENTRE OF EFFORT.—III. ON MEASURING.—IV. ON DRAWING.—V. ON THE NUMBER OF CLOTHS REQUIRED.—VI. ON ALLOWANCES.—VII. CALCULATION OF GORES.—VIII. ON CUTTING OUT.—IX. ON ROPING.—X. ON DIAGONAL-CUT SAILS.—XI. CONCLUDING REMARKS.

"This work is very ably written, and is illustrated by diagrams and carefully-worked calculations. The work should be in the hands of every sailmaker, whether employer or employed, as it cannot fail to assist them in the pursuit of their important avocations."—*Isle of Wight Herald.*
"This extremely practical work gives a complete education in all the branches of the manufacture, cutting out, roping, seaming, and goring. It is copiously illustrated, and will form a first-rate text-book and guide."—*Portsmouth Times.*
"The author of this work has rendered a distinct service to all interested in the art of sailmaking. The subject of which he treats is a congenial one. Mr. Sadler is a practical sailmaker, and has devoted years of careful observation and study to the subject; and the results of the experience thus gained he has set forth in the volume before us."—*Steamship.*

Chain Cables.

CHAIN CABLES AND CHAINS. Comprising Sizes and Curves of Links, Studs, &c., Iron for Cables and Chains, Chain Cable and Chain Making, Forming and Welding Links, Strength of Cables and Chains, Certificates for Cables, Marking Cables, Prices of Chain Cables and Chains, Historical Notes, Acts of Parliament, Statutory Tests, Charges for Testing, List of Manufacturers of Cables, &c. &c. By THOMAS W. TRAILL, F.E.R.N., M. Inst. C.E., Engineer Surveyor in Chief, Board of Trade, Inspector of Chain Cable and Anchor Proving Establishments, and General Superintendent, Lloyd's Committee on Proving Establishments. With numerous Tables, Illustrations and Lithographic Drawings. Folio, £2 2s. cloth, bevelled boards.

"It contains a vast amount of valuable information. Nothing seems to be wanting to make it a complete and standard work of reference on the subject."—*Nautical Magazine.*

MINING AND METALLURGY.

Mining Machinery.

MACHINERY FOR METALLIFEROUS MINES: A Practical Treatise for Mining Engineers, Metallurgists, and Managers of Mines. By E. HENRY DAVIES, M.E., F.G.S. Crown 8vo, 580 pp., with upwards of 300 Illustrations, 12s. 6d. cloth. [*Just published.*

"Mr. Davies, in this handsome volume, has done the advanced student and the manager of mines good service. Almost every kind of machinery in actual use is carefully described, and the woodcuts and plates are good."—*Athenæum.*

"From cover to cover the work exhibits all the same characteristics which excite the confidence and attract the attention of the student as he peruses the first page. The work may safely be recommended. By its publication the literature connected with the industry will be enriched, and the reputation of its author enhanced."—*Mining Journal.*

"Mr. Davies has endeavoured to bring before his readers the best of everything in modern mining appliances. His work carries internal evidence of the author's impartiality, and this constitutes one of the great merits of the book. Throughout his work the criticisms are based on his own or other reliable experience."—*Iron and Steel Trades' Journal.*

"The work deals with nearly every class of machinery or apparatus likely to be met with or required in connection with metalliferous mining, and is one which we have every confidence in recommending."—*Practical Engineer.*

Metalliferous Minerals and Mining.

A TREATISE ON METALLIFEROUS MINERALS AND MINING. By D. C. DAVIES, F.G.S., Mining Engineer, &c., Author of "A Treatise on Slate and Slate Quarrying." Fifth Edition, thoroughly Revised and much Enlarged, by his Son, E. HENRY DAVIES, M.E., F.G.S. With about 150 Illustrations. Crown 8vo, 12s. 6d. cloth.

"Neither the practical miner nor the general reader interested in mines can have a better book or his companion and his guide."—*Mining Journal.* [*Mining World.*

"We are doing our readers a service in calling their attention to this valuable work."

"A book that will not only be useful to the geologist, the practical miner, and the metallurgist but also very interesting to the general public."—*Iron.*

"As a history of the present state of mining throughout the world this book has a real value and it supplies an actual want."—*Athenæum.*

Earthy Minerals and Mining.

A TREATISE ON EARTHY & OTHER MINERALS AND MINING. By D. C. DAVIES, F.G.S., Author of "Metalliferous Minerals," &c. Third Edition, revised and Enlarged, by his Son, E. HENRY DAVIES, M.E., F.G.S. With about 100 Illustrations. Crown 8vo, 12s. 6d. cloth.

"We do not remember to have met with any English work on mining matters that contains the same amount of information packed in equally convenient form."—*Academy.*

"We should be inclined to rank it as among the very best of the handy technical and trades manuals which have recently appeared."—*British Quarterly Review.*

Metalliferous Mining in the United Kingdom.

BRITISH MINING: A Treatise on the History, Discovery, Practical Development, and Future Prospects of Metalliferous Mines in the United Kingdom. By ROBERT HUNT, F.R.S., Editor of "Ure's Dictionary of Arts, Manufactures, and Mines," &c. Upwards of 950 pp., with 230 Illustrations. Second Edition, Revised. Super-royal 8vo, £2 2s. cloth.

"One of the most valuable works of reference of modern times. Mr. Hunt, as Keeper of Mining Records of the United Kingdom, has had opportunities for such a task not enjoyed by anyone else and has evidently made the most of them. . . . The language and style adopted are good, and the treatment of the various subjects laborious, conscientious, and scientific."—*Engineering.*

"The book is, in fact, a treasure-house of statistical information on mining subjects, and we know of no other work embodying so great a mass of matter of this kind. Were this the only merit of Mr. Hunt's volume, it would be sufficient to render it indispensable in the library of everyone interested in the development of the mining and metallurgical industries of this country. —*Athenæum.*

"A mass of information not elsewhere available, and of the greatest value to those who may be interested in our great mineral industries."—*Engineer.*

Underground Pumping Machinery.

MINE DRAINAGE. Being a Complete and Practical Treatise on Direct-Acting Underground Steam Pumping Machinery, with a Description of a large number of the best known Engines, their General Utility and the Special Sphere of their Action, the Mode of their Application, and their merits compared with other forms of Pumping Machinery. By STEPHEN MICHELL. 8vo, 15s. cloth.

"Will be highly esteemed by colliery owners and lessees, mining engineers, and students generally who require to be acquainted with the best means of securing the drainage of mines. It is a most valuable work, and stands almost alone in the literature of steam pumping machinery. '—*Colliery Guardian.*

"Much valuable information is given, so that the book is thoroughly worthy of an extensive circulation amongst practical men and purchasers of machinery."—*Mining Journal.*

Prospecting for Gold and other Metals.

THE PROSPECTOR'S HANDBOOK: A Guide for the Prospector and Traveller in Search of Metal-Bearing or other Valuable Minerals. By J. W. ANDERSON, M.A. (Camb.), F.R.G.S., Author of "Fiji and New Caledonia." Sixth Edition, thoroughly Revised and much Enlarged. Small crown 8vo, 3s. 6d. cloth; or, 4s. 6d. leather, pocket-book form, with tuck.

[*Just published.*

"Will supply a much felt want, especially among Colonists, in whose way are so often thrown many mineralogical specimens the value of which it is difficult to determine."—*Engineer.*

"How to find commercial minerals, and how to identify them when they are found, are the leading points to which attention is directed. The author has managed to pack as much practical detail into his pages as would supply material for a book three times its size."—*Mining Journal.*

Mining Notes and Formulæ.

NOTES AND FORMULÆ FOR MINING STUDENTS. By JOHN HERMAN MERIVALE, M.A., Certificated Colliery Manager, Professor of Mining in the Durham College of Science, Newcastle-upon-Tyne. Third Edition, Revised and Enlarged. Small crown 8vo, 2s. 6d. cloth.

"Invaluable to anyone who is working up for an examination on mining subjects."—*Iron and Coal Trades Review.*

"The author has done his work in an exceedingly creditable manner, and has produced a book that will be of service to students, and those who are practically engaged in mining operations."—*Engineer*

Handybook for Miners.

THE MINER'S HANDBOOK: A Handy Book of Reference on the Subjects of Mineral Deposits, Mining Operations Ore Dressing, &c. For the Use of Students and others Interested in Mining matters. Compiled by JOHN MILNE, F.R.S., Professor of Mining in the Imperial University of Japan. Revised Edition. Fcap. 8vo, 7s. 6d. leather. [*Just published.*

"Professor Milne's handbook is sure to be received with favour by all connected with mining, and will be extremely popular among students."—*Athenæum.*

Miners' and Metallurgists' Pocket-Book.

A POCKET-BOOK FOR MINERS AND METALLURGISTS. Comprising Rules, Formulæ, Tables, and Notes, for Use in Field and Office Work. By F. DANVERS POWER, F.G.S., M.E. Fcap. 8vo, 9s. leather.

"This excellent book is an admirable example of its kind, and ought to find a large sale amongst English-speaking prospectors and mining engineers."—*Engineering.*

"A useful *vade-mecum* containing a mass of rules, formulæ, tables, and various other information, necessary for daily reference."—*Iron.*

Mineral Surveying and Valuing.

THE MINERAL SURVEYOR AND VALUER'S COMPLETE GUIDE, comprising a Treatise on Improved Mining Surveying and the Valuation of Mining Properties, with New Traverse Tables. By WM. LINTERN. Third Edition, Enlarged. 12mo, 4s. cloth.

"A valuable and thoroughly trustworthy guide."—*Iron and Coal Trades Review.*

Asbestos and its Uses.

ASBESTOS: Its Properties, Occurrence, and Uses. With some Account of the Mines of Italy and Canada. By ROBERT H. JONES. With Eight Collotype Plates and other Illustrations. Crown 8vo, 12s. 6d. cloth.

"An interesting and invaluable work."—*Colliery Guardian.*

Explosives.

A HANDBOOK ON MODERN EXPLOSIVES. Being a Practical Treatise on the Manufacture and Application of Dynamite, Gun-Cotton, Nitro-Glycerine, and other Explosive Compounds. Including the Manufacture of Collodion-Cotton. By M. EISSLER, Author of "The Metallurgy of Gold," &c. Crown 8vo, 10s. 6d. cloth.

"Useful not only to the miner, but also to officers of both services to whom blasting and the use of explosives generally may at any time become a necessary auxiliary."—*Nature.*

"A veritable mine of information on the subject of explosives employed for military, mining and blasting purposes."—*Army and Navy Gazette.*

Iron, Metallurgy of.

METALLURGY OF IRON. Containing History of Iron Manufacture, Methods of Assay, and Analyses of Iron Ores, Processes of Manufacture of Iron and Steel &c. By H. BAUERMAN, F.G.S., A.R.S.M With numerous Illustrations. Sixth Edition, Enlarged. 12mo, 5s. 6d. cloth.

Colliery Management.

THE COLLIERY MANAGER'S HANDBOOK: A Comprehensive Treatise on the Laying-out and Working of Collieries, Designed as a Book of Reference for Colliery Managers, and for the Use of Coal-Mining Students preparing for First-class Certificates. By CALEB PAMELY, Mining Engineer and Surveyor; Member of the North of England Institute of Mining and Mechanical Engineers; and Member of the South Wales Institute of Mining Engineers. With nearly 500 Plans, Diagrams, and other Illustrations. Second Edition, Revised, with Additions. Medium 8vo, about 700 pages. Price £1 5s. strongly bound.

SUMMARY OF CONTENTS.

GEOLOGY. — SEARCH FOR COAL.—MINERAL LEASES AND OTHER HOLDINGS.—SHAFT SINKING.—FITTING UP THE SHAFT AND SURFACE ARRANGEMENTS.—STEAM BOILERS AND THEIR FITTINGS.—TIMBERING AND WALLING.—NARROW WORK AND METHODS OF WORKING.—UNDERGROUND CONVEYANCE.—DRAINAGE.—THE GASES MET WITH IN MINES: VENTILATION.—ON THE FRICTION OF AIR IN MINES.—THE PRIESTMAN OIL ENGINE; PETROLEUM AND NATURAL GAS—SURVEYING AND PLANNING.—SAFETY LAMPS AND FIRE DAMP DETECTORS—SUNDRY AND INCIDENTAL OPERATIONS AND APPLIANCES.—COLLIERY EXPLOSIONS—MISCELLANEOUS QUESTIONS & ANSWERS.

Appendix: SUMMARY OF REPORT OF H.M. COMMISSIONERS ON ACCIDENTS IN MINES.

*** OPINIONS OF THE PRESS.

"Mr. Pamely has not only given us a comprehensive reference book of a very high order, suitable to the requirements of mining engineers and colliery managers, but at the same time has provided mining students with a class-book that is as interesting as it is instructive."—*Colliery Manager.*

"Mr. Pamely's work is eminently suited to the purpose for which it is intended—being clear, interesting, exhaustive, rich in detail, and up to date, giving descriptions of the very latest machines in every department. . . . A mining engineer could scarcely go wrong who followed this work."—*Colliery Guardian.*

"This is the most complete 'all-round' work on coal-mining published in the English language. . . . No library of coal-mining books is complete without it."—*Colliery Engineer* (Scranton, Pa., U.S.A.).

"Mr. Pamely's work is in all respects worthy of our admiration. No person in any responsible position connected with mines should be without a copy."—*Westminster Review.*

Coal and Iron.

THE COAL AND IRON INDUSTRIES OF THE UNITED KINGDOM. Comprising a Description of the Coal Fields, and of the Principal Seams of Coal, with Returns of their Produce and its Distribution, and Analyses of Special Varieties. Also an Account of the occurrence of Iron Ores in Veins or Seams; Analyses of each Variety; and a History of the Rise and Progress of Pig Iron Manufacture. By RICHARD MEADE, Assistant Keeper of Mining Records. With Maps. 8vo, £1 8s. cloth.

"The book is one which must find a place on the shelves of all interested in coal and iron production, and in the iron, steel, and other metallurgical industries."—*Engineer.*

"Of this book we may unreservedly say that it is the best of its class which we have ever met. . . . A book of reference which no one engaged in the iron or coal trades should omit from his library."—*Iron and Coal Trades Review.*

Coal Mining.

COAL AND COAL MINING: A Rudimentary Treatise on. By the late Sir WARINGTON W. SMYTH, M.A., F.R.S., &c., Chief Inspector of the Mines of the Crown. Seventh Edition, Revised and Enlarged. With numerous Illustrations. 12mo, 4s. cloth boards.

"As an outline is given of every known coal-field in this and other countries, as well as of the principal methods of working, the book will doubtless interest a very large number of readers."—*Mining Journal.*

Subterraneous Surveying.

SUBTERRANEOUS SURVEYING, Elementary and Practical Treatise on, with and without the Magnetic Needle. By THOMAS FENWICK, Surveyor of Mines, and THOMAS BAKER, C.E. Illust. 12mo, 3s. cloth boards.

Granite Quarrying.

GRANITES AND OUR GRANITE INDUSTRIES. By GEORGE F. HARRIS, F.G.S., Membre de la Société Belge de Géologie, Lecturer on Economic Geology at the Birkbeck Institution, &c. With Illustrations. Crown 8vo, 2s. 6d. cloth.

"A clearly and well-written manual on the granite industry."—*Scotsman.*

"An interesting work, which will be deservedly esteemed."—*Colliery Guardian.*

"An exceedingly interesting and valuable monograph on a subject which has hitherto received unaccountably little attention in the shape of systematic literary treatment."—*Scottish Leader.*

Gold, Metallurgy of.

THE METALLURGY OF GOLD: A Practical Treatise on the Metallurgical Treatment of Gold-bearing Ores. Including the Processes of Concentration and Chlorination, and the Assaying, Melting, and Refining of Gold. By M. EISSLER, Mining Engineer and Metallurgical Chemist, formerly Assistant Assayer of the U.S. Mint, San Francisco. Third Edition, Revised and greatly Enlarged. With 187 Illustrations. Crown 8vo, 12s. 6d. cloth.

"This book thoroughly deserves its title of a 'Practical Treatise.' The whole process of gold milling, from the breaking of the quartz to the assay of the bullion, is described in clear and orderly narrative and with much, but not too much, fulness of detail."—*Saturday Review.*

"The work is a storehouse of information and valuable data, and we strongly recommend it to all professional men engaged in the gold-mining industry."—*Mining Journal.*

Gold Extraction.

THE CYANIDE PROCESS OF GOLD EXTRACTION: and its Practical Application on the Witwatersrand Gold Fields in South Africa. By M. EISSLER, M.E., Mem. Inst. Mining and Metallurgy, Author of "The Metallurgy of Gold," &c. With Diagrams and Working Drawings. Large crown 8vo, 7s. 6d. cloth. [*Just published.*

"This book is just what was needed to acquaint mining men with the actual working of a process which is not only the most popular, but is, as a general rule, the most successful for the extraction of gold from tailings."—*Mining Journal.*

"The work will prove invaluable to all interested in gold mining, whether metallurgists or as investors."—*Chemical News.*

Silver, Metallurgy of.

THE METALLURGY OF SILVER: A Practical Treatise on the Amalgamation, Roasting, and Lixiviation of Silver Ores. Including the Assaying, Melting and Refining, of Silver Bullion. By M. EISSLER, Author of "The Metallurgy of Gold," &c. Second Edition, Enlarged. With 150 Illustrations. Crown 8vo, 10s. 6d. cloth.

"A practical treatise, and a technical work which we are convinced will supply a long-felt want amongst practical men, and at the same time be of value to students and others indirectly connected with the industries."—*Mining Journal.*

"From first to last the book is thoroughly sound and reliable."—*Colliery Guardian.*

"For chemists, practical miners, assayers, and investors alike, we do not know of any work on the subject so handy and yet so comprehensive."—*Glasgow Herald.*

Lead, Metallurgy of.

THE METALLURGY OF ARGENTIFEROUS LEAD: A Practical Treatise on the Smelting of Silver-Lead Ores and the Refining of Lead Bullion. Including Reports on various Smelting Establishments and Descriptions of Modern Smelting Furnaces and Plants in Europe and America. By M. EISSLER, M.E., Author of "The Metallurgy of Gold," &c. Crown 8vo, 400 pp., with 183 Illustrations, 12s. 6d. cloth.

"The numerous metallurgical processes, which are fully and extensively treated of, embrace all the stages experienced in the passage of the lead from the various natural states to its issue from the refinery as an article of commerce."—*Practical Engineer.*

"The present volume fully maintains the reputation of the author. Those who wish to obtain a thorough insight into the present state of this industry cannot do better than read this volume, and all mining engineers cannot fail to find many useful hints and suggestions in it."—*Industries.*

"It is most carefully written and illustrated with capital drawings and diagrams. In fact, it is the work of an expert for experts, by whom it will be prized as an indispensable text-book."—*Bristol Mercury.*

Iron Mining.

THE IRON ORES OF GREAT BRITAIN AND IRELAND: Their Mode of Occurrence, Age, and Origin, and the Methods of Searching for and Working them, with a Notice of some of the Iron Ores of Spain. By J. D. KENDALL, F.G.S., Mining Engineer. Crown 8vo, 16s. cloth.

"The author has a thorough practica knowledge of his subject, and has supplemented a careful study of the available literature by unpublished information derived from his own observations. The result is a very useful volume which cannot fail to be of value to all interested in the iron industry of the country."—*Industries.*

"Mr. Kendall is a great authority on this subject and writes from personal observation."—*Colliery Guardian.*

"Mr. Kendall's book is thoroughly well done. In it there are the outlines of the history of ore mining in every centre and there is everything that we want to know as to the character of the ores of each district, their commercial value and the cost of working them."—*Iron and Steel Trades Journal.*

ELECTRICITY, ELECTRICAL ENGINEERING, etc.

Electrical Engineering.

THE ELECTRICAL ENGINEER'S POCKET-BOOK OF MODERN RULES, FORMULÆ, TABLES, AND DATA. By H. R. KEMPE, M.Inst.E.E., A.M.Inst.C.E., Technical Officer, Postal Telegraphs, Author of "A Handbook of Electrical Testing." &c. Second Edition, thoroughly Revised, with Additions. With numerous Illustrations. Royal 32mo, oblong, 5s. leather.

"There is very little in the shape of formulæ or data which the electrician is likely to want in a hurry which cannot be found in its pages."—*Practical Engineer.*

"A very useful book of reference for daily use in practical electrical engineering and its various applications to the industries of the present day."—*Iron.*

"It is the best book of its kind."—*Electrical Engineer.*

"Well arranged and compact. The 'Electrical Engineer's Pocket-Book' is a good one."—*Electrician.*

"Strongly recommended to those engaged in the various electrical industries."—*Electrical Review.*

Electric Lighting.

ELECTRIC LIGHT FITTING: A Handbook for Working Electrical Engineers, embodying Practical Notes on Installation Management. By JOHN W. URQUHART, Electrician, Author of "Electric Light." &c With numerous Illustrations. Second Edition, Revised, with Additional Chapters. Crown 8vo, 5s. cloth.

"This volume deals with what may be termed the mechanics of electric lighting, and is addressed to men who are already engaged in the work or are training for it. The work traverses a great deal of ground, and may be read as a sequel to the same author's useful work on 'Electric Light.'"—*Electrician.*

"This is an attempt to state in the simplest language the precautions which should be adopted in installing the electric light, and to give information, for the guidance of those who have to run the plant when installed. The book is well worth the perusal of the workmen for whom it is written."—*Electrical Review.*

"We have read this book with a good deal of pleasure. We believe that the book will be of use to practical workmen, who will not be alarmed by finding mathematical formulæ which they are unable to understand."—*Electrical Plant.*

"Eminently practical and useful. . . . Ought to be in the hands of everyone in charge of an electric light plant."—*Electrical Engineer.*

"Mr. Urquhart has succeeded in producing a really capital book, which we have no hesitation in recommending to the notice of working electricians and electrical engineers."—*Mechanical World.*

Electric Light.

ELECTRIC LIGHT: Its Production and Use. Embodying Plain Directions for the Treatment of Dynamo-Electric Machines, Batteries, Accumulators, and Electric Lamps. By J. W. URQUHART, C.E., Author of "Electric Light Fitting," "Electroplating," &c. Fifth Edition, carefully Revised, with Large Additions and 145 Illustrations. Crown 8vo, 7s. 6d. cloth.

"The whole ground of electric lighting is more or less covered and explained in a very clear and concise manner."—*Electrical Review.*

"Contains a good deal of very interesting information, especially in the parts where the author gives dimensions and working costs."—*Electrical Engineer.*

"A miniature *vade-mecum* of the salient facts connected with the science of electric lighting."—*Electrician.*

"You cannot for your purpose have a better book than 'Electric Light,' by Urquhart."—*Engineer.*

"The book is by far the best that we have yet met with on the subject."—*Athenæum.*

Construction of Dynamos.

DYNAMO CONSTRUCTION: A Practical Handbook for the Use of Engineer Constructors and Electricians-in-Charge. Embracing Framework Building, Field Magnet and Armature Winding and Grouping, Compounding, &c. With Examples of leading English, American, and Continental Dynamos and Motors. By J. W. URQUHART, Author of "Electric Light," "Electric Light Fitting," &c. Second Edition, Revised and Enlarged. With 114 Illustrations. Crown 8vo, 7s. 6d. cloth. [*Just published.*

"Mr. Urquhart's book is the first one which deals with these matters in such a way that the engineering student can understand them. The book is very readable, and the author leads his readers up to difficult subjects by reasonably simple tests."—*Engineering Review.*

"The author deals with his subject in a style so popular as to make his volume a handbook of great practical value to engineer contractors and electricians in charge of lighting installations."—*Scotsman.*

"'Dynamo Construction' more than sustains the high character of the author's previous publications. It is sure to be widely read by the large and rapidly increasing number of practical electricians."—*Glasgow Herald.*

"A book for which a demand has long existed."—*Mechanical World.*

A New Dictionary of Electricity.

THE STANDARD ELECTRICAL DICTIONARY. A Popular Dictionary of Words and Terms Used in the Practice of Electrical Engineering. Containing upwards of 3,000 Definitions. By T. O'CONNOR SLOANE A.M., Ph.D.. Author of "The Arithmetic of Electricity," &c. Crown 8vo, 610 pp., 350 Illustrations, 7s. 6d. cloth. *[Just published.*

"The work has many attractive features in it, and is beyond doubt, a well put together and useful publication. The amount of ground covered may be gathered from the fact that in the index about 5,000 references will be found. The inclusion of such comparatively modern words as 'impedence,' 'reluctance,' &c., shows that the author has desired to be up to date, and indeed there are other indications of carefulness of compilation. The work is one which does the author great credit and it should prove of great value, especially to students."—*Electrical Review.*

Very complete and contains a large amount of useful information."—*Industries.*

"An encyclopædia of electrical science in the compass of a dictionary. The information given is sound and clear. The book is well printed, well illustrated, and well up to date, and may be confidently recommended."—*Builder.*

"The volume is excellently printed and illustrated, and should form part of the library of every one who is connected with electrical matters."—*Hardware Trade Journal.*

Electric Lighting of Ships.

ELECTRIC SHIP-LIGHTING: A Handbook on the Practical Fitting and Running of Ship's Electrical Plant. For the Use of Shipowners and Builders. Marine Electricians, and Sea-going Engineers-in-Charge. By J. W. URQUHART, C.E. With 88 Illustrations. Crown 8vo, 7s 6d. cloth.

"The subject of ship electric lighting is one of vast importance in these days, and Mr. Urquhart is to be highly complimented for placing such a valuable work at the service of the practical marine electrician."—*The Steamship.*

"Distinctly a book which of its kind stands almost alone, and for which there should be a demand.'—*Electrical Review.*

Country House Electric Lighting.

ELECTRIC LIGHT FOR COUNTRY HOUSES: A Practical Handbook on the Erection and Running of Small Installations, with particulars of the Cost of Plant and Working. By J. H. KNIGHT. Crown 8vo, 1s. wrapper. *[Just published.*

Electric Lighting.

THE ELEMENTARY PRINCIPLES OF ELECTRIC LIGHTING. By ALAN A. CAMPBELL SWINTON, Associate I.E.E. Third Edition, Enlarged and Revised. With 16 Illustrations. Crown 8vo, 1s. 6d. cloth

"Anyone who desires a short and thoroughly clear exposition of the elementary principles of electric lighting cannot do better than read this little work."—*Bradford Observer.*

Dynamic Electricity.

THE ELEMENTS OF DYNAMIC ELECTRICITY AND MAGNETISM. By PHILIP ATKINSON, A.M., Ph.D., Author of "The Elements of Electric Lighting," &c. Cr. 8vo, with 120 Illustrations, 10s. 6d. cl.

Electric Motors, &c.

THE ELECTRIC TRANSFORMATION OF POWER and its Application by the Electric Motor, Including Electric Railway Construction. By P. ATKINSON, A.M., Ph.D, Author of "The Elements of Electric Lighting," &c. With 96 Illustrations. Crown 8vo, 7s. 6d. cloth.

Dynamo Construction.

HOW TO MAKE A DYNAMO: A Practical Treatise for Amateurs. Containing numerous Illustrations and Detailed Instructions for Constructing a Small Dynamo, to Produce the Electric Light. By ALFRED CROFTS. Fourth Edition, Revised and Enlarged. Crown 8vo, 2s. cloth.

"The instructions given in this unpretentious little book are sufficiently clear and explicit to enable any amateur mechanic possessed of average skill and the usual tools to be found in an amateur's workshop, to build a practical dynamo machine."—*Electrician.*

Text Book of Electricity.

THE STUDENT'S TEXT-BOOK OF ELECTRICITY. By HENRY M. NOAD, F.R.S. 630 pages, with 470 Illustrations. Cheaper Edition. Crown 8vo, 9s. cloth. *[Just published.*

Electricity.

A MANUAL OF ELECTRICITY: Including Galvanism, Magnetism, Dia-Magnetism, Electro-Dynamics. By HENRY M. NOAD, Ph.D., F.R.S. Fourth Edition (1859). 8vo, £1 4s. cloth.

ARCHITECTURE, BUILDING, etc.

Building Construction.

PRACTICAL BUILDING CONSTRUCTION: A Handbook for Students Preparing for Examinations, and a Book of Reference for Persons Engaged in Building. By JOHN P. ALLEN, Surveyor, Lecturer on Building Construction at the Durham College of Science, Newcastle. Medium 8vo, 450 pages, with 1,000 Illustrations 12s. 6d. cloth. [*Just published.*

"This volume is one of the most complete expositions of building construction we have seen. It contains all that is necessary to prepare students for the various examinations in building construction."—*Building News.*

"The author depends nearly as much on his diagrams as on his type. The pages suggest the hand of a man of experience in building operations—and the volume must be a blessing to many teachers as well as to students."—*The Architect.*

"The work is sure to prove a formidable rival to great and small competitors alike, and bids fair to take a permanent place as a favourite students' text-book. The large number of illustrations deserve particular mention for the great merit they possess for purposes of reference, in exactly corresponding to convenient scales."—*Your. Inst. Brit. Archts.*

The New London Building Act, 1894.

THE LONDON BUILDING ACT, 1894; with the By-Laws and Regulations of the London County Council, and Introduction, Notes, Cases and Index. By ALEX. J. DAVID, B.A., LL.M. of the Inner Temple, Barrister-at-Law. Crown 8vo, 3s. 6d. cloth. [*Just published.*

"To all architects and district surveyors and builders, Mr. David's manual will be welcome."—*Building News.*

"The volume will doubtless be eagerly consulted by the building fraternity."—*Illustrated Carpenter and Builder.*

Concrete.

CONCRETE: ITS NATURE AND USES. A Book for Architects, Builders, Contractors, and Clerks of Works. By GEORGE L. SUTCLIFFE, A.R.I.B.A. Crown 8vo, 7s. 6d. cloth. [*Just published.*

"The author treats a difficult subject in a lucid manner. The manual fills a long-felt gap. It is careful and exhaustive; equally useful as a student's guide and a architect's book of reference."—*Journal of Royal Institution of British Architects.*

"There is room for this new book, which will probably be for some time the standard work on the subject for a builder's purpose."—*Glasgow Herald.*

"A thoroughly useful and comprehensive work."—*British Architect.*

Mechanics for Architects.

THE MECHANICS OF ARCHITECTURE: A Treatise on Applied Mechanics, especially Adapted to the Use of Architects. By E. W. TARN, M.A., Author of "The Science of Building," &c. Second Edition, Enlarged Illust. with 125 Diagrams. Cr. 8vo, 7s. 6d. cloth. [*Just published.*

"The book is a very useful and helpful manual of architectural mechanics, and really contains sufficient to enable a careful and painstaking student to grasp the principles bearing upon the majority of building problems. . . . Mr. Tarn has added, by this volume, to the debt of gratitude which is owing to him by architectural students for the many valuable works which he has produced for their use."—*The Builder.*

"The mechanics in the volume are really mechanics, and are harmoniously wrought in with the distinctive professional manner proper to the subject."—*The Schoolmaster.*

The New Builder's Price Book, 1895.

LOCKWOOD'S BUILDER'S PRICE BOOK FOR 1895. A Comprehensive Handbook of the Latest Prices and Data for Builders, Architects, Engineers, and Contractors. By FRANCIS T. W. MILLER. 800 closely-printed pages, crown 8vo, 4s. cloth.

"This book is a very useful one, and should find a place in every English office connected with the building and engineering professions."—*Industries.*

"An excellent book of reference."—*Architect.*

"In its new and revised form this PRICE BOOK is what a work of this kind should be—comprehensive, reliable, well arranged, legible, and well bound."—*British Architect.*

Designing Buildings.

THE DESIGN OF BUILDINGS: Being Elementary Notes on the Planning, Sanitation and Ornamentive Formation of Structures, based on Modern Practice. Illustrated with Nine Folding Plates. By W. WOODLEY, Assistant Master, Metropolitan Drawing Classes, &c. 8vo, 6s. cloth.

Sir Wm. Chambers's Treatise on Civil Architecture.

THE DECORATIVE PART OF CIVIL ARCHITECTURE. By Sir WILLIAM CHAMBERS, F.R.S. With Portrait, Illustrations, Notes, and an Examination of Grecian Architecture, by JOSEPH GWILT, F.S.A. Revised and Edited by W. H. LEEDS. 66 Plates, 4to, 21s. cloth.

Villa Architecture.

A HANDY BOOK OF VILLA ARCHITECTURE: Being a Series of Designs for Villa Residences in various Styles. With Outline Specifications and Estimates. By C. WICKES, Architect, Author of "The Spires and Towers of England," &c. 61 Plates, 4to, £1 11s. 6d. half-morocco.

"The whole of the designs bear evidence of their being the work of an artistic architect, and they will prove very valuable and suggestive."—*Building News.*

Text-Book for Architects.

THE ARCHITECT'S GUIDE: Being a Text-Book of Useful Information for Architects, Engineers, Surveyors, Contractors, Clerks of Works, &c. &c. By FREDERICK ROGERS, Architect. Third Edition. Crown 8vo, 3s. 6d. cloth.

"As a text-book of useful information for architects, engineers, surveyors, &c., it would be hard to find a handier or more complete little volume."—*Standard.*

Taylor and Cresy's Rome.

THE ARCHITECTURAL ANTIQUITIES OF ROME. By the late G. L. TAYLOR, Esq., F.R.I.B.A., and EDWARD CRESY, Esq. New Edition, thoroughly Revised by the Rev. ALEXANDER TAYLOR, M.A. (son of the late G. L. Taylor, Esq.), Fellow of Queen's College, Oxford, and Chaplain of Gray's Inn. Large folio, with 130 Plates, £3 3s. half-bound.

"Taylor and Cresy's work has from its first publication been ranked among those professional books which cannot be bettered."—*Architect.*

Linear Perspective.

ARCHITECTURAL PERSPECTIVE: The whole Course and Operations of the Draughtsman in Drawing a Large House in Linear Perspective. Illustrated by 43 Folding Plates. By F. O. FERGUSON. Second Edition, Enlarged. 8vo, 3s. 6d. boards. [*Just published.*

"It is the most intelligible of the treatises on this ill-treated subject that I have met with."—E. INGRESS BELL, Esq., in the *R.I.B.A. Journal.*

Architectural Drawing.

PRACTICAL RULES ON DRAWING, for the Operative Builder and Young Student in Architecture. By GEORGE PYNE. With 14 Plates, 4to, 7s. 6d. boards.

Vitruvius' Architecture.

THE ARCHITECTURE of MARCUS VITRUVIUS POLLIO. Translated by JOSEPH GWILT, F.S.A., F.R.A.S. New Edition, Revised by the Translator. With 23 Plates. Fcap. 8vo, 5s. cloth.

Designing, Measuring, and Valuing.

THE STUDENT'S GUIDE to the PRACTICE of MEASURING AND VALUING ARTIFICERS' WORK. Containing Directions for taking Dimensions, Abstracting the same, and bringing the Quantities into Bill, with Tables of Constants for Valuation of Labour, and for the Calculation of Areas and Solidities. Originally edited by EDWARD DOBSON, Architect. With Additions by E. WYNDHAM TARN, M.A. Sixth Edition. With 8 Plates and 63 Woodcuts. Crown 8vo, 7s. 6d. cloth.

"This edition will be found the most complete treatise on the principles of measuring and valuing artificers' work that has yet been published."—*Building News.*

Pocket Estimator and Technical Guide.

THE POCKET TECHNICAL GUIDE, MEASURER, AND ESTIMATOR FOR BUILDERS AND SURVEYORS. Containing Technical Directions for Measuring Work in all the Building Trades, Complete Specifications for Houses, Roads, and Drains, and an easy Method of Estimating the parts of a Building collectively. By A. C. BEATON. Seventh Edit. Waistcoat-pocket size, 1s. 6d. leather, gilt edges.

"No builder, architect, surveyor, or valuer should be without his 'Beaton.'"—*Building News.*

Donaldson on Specifications.

THE HANDBOOK OF SPECIFICATIONS; or, Practical Guide to the Architect, Engineer, Surveyor, and Builder, in drawing up Specifications and Contracts for Works and Constructions. Illustrated by Precedents of Buildings actually executed by eminent Architects and Engineers. By Professor T. L. DONALDSON, P.R.I.B.A., &c. New Edition. 8vo. with upwards of 1,000 pages of Text, and 33 Plates £1 11s. 6d. cloth.

"Valuable as a record, and more valuable still as a book of precedents. . . . Suffice it to say that Donaldson's 'Handbook of Specifications' must be bought by all architects."—*Builder.*

Bartholomew and Rogers' Specifications.

SPECIFICATIONS FOR PRACTICAL ARCHITECTURE. A Guide to the Architect, Engineer, Surveyor, and Builder. With an Essay on the Structure and Science of Modern Buildings. Upon the Basis of the Work by ALFRED BARTHOLOMEW, thoroughly Revised, Corrected, and greatly added to by FREDERICK ROGERS, Architect. Third Edition, Revised, with Additions. With numerous Illustrations. Medium 8vo, 15s. cloth.

"The collection of specifications prepared by Mr. Rogers on the basis of Bartholomew's work is too well known to need any recommendation from us. It is one of the books with which every young architect must be equipped."—*Architect.*

Construction.

THE SCIENCE OF BUILDING: An Elementary Treatise on the Principles of Construction. By E. WYNDHAM TARN, M.A., Architect. Third Edition, Revised and Enlarged. With 59 Engravings. Fcap. 8vo, 4s. cl.

"A very valuable book, which we strongly recommend to all students."—*Builder.*

House Building and Repairing.

THE HOUSE-OWNER'S ESTIMATOR; or, What will it Cost to Build, Alter, or Repair? A Price Book for Unprofessional People, as well as the Architectural Surveyor and Builder. By J. D. SIMON. Edited by F. T. W. MILLER, A.R.I.B.A. Fourth Edition. Crown 8vo, 3s. 6d. cloth.

"In two years it will repay its cost a hundred times over."—*Field.*

Cottages and Villas.

COUNTRY AND SUBURBAN COTTAGES AND VILLAS: How to Plan and Build Them. Containing 33 Plates, with Introduction, General Explanations, and Description of each Plate. By JAMES W. BOGUE, Architect, Author of "Domestic Architecture," &c. 4to, 10s. 6d. cloth.

Building; Civil and Ecclesiastical.

A BOOK ON BUILDING, Civil and Ecclesiastical, including Church Restoration; with the Theory of Domes and the Great Pyramid, &c. By Sir EDMUND BECKETT, Bart., LL.D., F.R.A.S. Fcap. 8vo, 5s. cloth.

"A book which is always amusing and nearly always instructive."—*Times.*

Sanitary Houses, etc.

THE SANITARY ARRANGEMENT OF DWELLING-HOUSES: A Handbook for Householders and Owners of Houses. By A. J. WALLIS-TAYLER, A.M. Inst. C.E. With numerous Illustrations. Crown 8vo, 2s. 6d. cloth. [*Just published.*

"This book will be largely read; it will be of considerable service to the public. It is well arranged, easily read, and for the most part devoid of technical terms."—*Lancet.*

Ventilation of Buildings.

VENTILATION. A Text Book to the Practice of the Art of Ventilating Buildings. By W. P. BUCHAN, R.P. 12mo, 4s. cloth.

"Contains a great amount of useful practical information, as thoroughly interesting as it is technically reliable."—*British Architect.*

The Art of Plumbing.

PLUMBING. A Text Book to the Practice of the Art or Craft of the Plumber. By WILLIAM PATON BUCHAN, R.P. Sixth Edition. 4s. cloth.

"A text-book which may be safely put in the hands of every young plumber."—*Builder.*

Geometry for the Architect, Engineer, etc.

PRACTICAL GEOMETRY, for the Architect, Engineer, and Mechanic. Giving Rules for the Delineation and Application of various Geometrical Lines, Figures and Curves. By E. W. TARN, M.A., Architect. 8vo, 9s. cloth.

"No book with the same objects in view has ever been published in which the clearness of the rules laid down and the illustrative diagrams have been so satisfactory."—*Scotsman.*

The Science of Geometry.

THE GEOMETRY OF COMPASSES; or, Problems Resolved by the mere Description of Circles, and the use of Coloured Diagrams and Symbols. By OLIVER BYRNE. Coloured Plates. Crown 8vo, 3s. 6d. cloth.

CARPENTRY, TIMBER, etc.

Tredgold's Carpentry, Revised & Enlarged by Tarn.

THE ELEMENTARY PRINCIPLES OF CARPENTRY. A Treatise on the Pressure and Equilibrium of Timber Framing, the Resistance of Timber, and the Construction of Floors, Arches, Bridges, Roofs, Uniting Iron and Stone with Timber, &c. To which is added an Essay on the Nature and Properties of Timber, &c., with Descriptions of the kinds of Wood used in Building; also numerous Tables of the Scantlings of Timber for different purposes, the Specific Gravities of Materials, &c. By THOMAS TREDGOLD, C.E. With an Appendix of Specimens of Various Roofs of Iron and Stone, Illustrated. Seventh Edition, thoroughly revised and considerably enlarged by E. WYNDHAM TARN, M.A., Author of "The Science of Building," &c. With 61 Plates, Portrait of the Author, and several Woodcuts. In One large Vol., 4to, price £1 5s. cloth.

"Ought to be in every architect's and every builder's library."—*Builder.*

"A work whose monumental excellence must commend it wherever skilful carpentry is concerned. The author's principles are rather confirmed than impaired by time. The additional plates are of great intrinsic value."—*Building News.*

Woodworking Machinery.

WOODWORKING MACHINERY: Its Rise, Progress, and Construction. With Hints on the Management of Saw Mills and the Economical Conversion of Timber. Illustrated with Examples of Recent Designs by leading English, French, and American Engineers. By M. POWIS BALE, A.M.Inst.C.E., M.I.M.E. Second Edition, Revised, with large Additions. Large crown 8vo, 430 pp., 9s. cloth. [*Just published.*

"Mr. Bale is evidently an expert on the subject and he has collected so much information that the book is all-sufficient for builders and others engaged in the conversion of timber."—*Architect.*

"The most comprehensive compendium of wood-working machinery we have seen. The author is a thorough master of his subject."—*Building News.*

Saw Mills.

SAW MILLS: Their Arrangement and Management, and the Economical Conversion of Timber. (A Companion Volume to "Woodworking Machinery.") By M. POWIS BALE. Crown 8vo, 10s. 6d. cloth.

"The *administration* of a large sawing establishment is discussed and the subject examined from a financial standpoint. Hence the size, shape, order, and disposition of saw-mills and the like are gone into in detail, and the course of the timber is traced from its reception to its delivery in its converted state. We could not desire a more complete or practical treatise."—*Builder.*

Nicholson's Carpentry.

THE CARPENTER'S NEW GUIDE; or, Book of Lines for Carpenters; comprising all the Elementary Principles essential for acquiring a knowledge of Carpentry. Founded on the late PETER NICHOLSON'S Standard Work. New Edition, Revised by A. ASHPITEL, F.S.A. With Practical Rules on Drawing, by G. PYNE. With 74 Plates. 4to, £1 1s. cloth.

Handrailing and Stairbuilding.

A PRACTICAL TREATISE ON HANDRAILING: Showing New and Simple Methods for Finding the Pitch of the Plank, Drawing the Moulds, Bevelling, Jointing-up, and Squaring the Wreath. By GEORGE COLLINGS. Second Edition, Revised and Enlarged, to which is added A TREATISE ON STAIRBUILDING. 12mo, 2s. 6d. cloth limp.

"Will be found of practical utility in the execution of this difficult branch of joinery."—*Builder.*

"Almost every difficult phase of this somewhat intricate branch of joinery is elucidated by the aid of plates and explanatory letterpress."—*Furniture Gazette.*

Circular Work.

CIRCULAR WORK IN CARPENTRY AND JOINERY: A Practical Treatise on Circular Work of Single and Double Curvature. By GEORGE COLLINGS. With Diagrams. Second Edit. 12mo, 2s. 6d. cloth limp.

"An excellent example of what a book of this kind should be. Cheap in price, clear in definition and practical in the examples selected."—*Builder.*

Handrailing.

HANDRAILING COMPLETE IN EIGHT LESSONS. On the Square-Cut System. By J. S. GOLDTHORP, Teacher of Geometry and Building Construction at the Halifax Mechanic's Institute. With Eight Plates and over 150 Practical Exercises. 4to, 3s. 6d. cloth.

"Likely to be of considerable value to joiners and others who take a pride in good work. We heartily commend it to teachers and students."—*Timber Trades Journal.*

Timber Merchant's Companion.

THE TIMBER MERCHANT'S AND BUILDER'S COMPANION. Containing New and Copious Tables of the Reduced Weight and Measurement of Deals and Battens, of all sizes, from One to a Thousand Pieces, and the relative Price that each size bears per Lineal Foot to any given Price per Petersburg Standard Hundred; the Price per Cube Foot of Square Timber to any given Price per Load of 50 Feet; the proportionate Value of Deals and Battens by the Standard, to Square Timber by the Load of 50 Feet; the readiest mode of ascertaining the Price of Scantling per Lineal Foot of any size, to any given Figure per Cube Foot, &c. &c. By WILLIAM DOWSING. Fourth Edition, Revised and Corrected. Cr. 8vo, 3s. cl.

"Everything is as concise and clear as it can possibly be made. There can be no doubt that every timber merchant and builder ought to possess it."—*Hull Advertiser.*

"We are glad to see a fourth edition of these admirable tables, which for correctness and simplicity of arrangement leave nothing to be desired."—*Timber Trades Journal.*

Practical Timber Merchant.

THE PRACTICAL TIMBER MERCHANT. Being a Guide for the use of Building Contractors, Surveyors, Builders, &c., comprising useful Tables for all purposes connected with the Timber Trade, Marks of Wood, Essay on the Strength of Timber, Remarks on the Growth of Timber, &c. By W. RICHARDSON. Fcap. 8vo, 3s. 6d. cloth.

"This handy manual contains much valuable information for the use of timber merchants, builders, foresters, and all others connected with the growth, sale, and manufacture of timber."—*Journal of Forestry.*

Timber Freight Book.

THE TIMBER MERCHANT'S, SAW MILLER'S, AND IMPORTER'S FREIGHT BOOK AND ASSISTANT. Comprising Rules, Tables, and Memoranda relating to the Timber Trade. By WILLIAM RICHARDSON, Timber Broker; together with a Chapter on "SPEEDS OF SAW MILL MACHINERY," by M. POWIS BALE, M.I.M.E., &c. 12mo, 3s. 6d. cl. boards.

"A very useful manual of rules, tables, and memoranda relating to the timber trade. We recommend it as a compendium of calculation to all timber measurers and merchants, and as supplying a real want in the trade."—*Building News.*

Packing-Case Makers, Tables for.

PACKING-CASE TABLES; showing the number of Superficial Feet in Boxes or Packing-Cases, from six inches square and upwards. By W. RICHARDSON, Timber Broker. Third Edition. Oblong 4to, 3s. 6d. cl.

"Invaluable labour-saving tables."—*Ironmonger.*

"Will save much labour and calculation."—*Grocer.*

Superficial Measurement.

THE TRADESMAN'S GUIDE TO SUPERFICIAL MEASUREMENT. Tables calculated from 1 to 200 inches in length, by 1 to 108 inches in breadth. For the use of Architects, Surveyors, Engineers, Timber Merchants, Builders, &c. By JAMES HAWKINGS. Fourth Edition. Fcap., 3s. 6d. cloth.

"A useful collection of tables to facilitate rapid calculation of surfaces. The exact area of any surface of which the limits have been ascertained can be instantly determined. The book will be found of the greatest utility to all engaged in building operations."—*Scotsman.*

"These tables will be found of great assistance to all who require to make calculations in superficial measurement."—*English Mechanic.*

Forestry.

THE ELEMENTS OF FORESTRY. Designed to afford Information concerning the Planting and Care of Forest Trees for Ornament or Profit, with Suggestions upon the Creation and Care of Woodlands. By F. B. HOUGH. Large crown 8vo, 10s. cloth.

Timber Importer's Guide.

THE TIMBER IMPORTER'S, TIMBER MERCHANT'S, AND BUILDER'S STANDARD GUIDE. By RICHARD E. GRANDY. Comprising an Analysis of Deal Standards, Home and Foreign, with Comparative Values and Tabular Arrangements for fixing Net Landed Cost on Baltic and North American Deals, including all intermediate Expenses, Freight, Insurance, &c. &c. Together with copious Information for the Retailer and Builder. Third Edition, Revised. 12mo, 2s. cloth limp.

"Everything it pretends to be: built up gradually, it leads one from a forest to a treenail, and throws in, as a makeweight, a host of material concerning bricks, columns, cisterns, &c."—*English Mechanic.*

DECORATIVE ARTS, etc.

Woods and Marbles (Imitation of).

SCHOOL OF PAINTING FOR THE IMITATION OF WOODS AND MARBLES, as Taught and Practised by A. R. VAN DER BURG and P. VAN DER BURG, Directors of the Rotterdam Painting Institution. Royal folio, 18½ by 12½ in., Illustrated with 24 full-size Coloured Plates; also 12 plain Plates, comprising 154 Figures. Second and Cheaper Edition. Price £1 11s. 6d.

List of Plates.

1. Various Tools required for Wood Painting —2, 3. Walnut: Preliminary Stages of Graining and Finished Specimen — 4. Tools used for Marble Painting and Method of Manipulation— 5. St. Remi Marble: Earlier Operations and Finished Specimen—7. Methods of Sketching different Grains, Knots, &c.—8, 9. Ash: Preliminary Stages and Finished Specimen — 10. Methods of Sketching Marble Grains—11, 12. Breche Marble: Preliminary Stages of Working and Finished Specimen—13. Maple: Methods of Producing the different Grains—14, 15. Bird's-eye Maple: Preliminary Stages and Finished Specimen—16. Methods of Sketching the different Species of White Marble—17, 18. White Marble: Preliminary Stages of Process and Finished Specimen—19. Mahogany: Specimens of various Grains and Methods of Manipulation —20, 21. Mahogany: Earlier Stages and Finished Specimen—22, 23, 24. Sienna Marble: Varieties of Grain, Preliminary Stages and Finished Specimen—25, 26, 27. Juniper Wood: Methods of producing Grain, &c.: Preliminary Stages and Finished Specimen—28, 29, 30. Vert de Mer Marble: Varieties of Grain and Methods of Working Unfinished and Finished Specimens—31, 32, 33. Oak: Varieties of Grain, Tools Employed, and Methods of Manipulation, Preliminary Stages and Finished Specimen—34, 35, 36. Waulsort Marble: Varieties of Grain, Unfinished and Finished Specimens.

"Those who desire to attain skill in the art of painting woods and marbles will find advantage consulting this book. . . . Some of the Working Men's Clubs should give their young men the opportunity to study it."—*Builder*.

"A comprehensive guide to the art. The explanations of the processes, the manipulation and management of the colours, and the beautifully executed plates will not be the least valuable to the student who aims at making his work a faithful transcript of nature."—*Building News*.

Wall Paper.

WALL PAPER DECORATION. By ARTHUR SEYMOUR JENNINGS, Author of "Practical Paper Hanging." With numerous Illustrations. Demy 8vo [*In preparation*.

House Decoration.

ELEMENTARY DECORATION. A Guide to the Simpler Forms of Everyday Art. Together with *PRACTICAL HOUSE DECORATION*. By JAMES W. FACEY. With numerous Illustrations. In One Vol., 5s. strongly half-bound

House Painting, Graining, etc.

HOUSE PAINTING, GRAINING, MARBLING, AND SIGN WRITING, A Practical Manual of. By ELLIS A. DAVIDSON. Sixth Edition With Coloured Plates and Wood Engravings. 12mo, 6s. cloth boards.

"A mass of information, of use to the amateur and of value to the practical man."—*English Mechanic*.

Decorators, Receipts for.

THE DECORATOR'S ASSISTANT: A Modern Guide to Decorative Artists and Amateurs, Painters, Writers, Gilders, &c. Containing upwards of 600 Receipts, Rules and Instructions; with a variety of Information for General Work connected with every Class of Interior and Exterior Decorations, &c. Sixth Edition. 152 pp., crown 8vo, 1s. in wrapper.

"Full of receipts of value to decorators, painters, gilders, &c. The book contains the gist of larger treatises on colour and technical processes. It would be difficult to meet with a work so full of varied information on the painter's art."—*Building News*.

Moyr Smith on Interior Decoration.

ORNAMENTAL INTERIORS, ANCIENT AND MODERN. By J. MOYR SMITH. Super-royal 8vo, with 32 full-page Plates and numerous smaller Illustrations, handsomely bound in cloth, gilt top, price 18s.

"The book is well illustrated and handsomely got up, and contains some true criticism and a many good examples of decorative treatment."—*The Builder*.

British and Foreign Marbles.

MARBLE DECORATION and the Terminology of British and Foreign Marbles. A Handbook for Students. By GEORGE H. BLAGROVE, Author of "Shoring and its Application," &c. With 28 Illustrations. Crown 8vo, 3s. 6d. cloth.

"This most useful and much wanted handbook should be in the hands of every architect and builder."—*Building World.*

"A carefully and usefully written treatise; the work is essentially practical."—*Scotsman*

Marble Working, etc.

MARBLE AND MARBLE WORKERS: A Handbook for Architects, Artists, Masons, and Students. By ARTHUR LEE, Author of "A Visit to Carrara," "The Working of Marble," &c. Small crown 8vo, 2s. cloth.

"A really valuable addition to the technical literature of architects and masons."—*Building News.*

DELAMOTTE'S WORKS ON ILLUMINATION AND ALPHABETS.

A PRIMER OF THE ART OF ILLUMINATION, for the Use of Beginners: with a Rudimentary Treatise on the Art, Practical Directions for its Exercise, and Examples taken from Illuminated MSS., printed in Gold and Colours. By F. DELAMOTTE. New and Cheaper Edition. Small 4to, 6s. ornamental boards.

"The examples of ancient MSS. recommended to the student, which, with much good sense, the author chooses from collections accessible to all, are selected with judgment and knowledge, as well as taste."—*Athenæum.*

ORNAMENTAL ALPHABETS, Ancient and Mediæval, from the Eighth Century, with Numerals; including Gothic, Church-Text, large and small, German, Italian, Arabesque, Initials for Illumination, Monograms, Crosses, &c. &c., for the use of Architectural and Engineering Draughtsmen Missal Painters, Masons, Decorative Painters, Lithographers, Engravers, Carvers, &c. &c. Collected and Engraved by F. DELAMOTTE, and printed in Colours. New and Cheaper Edition. Royal 8vo, oblong, 2s. 6d. ornamental boards.

"For those who insert enamelled sentences round gilded chalices, who blazon shop legends over shop-doors, who letter church walls with pithy sentences from the Decalogue, this book will be useful."—*Athenæum.*

EXAMPLES OF MODERN ALPHABETS, Plain and Ornamental; including German, Old English, Saxon, Italic, Perspective, Greek, Hebrew, Court Hand, Engrossing, Tuscan, Riband, Gothic, Rustic, and Arabesque; with several Original Designs, and an Analysis of the Roman and Old English Alphabets, large and small, and Numerals, for the use of Draughtsmen, Surveyors, Masons, Decorative Painters, Lithographers, Engravers, Carvers, &c. Collected and Engraved by F. DELAMOTTE, and printed in Colours. New and Cheaper Edition. Royal 8vo, oblong, 2s. 6d. ornamental boards.

"There is comprised in it every possible shape into which the letters of the alphabet and numerals can be formed, and the talent which has been expended in the conception of the various plain and ornamental letters is wonderful."—*Standard.*

MEDIÆVAL ALPHABETS AND INITIALS FOR ILLUMINATORS. By F. G. DELAMOTTE. Containing 21 Plates and Illuminated Title, printed in Gold and Colours. With an Introduction by J. WILLIS BROOKS. Fourth and Cheaper Edition. Small 4to, 4s. ornamental boards.

"A volume in which the letters of the alphabet come forth glorified in gilding and all the colours of the prism interwoven and intertwined and intermingled."—*Sun.*

THE EMBROIDERER'S BOOK OF DESIGN. Containing Initials, Emblems, Cyphers, Monograms, Ornamental Borders, Ecclesiastical Devices, Mediæval and Modern Alphabets, and National Emblems. Collected by F. DELAMOTTE, and printed in Colours. Oblong royal 8vo, 1s. 6d. ornamental wrapper.

"The book will be of great assistance to ladies and young children who are endowed with the art of plying the needle in this most ornamental and useful pretty work."—*East Anglian Times.*

Wood Carving.

INSTRUCTIONS IN WOOD-CARVING, for Amateurs; with Hints on Design. By A LADY. With Ten Plates. New and Cheaper Edition. Crown 8vo, 2s. in emblematic wrapper.

"The handicraft of the wood-carver, so well as a book can impart it, may be learnt from 'A Lady's' publication."—*Athenæum*

NATURAL SCIENCE, etc.

The Heavens and their Origin.

THE VISIBLE UNIVERSE: Chapters on the Origin and Construction of the Heavens. By J. E. GORE, F.R.A.S. Illustrated by 6 Stellar Photographs and 12 Plates. 8vo, 16s. cloth.

"A valuable and lucid summary of recent astronomical theory, rendered more valuable and attractive by a series of stellar photographs and other illustrations."—*The Times.*

"In presenting a clear and concise account of the present state of our knowledge, Mr. Gore has made a valuable addition to the literature of the subject."—*Nature.*

"As interesting as a novel, and instructive withal; the text being made still more luminous by stellar photographs and other illustrations. . . . A most valuable book."—*Manchester Examiner*

"One of the finest works on astronomical science that has recently appeared in our language. *Leeds Mercury.*

The Constellations.

STAR GROUPS: A Student's Guide to the Constellations. By J. ELLARD GORE, F.R.A.S., M.R.I.A., &c., Author of "The Visible Universe," "The Scenery of the Heavens." With 30 Maps. Small 4to. 5s. cloth silvered.

"A knowledge of the principal constellations visible in our latitudes may be easily acquired from the thirty maps and accompanying text contained in this work."—*Nature.*

"The volume contains thirty maps showing stars of the sixth magnitude—the usual naked-eye limit—and each is accompanied by a brief commentary, adapted to facilitate recognition and bring to notice objects of special interest. For the purpose of a preliminary survey of the 'midnight pomp' of the heavens, nothing could be better than a set of delineations averaging scarcely twenty square inches in area, and including nothing that cannot at once be identified."—*Saturday Review.*

"A very compact and handy guide to the constellations."—*Athenæum.*

Astronomical Terms.

AN ASTRONOMICAL GLOSSARY; or, Dictionary of Terms used in Astronomy. With Tables of Data and Lists of Remarkable and Interesting Celestial Objects. By J. ELLARD GORE, F.R.A.S., Author of "The Visible Universe," &c. Small crown 8vo, 2s. 6d. cloth.

"A very useful little work for beginners in astronomy, and not to be despised by more advanced students."—*The Times.*

"Astronomers of all kinds will be glad to have it for reference."—*Guardian.*

The Microscope.

THE MICROSCOPE: Its Construction and Management, including Technique, Photo-micrography, and the Past and Future of the Microscope. By Dr. HENRI VAN HEURCK. Re-Edited and Augmented from the Fourth French Edition, and Translated by WYNNE E. BAXTER, F.G.S. 400 pages, with upwards of 250 Woodcuts. Imp. 8vo, 18s. cloth.

"A translation of a well-known work, at once popular and comprehensive."—*Times.*

"The translation is as felicitous as it is accurate."—*Nature.*

The Microscope.

PHOTO-MICROGRAPHY. By Dr. H. VAN HEURCK. Extracted from the above Work. Royal 8vo, with Illustrations, 1s. sewed.

Astronomy.

ASTRONOMY. By the late Rev. ROBERT MAIN, F.R.S. Third Edition, Revised, by WM. T. LYNN, B.A., F.R.A.S., 12mo, 2s. cloth.

"A sound and simple treatise, and a capital book for beginners."—*Knowledge.*

Recent and Fossil Shells.

A MANUAL OF THE MOLLUSCA: Being a Treatise on Recent and Fossil Shells. By S. P. WOODWARD, A.L.S., F.G.S. With an Appendix on *Recent and Fossil Conchological Discoveries*, by RALPH TATE, A.L.S., F.G.S. With 23 Plates and upwards of 300 Woodcuts. Reprint of Fourth Edition, 1880. Crown 8vo, 7s. 6d. cloth

"A most valuable storehouse of conchological and geological information."—*Science Gossip.*

Geology and Genesis.

THE TWIN RECORDS OF CREATION; or, Geology and Genesis: their Perfect Harmony and Wonderful Concord. By GEORGE W. VICTOR LE VAUX. Fcap. 8vo, 5s. cloth.

"A valuable contribution to the evidences of Revelation, and disposes very conclusively of the arguments of those who would set God's Works against God's Word. No real difficulty is shirked and no sophistry is left unexposed."—*The Rock.*

Geology.

RUDIMENTARY TREATISE ON GEOLOGY, PHYSICAL AND HISTORICAL. With especial reference to the British series of Rocks. By R. TATE, F.G.S. With 250 Illustrations. 12mo, 5s. cloth boards.

DR. LARDNER'S COURSE OF NATURAL PHILOSOPHY.

HANDBOOK OF MECHANICS. Re-written and Enlarged by B. LOEWY, F.R.A.S. Post 8vo, 6s. cloth.

"Mr. Loewy has carefully revised the book, and brought it up to modern requirements."—*Nature.*

HANDBOOK OF HYDROSTATICS & PNEUMATICS. Enlarged by B. LOEWY, F.R.A.S. Post 8vo, 5s. cloth.

"For those 'who desire to attain an accurate knowledge of physical science without the profound methods of mathematical investigation,' this work is well adapted."—*Chemical News.*

HANDBOOK OF HEAT. Edited and almost entirely Re-written by BENJAMIN LOEWY, F.R.A.S., &c. Post 8vo, 6s. cloth.

"The style is always clear and precise, and conveys instruction without leaving any cloudiness or lurking doubts behind."—*Engineering.*

HANDBOOK OF OPTICS. By Dr. LARDNER. Edited by T. O. HARDING, B.A. Post 8vo, 5s. cloth.

"Written by an able scientific writer and beautifully illustrated."—*Mechanic's Magazine.*

HANDBOOK OF ELECTRICITY AND MAGNETISM. By Dr. LARDNER. Edited by G. C. FOSTER, B.A. Post 8vo, 5s. cloth.

"The book could not have been entrusted to anyone better calculated to preserve the terse and lucid style of Lardner."—*Popular Science Review.*

HANDBOOK OF ASTRONOMY. By Dr. LARDNER. Fourth Edition by E. DUNKIN, F.R.A.S. Post 8vo, 9s. 6d. cloth.

"Probably no other book contains the same amount of information in so compendious and well-arranged a form—certainly none at the price at which this is offered to the public."—*Athenæum.*

"We can do no other than pronounce this work a most valuable manual of astronomy, and we strongly recommend it to all who wish to acquire a general—but at the same time correct—acquaintance with this sublime science."—*Quarterly Journal of Science.*

DR. LARDNER'S MUSEUM OF SCIENCE AND ART.

THE MUSEUM OF SCIENCE AND ART. Edited by Dr. LARDNER. With upwards of 1,200 Engravings on Wood. In 6 Double Volumes, £1 1s. in a new and elegant cloth binding; or handsomely bound in half-morocco, 31s. 6d.

"A cheap and interesting publication, alike informing and attractive. The papers combine subjects of importance and great scientific knowledge, considerable inductive powers, and a popular style of treatment."—*Spectator.*

"The 'Museum of Science and Art' is the most valuable contribution that has ever been made to the Scientific Instruction of every class of society."—Sir DAVID BREWSTER, in the *North British Review.*

*** *Separate books formed from the above, fully Illustrated, suitable for Workmen's Libraries, Science Classes, etc.*

Common Things Explained. 5s.
The Microscope. 2s. cloth.
Popular Geology. 2s. 6d. cloth.
Popular Physics. 2s. 6d. cloth.
Steam and its Uses. 2s. cloth.
Popular Astronomy. 4s. 6d. cloth.
The Bee and White Ants. 2s. cloth.
The Electric Telegraph. 1s. 6d.

Dr. Lardner's School Handbooks.

NATURAL PHILOSOPHY FOR SCHOOLS. Fcap. 8vo, 3s. 6d.

"A very convenient class-book for junior students in private schools."—*British Quarterly Review.*

ANIMAL PHYSIOLOGY FOR SCHOOLS. Fcap. 8vo, 3s. 6d.

"Clearly written, well arranged, and excellently illustrated."—*Gardener's Chronicle.*

THE ELECTRIC TELEGRAPH. By Dr. LARDNER. Revised by E. B. BRIGHT, F.R.A.S. Fcap. 8vo, 2s. 6d. cloth

"One of the most readable books extant on the Electric Telegraph."—*English Mechanic.*

CHEMICAL MANUFACTURES, CHEMISTRY.

Chemistry for Engineers, etc.

ENGINEERING CHEMISTRY: A Practical Treatise for the Use of Analytical Chemists, Engineers, Iron Masters, Iron Founders, Students, and others. Comprising Methods of Analysis and Valuation of the Principal Materials used in Engineering Work, with numerous Analyses, Examples, and Suggestions. By H. JOSHUA PHILLIPS, F.I.C., F.C.S. formerly Analytical and Consulting Chemist to the Great Eastern Railway. Second Edition, Revised and Enlarged. Crown 8vo, 400 pp., with Illustrations, 10s. 6*d.* cloth. [*Just published.*

"In this work the author has rendered no small service to a numerous body of practical men. . . . The analytical methods may be pronounced most satisfactory, being as accurate as the despatch required of engineering chemists permits."—*Chemical News.*

"Those in search of a handy treatise on the subject of analytical chemistry as applied to the every-day requirements of workshop practice will find this volume of great assistance."—*Iron.*

"The first attempt to bring forward a Chemistry specially written for the use of engineers, and we have no hesitation whatever in saying that it should at once be in the possession of every railway engineer."—*The Railway Engineer.*

"The book will be very useful to those who require a handy and concise *resumé* of approved methods of analysing and valuing metals, oils, fuels, &c. It is, in fact, a work for chemists, a guide to the routine of the engineering laboratory. . . . The book is full of good things. As a handbook of technical analysis, it is very welcome."—*Builder.*

"Considering the extensive ground which such a subject as Engineering Chemistry covers, the work is complete, and recommends itself to both the practising analyst and the analytical student."—*Chemical Trade Journal.*

"The analytical methods given are, as a whole, such as are likely to give rapid and trustworthy results in experienced hands. There is much excellent descriptive matter in the work, the chapter on 'Oils and Lubrication' being specially noticeable in this respect."—*Engineer.*

Alkali Trade, Manufacture of Sulphuric Acid, etc.

A MANUAL OF THE ALKALI TRADE, including the Manufacture of Sulphuric Acid, Sulphate of Soda, and Bleaching Powder. By JOHN LOMAS, Alkali Manufacturer, Newcastle-upon-Tyne and London. With 232 Illustrations and Working Drawings, and containing 390 pages of Text. Second Edition, with Additions. Super-royal 8vo, £1 10s. cloth.

"This book is written by a manufacturer for manufacturers. The working details of the most approved forms of apparatus are given, and these are accompanied by no less than 232 wood engravings, all of which may be used for the purposes of construction. Every step in the manufacture is very fully described in this manual, and each improvement explained."—*Athenæum.*

"We find not merely a sound and luminous explanation of the chemical principles of the trade, but a notice of numerous matters which have a most important bearing on the successful conduct of alkali works, but which are generally overlooked by even experienced technological authors."—*Chemical Review.*

The Blowpipe.

THE BLOWPIPE IN CHEMISTRY, MINERALOGY, AND GEOLOGY. Containing all known Methods of Anhydrous Analysis, many Working Examples, and Instructions for Making Apparatus. By Lieut.-Colonel W. A. Ross, R.A., F.G.S. With 120 Illustrations. Second Edition, Revised and Enlarged. Crown 8vo, 5s. cloth.

"The student who goes through the course of experimentation here laid down will gain a better insight into inorganic chemistry and mineralogy than if he had 'got up' any of the best text-books, and passed any number of examinations in their contents."—*Chemical News.*

Commercial Chemical Analysis.

THE COMMERCIAL HANDBOOK OF CHEMICAL ANALYSIS; or, Practical Instructions for the determination of the Intrinsic or Commercial Value of Substances used in Manufactures, in Trades, and in the Arts. By A. NORMANDY, Editor of Rose's "Treatise on Chemical Analysis." New Edition, to a great extent Re-written by HENRY M. NOAD, Ph.D., F.R.S. With numerous Illustrations. Crown 8vo, 12s. 6*d.* cloth.

"We strongly recommend this book to our readers as a guide, alike indispensable to the housewife as to the pharmaceutical practitioner."—*Medical Times.*

"Essential to the analysts appointed under the new Act. The most recent results are given and the work is well edited and carefully written."—*Nature.*

Dye-Wares and Colours.

THE MANUAL OF COLOURS AND DYE-WARES: Their Properties, Applications, Valuations, Impurities, and Sophistications. For the use of Dyers, Printers, Drysalters, Brokers, &c. By J. W. SLATER. Second Edition, Revised and greatly Enlarged. Crown 8vo, 7s. 6*d.* cloth.

"A complete encyclopædia of the *materia tinctoria*. The information given respecting each article is full and precise, and the methods of determining the value of articles such as these, so liable to sophistication, are given with clearness, and are practical as well as valuable."—*Chemist and Druggist.*

"There is no other work which covers precisely the same ground. To students preparing for examinations in dyeing and printing it will prove exceedingly useful."—*Chemical News.*

Modern Brewing and Malting.

A HANDYBOOK FOR BREWERS: Being a Practical Guide to the Art of Brewing and Malting. Embracing the Conclusions of Modern Research which bear upon the Practice of Brewing. By HERBERT EDWARDS WRIGHT, M.A. Crown 8vo, 530 pp., 12s. 6d. cloth.

"May be consulted with advantage by the student who is preparing himself for examinational tests, while the scientific brewer will find in it a *resume* of all the most important discoveries of modern times. The work is written throughout in a clear and concise manner, and the author takes great care to discriminate between vague theories and well-established facts."—*Brewers' Journal.*

"We have great pleasure in recommending this handybook, and have no hesitation in saying that it is one of the best—if not the best—which has yet been written on the subject of beer-brewing in this country, and it should have a place on the shelves of every brewer's library."—*The Brewer's Guardian.*

"Although the requirements of the student are primarily considered, an acquaintance of half-an-hour's duration cannot fail to impress the practical brewer with the sense of having found a trustworthy guide and practical counsellor in brewery matters."—*Chemical Trade Journal.*

Analysis and Valuation of Fuels.

FUELS: SOLID, LIQUID, AND GASEOUS, Their Analysis and Valuation. For the Use of Chemists and Engineers. By H. J. PHILLIPS, F.C.S., formerly Analytical and Consulting Chemist to the Great Eastern Railway. Second Edition, Revised and Enlarged. Crown 8vo, 5s. cloth.

"Ought to have its place in the laboratory of every metallurgical establishment, and wherever fuel is used on a large scale."—*Chemical News.*

"Cannot fail to be of wide interest, especially at the present time."—*Railway News.*

Pigments.

THE ARTIST'S MANUAL OF PIGMENTS. Showing their Composition, Conditions of Permanency, Non-Permanency, and Adulterations; Effects in Combination with Each Other and with Vehicles; and the most Reliable Tests of Purity Together with the Science and Art Department's Examination Questions on Painting. By H. C. STANDAGE. Second Edition. Crown 8vo, 2s. 6d. cloth.

"This work is indeed *multum-in-parvo*, and we can, with good conscience, recommend it to all who come in contact with pigments, whether as makers, dealers or users."—*Chemical Review.*

Gauging. Tables and Rules for Revenue Officers, Brewers, etc.

A POCKET BOOK OF MENSURATION AND GAUGING: Containing Tables, Rules and Memoranda for Revenue Officers, Brewers, Spirit Merchants, &c. By J. B. MANT (Inland Revenue). Second Edition, Revised. 18mo, 4s. leather.

"This handy and useful book is adapted to the requirements of the Inland Revenue Department, and will be a favourite book of reference."—*Civilian.*

"Should be in the hands of every practical brewer."—*Brewers' Journal.*

INDUSTRIAL ARTS, TRADES, AND MANUFACTURES.

Cotton Spinning.

COTTON MANUFACTURE: A Manual of Practical Instruction in the Processes of Opening, Carding, Combing, Drawing, Doubling and Spinning of Cotton, the Methods of Dyeing, &c. For the Use of Operatives, Overlookers and Manufacturers. By JOHN LISTER, Technical Instructor, Pendleton. 8vo, 7s. 6d. cloth. [*Just published.*

"This invaluable volume is a distinct advance in the literature of cotton manufacture."—*Machinery.*

"It is thoroughly reliable, fulfilling nearly all the requirements desired."—*Glasgow Herald.*

Flour Manufacture, Milling, etc.

FLOUR MANUFACTURE: A Treatise on Milling Science and Practice. By FRIEDRICH KICK, Imperial Regierungsrath, Professor of Mechanical Technology in the Imperial German Polytechnic Institute, Prague. Translated from the Second Enlarged and Revised Edition with Supplement. By H. H. P. POWLES, A.-M.Inst.C.E. Nearly 400 pp. Illustrated with 28 Folding Plates, and 167 Woodcuts. Royal 8vo, 25s. cloth.

"This valuable work is, and will remain, the standard authority on the science of milling. The miller who has read and digested this work will have laid the foundation, so to speak, of a successful career; he will have acquired a number of general principles which he can proceed to apply. In this handsome volume we at last have the accepted text-book of modern milling in good, sound English, which has little, if any, trace of the German idiom."—*The Miller.*

"The appearance of this celebrated work in English is very opportune, and British millers will, we are sure, not be slow in availing themselves of its pages."—*Millers' Gazette.*

Agglutinants.

CEMENTS, PASTES, GLUES AND GUMS: A Practical Guide to the Manufacture and Application of the various Agglutinants required in the Building, Metal-Working, Wood-Working and Leather-Working Trades, and for Workshop, Laboratory or Office Use. With upwards of 900 Recipes and Formulæ. By H. C. STANDAGE, Chemist. Crown 8vo, 2s. 6d. cloth. [*Just published.*

"We have pleasure in speaking favourably of this volume. So far as we have had experience, which is not inconsiderable, this manual is trustworthy."—*Athenæum.*

"As a revelation of what are considered trade secrets, this book will arouse an amount of curiosity among the large number of industries it touches."—*Daily Chronicle.*

"In this goodly collection of receipts it would be strange if a cement for any purpose cannot be found."—*Oil and Colourman's Journal.*

Soap-making.

THE ART OF SOAP-MAKING: A Practical Handbook of the Manufacture of Hard and Soft Soaps, Toilet Soaps, etc. Including many New Processes, and a Chapter on the Recovery of Glycerine from Waste Leys. By ALEXANDER WATT. Fourth Edition, Enlarged. Crown 8vo, 7s. 6d. cloth.

"The work will prove very useful, not merely to the technological student, but to the practical soap-boiler who wishes to understand the theory of his art."—*Chemical News.*

"A thoroughly practical treatise on an art which has almost no literature in our language. We congratulate the author on the success of his endeavour to fill a void in English technical literature."—*Nature.*

Paper Making.

PRACTICAL PAPER-MAKING: A Manual for Paper-makers and Owners and Managers of Paper-Mills. With Tables, Calculations, &c. By G. CLAPPERTON, Paper-maker. With Illustrations of Fibres from Micro-Photographs. Crown 8vo, 5s. cloth. [*Just published.*

"The author caters for the requirements of responsible mill hands, apprentices, &c., whilst his manual will be found of great service to students of technology, as well as to veteran paper makers and mill owners. The illustrations form an excellent feature."—*Paper Trade Review.*

"We recommend everybody interested in the trade to get a copy of this thoroughly practical book."—*Paper Making.*

Paper Making.

THE ART OF PAPER MAKING: A Practical Handbook of the Manufacture of Paper from Rags, Esparto, Straw, and other Fibrous Materials, Including the Manufacture of Pulp from Wood Fibre, with a Description of the Machinery and Appliances used. To which are added Details of Processes for Recovering Soda from Waste Liquors. By ALEXANDER WATT, Author of "The Art of Soap-Making" With Illusts. Crown 8vo, 7s. 6d. cloth.

"It may be regarded as the standard work on the subject. The book is full of valuable information. The 'Art of Paper-making,' is in every respect a model of a text-book, either for a technical class or for the private student."—*Paper and Printing Trades Journal.*

Leather Manufacture.

THE ART OF LEATHER MANUFACTURE. Being a Practical Handbook, in which the Operations of Tanning, Currying, and Leather Dressing are fully Described, and the Principles of Tanning Explained, and many Recent Processes Introduced; as also the Methods for the Estimation of Tannin, and a Description of the Arts of Glue Boiling, Gut Dressing, &c. By ALEXANDER WATT, Author of "Soap-Making," &c Second Edition. Crown 8vo, 9s. cloth.

"A sound, comprehensive treatise on tanning and its accessories. It is an eminently valuable production, which redounds to the credit of both author and publishers."—*Chemical Review.*

Boot and Shoe Making.

THE ART OF BOOT AND SHOE-MAKING. A Practical Handbook, including Measurement, Last-Fitting, Cutting-Out, Closing, and Making, with a Description of the most approved Machinery employed. By JOHN B. LENO, late Editor of *St. Crispin*, and *The Boot and Shoe-Maker*. 12mo, 2s. cloth limp.

"This excellent treatise is by far the best work ever written. The chapter on clicking, which shows how waste may be prevented, will save fifty times the price of the book."
Scottish Leather Trader.

Dentistry Construction.

MECHANICAL DENTISTRY: A Practical Treatise on the Construction of the various kinds of Artificial Dentures. Comprising also Useful Formulæ, Tables, and Receipts for Gold Plate, Clasps, Solders, &c. &c. By CHARLES HUNTER. Third Edition. Crown 8vo, 3s. 6d. cloth.

"We can strongly recommend Mr. Hunter's treatise to all students preparing for the profession of dentistry as well as to every mechanical dentist."—*Dublin Journal of Medical Science.*

Wood Engraving.

WOOD ENGRAVING: A Practical and Easy Introduction to the Study of the Art. By WILLIAM NORMAN BROWN. Second Edition. With numerous Illustrations. 12mo, 1s. 6d. cloth limp.

"The book is clear and complete, and will be useful to anyone wanting to understand the first elements of the beautiful art of wood engraving."—*Graphic.*

Horology.

A TREATISE ON MODERN HOROLOGY, in Theory and Practice. Translated from the French of CLAUDIUS SAUNIER, ex-Director of the School of Horology at Maçon, by JULIEN TRIPPLIN, F.R.A.S., Besançon Watch Manufacturer, and EDWARD RIGG, M.A., Assayer in the Royal Mint. With 78 Woodcuts and 22 Coloured Copper Plates. Second Edition. Super-royal 8vo, £2 2s. cloth; £2 10s. half-calf.

"There is no horological work in the English language at all to be compared to this production of M. Saunier's for clearness and completeness. It is alike good as a guide for the student and as a reference for the experienced horologist and skilled workman."—*Horological Journal.*

"The latest, the most complete, and the most reliable of those literary productions to which continental watchmakers are indebted for the mechanical superiority over their English brethren—in fact, the Book of Books, is M. Saunier's 'Treatise.'"—*Watchmaker, Jeweller and Silversmith.*

Watchmaking.

THE WATCHMAKER'S HANDBOOK. Intended as a Workshop Companion for those engaged in Watchmaking and the Allied Mechanical Arts. Translated from the French of CLAUDIUS SAUNIER, and considerably enlarged by JULIEN TRIPPLIN, F.R.A.S., Vice-President of the Horological Institute, and EDWARD RIGG, M.A., Assayer in the Royal Mint. With numerous Woodcuts and 14 Copper Plates. Third Edition. Crown 8vo, 9s. cloth.

"Each part is truly a treatise in itself. The arrangement is good and the language is clear and concise. It is an admirable guide for the young watchmaker."—*Engineering.*

"It is impossible to speak too highly of its excellence. It fulfils every requirement in a handbook intended for the use of a workman. Should be found in every workshop."—*Watch and Clockmaker.*

"This book contains an immense number of practical details bearing on the daily occupation of a watchmaker."—*Watchmaker and Metalworker* (Chicago).

Watches and Timekeepers.

A HISTORY OF WATCHES AND OTHER TIMEKEEPERS. By JAMES F. KENDAL, M.B.H.Inst. 1s. 6d. boards; or 2s. 6d. cloth gilt.

"Mr. Kendal's book, for its size, is the best which has yet appeared on this subject in the English language."—*Industries.*

"Open the book where you may, there is interesting matter in it concerning the ingenious devices of the ancient or modern horologer. The subject is treated in a liberal and entertaining spirit, as might be expected of a historian who is a master of the craft."—*Saturday Review.*

Electrolysis of Gold, Silver, Copper, etc.

ELECTRO-DEPOSITION: A Practical Treatise on the Electrolysis of Gold, Silver, Copper, Nickel, and other Metals and Alloys. With descriptions of Voltaic Batteries, Magneto and Dynamo-Electric Machines, Thermopiles, and of the Materials and Processes used in every Department of the Art, and several Chapters on Electro-Metallurgy. By ALEXANDER WATT, Author of "Electro-Metallurgy," &c. Third Edition, Revised. Crown 8vo, 9s. cloth.

"Eminently a book for the practical worker in electro-deposition. It contains practical descriptions of methods, processes and materials as actually pursued and used in the workshop."—*Engineer.*

Electro-Metallurgy.

ELECTRO-METALLURGY; Practically Treated. By ALEXANDER WATT, Author of "Electro-Deposition," &c. Tenth Edition, including the most recent Processes. 12mo, 4s. cloth boards.

"From this book both amateur and artisan may learn everything necessary for the successful prosecution of electroplating."—*Iron.*

Working in Gold.

THE JEWELLER'S ASSISTANT IN THE ART OF WORKING IN GOLD: A Practical Treatise for Masters and Workmen. Compiled from the Experience of Thirty Years' Workshop Practice. By GEORGE E. GEE, Author of "The Goldsmith's Handbook," &c. Cr. 8vo, 7s. 6d. cloth.

"This manual of technical education is apparently destined to be a valuable auxiliary to a handicraft which is certainly capable of great improvement."—*The Times.*

"Very useful in the workshop, as the knowledge is practical, having been acquired by long experience, and all the recipes and directions are guaranteed to be successful."—*Jeweller and Metalworker.*

Electroplating.

ELECTROPLATING: A Practical Handbook on the Deposition of Copper, Silver, Nickel, Gold, Aluminium, Brass, Platinum, &c. &c. With Descriptions of the Chemicals, Materials, Batteries, and Dynamo Machines used in the Art. By J. W. URQUHART, C.E., Author of "Electric Light," &c. Third Edition, with Additions. Crown 8vo. 5s. cloth.

"An excellent practical manual."—*Engineering.*

"An excellent work, giving the newest information."—*Horological Journal.*

Electrotyping.

ELECTROTYPING: The Reproduction and Multiplication of Printing Surfaces and Works of Art by the Electro-deposition of Metals. By J. W. URQUHART, C.E. Crown 8vo, 5s. cloth.

"The book is thoroughly practical. The reader is, therefore, conducted through the leading laws of electricity, then through the metals used by electrotypers, the apparatus, and the depositing processes, up to the final preparation of the work."—*Art Journal.*

Goldsmiths' Work.

THE GOLDSMITH'S HANDBOOK. By GEORGE E. GEE, Jeweller, &c. Third Edition, considerably Enlarged. 12mo, 3s. 6d. cl. bds.

"A good, sound educator, which will be accepted as an authority."—*Horological Journal.*

Silversmiths' Work.

THE SILVERSMITH'S HANDBOOK. By GEORGE E. GEE, Jeweller, &c. Second Edition, Revised. 12mo, 3s. 6d. cloth.

"The chief merit of the work is its practical character. . . . The workers in the trade will speedily discover its merits when they sit down to study it."—*English Mechanic.*

*** *The above two works together, strongly half-bound, price 7s.*

Sheet Metal Working.

THE SHEET METAL WORKER'S INSTRUCTOR: For Zinc, Sheet Iron, Copper, and Tin Plate Workers. Containing Rules for describing the Patterns required in the Different Branches of the Trade. By R. H. WARN, Tin Plate Worker. With Thirty-two Plates. 8vo, 7s. 6d. cl.

Bread and Biscuit Baking.

THE BREAD AND BISCUIT BAKER'S AND SUGAR-BOILER'S ASSISTANT. Including a large variety of Modern Recipes. By ROBERT WELLS, Practical Baker. Crown 8vo, 2s. cloth.

"A large number of wrinkles for the ordinary cook, as well as the baker."—*Saturday Review.*

Confectionery for Hotels and Restaurants.

THE PASTRYCOOK AND CONFECTIONER'S GUIDE, For Hotels, Restaurants and the Trade in general, adapted also for Family Use. By ROBERT WELLS. Crown 8vo, 2s. cloth.

"We cannot speak too highly of this really excellent work. In these days of keen competition our readers cannot do better than purchase this book."—*Bakers' Times.*

Ornamental Confectionery.

ORNAMENTAL CONFECTIONERY: A Guide for Bakers, Confectioners and Pastrycooks; including a variety of Modern Recipes, and Remarks on Decorative and Coloured Work. With 129 Original Designs. By ROBERT WELLS. Crown 8vo. cloth gilt, 5s.

"A valuable work, practical, and should be in the hands of every baker and confectioner. The illustrative designs are alone worth treble the amount charged for the whole work."—*Bakers' Times.*

Flour Confectionery.

THE MODERN FLOUR CONFECTIONER. Wholesale and Retail. Containing a large Collection of Recipes for Cheap Cakes, Biscuits, &c. With Remarks on the Ingredients used in their Manufacture. By R. WELLS. Crown 8vo, 2s. cloth.

"The work is of a decidedly practical character, and in every recipe regard is had to economical working."—*North British Daily Mail.*

Laundry Work.

LAUNDRY MANAGEMENT. A Handbook for Use in Private and Public Laundries, Including Descriptive Accounts of Modern Machinery and Appliances for Laundry Work. By the EDITOR of "The Laundry Journal." Second Edition. Crown 8vo, 2s. 6d. cloth.

"This book should certainly occupy an honoured place on the shelves of all housekeepers who wish to keep themselves *au courant* of the newest appliances and methods."—*The Queen.*

HANDYBOOKS FOR HANDICRAFTS.

By PAUL N. HASLUCK,

EDITOR OF "WORK" (NEW SERIES); AUTHOR OF "LATHEWORK," "MILLING MACHINES," &c.

Crown 8vo, 144 pages, cloth, price 1s. each.

☞ *These* HANDYBOOKS *have been written to supply information for* WORKMEN, STUDENTS, *and* AMATEURS *in the several Handicrafts, on the actual* PRACTICE *of the* WORKSHOP, *and are intended to convey in plain language* TECHNICAL KNOWLEDGE *of the several* CRAFTS. *In describing the processes employed, and the manipulation of material, workshop terms are used; workshop practice is fully explained; and the text is freely illustrated with drawings of modern tools, appliances, and processes.*

THE METAL TURNER'S HANDYBOOK. A Practical Manual for Workers at the Foot-Lathe. With over 100 Illustrations. Price 1s.

"The book will be of service alike to the amateur and the artisan turner. It displays thorough knowledge of the subject."—*Scotsman.*

THE WOOD TURNER'S HANDYBOOK. A Practical Manual for Workers at the Lathe. With over 100 Illustrations. Price 1s.

"We recommend the book to young turners and amateurs. A multitude of workmen have hitherto sought in vain for a manual of this special industry."—*Mechanical World.*

THE WATCH JOBBER'S HANDYBOOK. A Practical Manual on Cleaning, Repairing, and Adjusting. With upwards of 100 Illustrations. Price 1s.

"We strongly advise all young persons connected with the watch trade to acquire and study this inexpensive work."—*Clerkenwell Chronicle.*

THE PATTERN MAKER'S HANDYBOOK. A Practical Manual on the Construction of Patterns for Founders. With upwards of 100 Illustrations. Price 1s.

"A most valuable, if not indispensable, manual for the pattern maker."—*Knowledge.*

THE MECHANIC'S WORKSHOP HANDYBOOK. A Practical Manual on Mechanical Manipulation. Embracing Information on various Handicraft Processes, with Useful Notes and Miscellaneous Memoranda. Comprising about 200 Subjects. Price 1s.

"A very clever and useful book, which should be found in every workshop; and it should certainly find a place in all technical schools."—*Saturday Review.*

THE MODEL ENGINEER'S HANDYBOOK. A Practical Manual on the Construction of Model Steam Engines. With upwards of 100 Illustrations. Price 1s.

"Mr. Hasluck has produced a very good little book."—*Builder.*

THE CLOCK JOBBER'S HANDYBOOK. A Practical Manual on Cleaning, Repairing, and Adjusting. With upwards of 100 Illustrations. Price 1s.

"It is of inestimable service to those commencing the trade."—*Coventry Standard.*

THE CABINET WORKER'S HANDYBOOK: A Practical Manual on the Tools, Materials, Appliances, and Processes employed in Cabinet Work. With upwards of 100 Illustrations. Price 1s.

"Mr. Hasluck's thoroughgoing little Handybook is amongst the most practical guides we have seen for beginners in cabinet-work."—*Saturday Review.*

THE WOODWORKER'S HANDYBOOK OF MANUAL INSTRUCTION. Embracing Information on the Tools, Materials, Appliances and Processes employed in Woodworking. With 104 Illustrations. Price 1s [*Just published.*

THE METALWORKER'S HANDYBOOK. With upwards of 100 Illustrations. [*In preparation.*

*** OPINIONS OF THE PRESS.

"Written by a man who knows, not only how work ought to be done, but how to do it, and how to convey his knowledge to others."—*Engineering.*

"Mr. Hasluck writes admirably, and gives complete instructions."—*Engineer.*

"Mr. Hasluck combines the experience of a practical teacher with the manipulative skill and scientific knowledge of processes of the trained mechanician, and the manuals are marvels of what can be produced at a popular price."—*Schoolmaster.*

"Helpful to workmen of all ages and degrees of experience."—*Daily Chronicle.*

"Practical, sensible, and remarkably cheap."—*Journal of Education.*

"Concise, clear and practical."—*Saturday Review.*

COMMERCE, COUNTING-HOUSE WORK, TABLES, etc.

Commercial Education.

LESSONS IN COMMERCE. By Professor R. GAMBARO, of the Royal High Commercial School at Genoa. Edited and Revised by JAMES GAULT, Professor of Commerce and Commercial Law in King's College, London. Crown 8vo, 3s. 6d. cloth.

"The publishers of this work have rendered considerable service to the cause of commercia education by the opportune production of this volume. . . . The work is peculiarly acceptable to English readers and an admirable addition to existing class-books. In a phrase, we think the work attains its object in furnishing a brief account of those laws and customs of British trade with which the commercial man interested therein should be familiar."—*Chamber of Commerce Journal.*

"An invaluable guide in the hands of those who are preparing for a commercial career."
Counting House.

Foreign Commercial Correspondence.

THE FOREIGN COMMERCIAL CORRESPONDENT: Being Aids to Commercial Correspondence in Five Languages—English, French, German, Italian, and Spanish. By CONRAD E. BAKER. Second Edition. Crown 8vo, 3s. 6d. cloth.

"Whoever wishes to correspond in all the languages mentioned by Mr. Baker cannot do better than study this work, the materials of which are excellent and conveniently arranged. They consist not of entire specimen letters but—what are far more useful—short passages, sentences, or phrases expressing the same general idea in various forms."—*Athenæum.*

"A careful examination has convinced us that it is unusually complete, well arranged, and reliable. The book is a thoroughly good one."—*Schoolmaster.*

Accounts for Manufacturers.

FACTORY ACCOUNTS: Their Principles and Practice. A Handbook for Accountants and Manufacturers, with Appendices on the Nomenclature of Machine Details; the Income Tax Acts; the Rating of Factories; Fire and Boiler Insurance; the Factory and Workshop Acts, &c., including also a Glossary of Terms and a large number of Specimen Rulings. By EMILE GARCKE and J. M. FELLS. Fourth Edition, Revised and Enlarged. Demy 8vo, 250 pages, 6s. strongly bound.

"A very interesting description of the requirements of Factory Accounts. . . . the principle of assimilating the Factory Accounts to the general commercial books is one which we thoroughly agree with."—*Accountants' Journal.*

"Characterised by extreme thoroughness. There are few owners of factories who would not derive great benefit from the perusal of this most admirable work."—*Local Government Chronicle.*

Modern Metrical Units and Systems.

MODERN METROLOGY: A Manual of the Metrical Units and Systems of the Present Century. With an Appendix containing a proposed English System. By LOWIS D'A. JACKSON, A.M.Inst.C.E., Author of "Aid to Survey Practice," &c. Large crown 8vo, 12s. 6d. cloth.

"We recommend the work to all interested in the practical reform of our weights and measures."—*Nature.*

The Metric System and the British Standards.

A SERIES OF METRIC TABLES, in which the British Standard Measures and Weights are compared with those of the Metric System at present in Use on the Continent. By C. H. DOWLING, C.E. 8vo, 10s. 6d. strongly bound.

"Mr. Dowling's Tables are well put together as a ready-reckoner for the conversion of one system into the other."—*Athenæum.*

Iron and Metal Trades' Calculator.

THE IRON AND METAL TRADES' COMPANION. For expeditiously ascertaining the Value of any Goods bought or sold by Weight, from 1s. per cwt. to 112s. per cwt., and from one farthing per pound to one shilling per pound. By THOMAS DOWNIE. 396 pp., 9s. leather.

"A most useful set of tables; nothing like them before existed."—*Building News.*

"Although specially adapted to the iron and metal trades, the tables will be found useful in every other business in which merchandise is bought and sold by weight."—*Railway News.*

Iron Shipbuilders' and Merchants' Weight Tables.

IRON-PLATE WEIGHT TABLES: For Iron Shipbuilders, Engineers, and Iron Merchants. Containing the Calculated Weights of upwards of 150,000 different sizes of Iron Plates, from 1 foot by 6 in. by ¼ in. to 10 feet by 5 feet by 1 in. Worked out on the basis of 40 lbs. to the square foot of Iron of 1 inch in thickness. Carefully compiled and thoroughly Revised by H. BURLINSON and W. H. SIMPSON. Oblong 4to, 25s. half-bound.

"This work will be found of great utility. The authors have had much practical experience of what is wanting in making estimates; and the use of the book will save much time in making elaborate calculations."—*English Mechanic.*

Chadwick's Calculator for Numbers and Weights Combined.

THE NUMBER, WEIGHT, AND FRACTIONAL CALCULATOR. Containing upwards of 250,000 Separate Calculations, showing at a glance the value at 422 different rates, ranging from $\frac{1}{32}$th of a Penny to 20s. each, or per cwt., and £20 per ton, of any number of articles consecutively, from 1 to 470.—Any number of cwts., qrs., and lbs., from 1 cwt. to 470 cwts.—Any number of tons, cwts., qrs., and lbs., from 1 to 1,000 tons. By WILLIAM CHADWICK, Public Accountant. Third Edition, Revised and Improved. 8vo, 18s., strongly bound for Office wear and tear.

☞ *Is adapted for the use of Accountants and Auditors, Railway Companies, Canal Companies, Shippers, Shipping Agents, General Carriers, etc. Ironfounders, Brassfounders, Metal Merchants, Iron Manufacturers, Ironmongers, Engineers, Machinists, Boiler Makers, Millwrights, Roofing, Bridge and Girder Makers, Colliery Proprietors, etc. Timber Merchants, Builders, Contractors, Architects, Surveyors, Auctioneers, Valuers, Brokers, Mill Owners and Manufacturers, Mill Furnishers, Merchants, and General Wholesale Tradesmen. Also for the Apportionment of Mileage Charges for Railway Traffic.*

*** OPINIONS OF THE PRESS.

"It is as easy of reference for any answer or any number of answers as a dictionary, and the references are even more quickly made. For making up accounts or estimates the book must prove invaluable to all who have any considerable quantity of calculations involving price and measure in any combination to do."—*Engineer.*

"The most complete and practical ready reckoner which it has been our fortune yet to see. It is difficult to imagine a trade or occupation in which it could not be of the greatest use, either in saving human labour or in checking work. The publishers have placed within the reach of every commercial man an invaluable and unfailing assistant."—*The Miller.*

"The most perfect work of the kind yet prepared."—*Glasgow Herald.*

Harben's Comprehensive Weight Calculator.

THE WEIGHT CALCULATOR. Being a Series of Tables upon a New and Comprehensive Plan, exhibiting at One Reference the exact Value of any Weight from 1 lb. to 15 tons, at 300 Progressive Rates, from 1*d.* to 168s. per cwt., and containing 186,000 Direct Answers, which, with their Combinations, consisting of a single addition (mostly to be performed at sight), will afford an aggregate of 10,266,000 Answers; the whole being calculated and designed to ensure correctness and promote despatch. By HENRY HARBEN, Accountant. Fourth Edition, carefully Corrected. Royal 8vo, £1 5s. strongly half-bound.

"A practical and useful work of reference for men of business generally; it is the best of the kind we have seen."—*Ironmonger.*

"Of priceless value to business men. It is a necessary book in all mercantile offices."—*Sheffield Independent.*

Harben's Comprehensive Discount Guide.

THE DISCOUNT GUIDE. Comprising several Series of Tables for the use of Merchants, Manufacturers, Ironmongers, and others, by which may be ascertained the exact Profit arising from any mode of using Discounts, either in the Purchase or Sale of Goods, and the method of either Altering a Rate of Discount or Advancing a Price, so as to produce, by one operation, a sum that will realise any required profit after allowing one or more Discounts: to which are added Tables of Profit or Advance from 1½ to 90 per cent., Tables of Discount from 1½ to 98½ per cent., and Tables of Commission, &c., from ⅛ to 10 per cent. By HENRY HARBEN, Accountant, Author of "The Weight Calculator." New Edition, carefully Revised and Corrected. Demy 8vo, 544 pp., £1 5s. half-bound.

"A book such as this can only be appreciated by business men, to whom the saving of time means saving of money. We have the high authority of Professor J. R. Young that the tables throughout the work are constructed upon strictly accurate principles. The work is a model of typographical clearness, and must prove of great value to merchants, manufacturers, and general traders."—*British Trade Journal.*

New Wages Calculator.

TABLES OF WAGES at 54, 52, 50 and 48 Hours per Week. Showing the Amounts of Wages from One-quarter-of-an-hour to Sixty-four hours in each case at Rates of Wages advancing by One Shilling from 4s. to 55s. per week. By THOS. GARBUTT, Accountant. Square crown 8vo. 6s. half-bound. [*Just published.*

"DIRECT CALCULATORS,"

By M. B. COTSWORTH, of Holgate, York.

QUICKEST AND MOST ACCURATE MEANS OF CALCULATION KNOWN. ENSURE ACCURACY and SPEED WITH EASE, SAVE TIME and MONEY.

Accounts may be charged out or checked by these means in about one third the time required by ordinary methods of calculation. These unrivalled "Calculators" have very clear and original contrivances for instantly finding the exact answer, by its fixed position, without even sighting the top or side of the page. They are varied in arrangement to suit the special need of each particular trade.

All the leading firms now use Calculators, even where they employ experts.

N.B.—Indicator letters in brackets should be quoted.

"*RAILWAY & TRADERS' CALCULATOR*" **(R. & T.)** 10*s.* 6*d.* Including Scale of Charges for Small Parcels by Merchandise Trains. "Direct Calculator"—the only Calculator published giving exact charge for Cwts., Qrs. and Lbs., together. "Calculating Tables" for every 1*d.* rate to 100*s.* per ton. "Wages Calculator." "Percentage Rates." "Grain, Flour, Ale, &c., Weight Calculators."

"*DIRECT CALCULATOR* **(I R)**" including all the above except "Calculating Tables." 7*s.*

"*DIRECT CALCULATOR* **(A)**" by ½*d.*, 2*s.* each opening, exact pence to 40*s.* per ton. 5*s.*

"*DIRECT CALCULATOR* **(B)**" by 1*d.*, 4*s.* each opening, exact pence to 40*s.* per ton. 4*s.* 6*d.*

"*DIRECT CALCULATOR* **(C)**" by 1*d.* (with Cwts. and Qrs. to nearest farthing), to 40*s.* per ton. 4*s.* 6*d.*

"*DIRECT CALCULATOR* **(Ds)**" by 1*d.* gradations. (Single Tons to 50 Tons, then by fifties to 1,000 Tons, with Cwts. values below in exact pence payable, fractions of ½*d.* and upwards being counted as 1*d.* 6*s.* 6*d.*

"*DIRECT CALCULATOR* **(D)**" has from 1,000 to 10,000 Tons in addition to the **(Ds)** Calculator. 7*s.* 6*d.*

"*DIRECT CALCULATOR* **(Es)**" by 1*d.* gradations. (As **(D)** to 1,000 Tons, with Cwts. and Qrs. values shown separately to the nearest farthing). 5*s.* 6*d.*

"*DIRECT CALCULATOR* **(E)**" has from 1,000 to 10,000 Tons in addition to the **(Es)** Calculator. 6*s.* 6*d.*

"*DIRECT CALCULATOR* **(F)**" by 1*d.*, 2*s.* each opening, exact pence to 40*s.* per ton. 4*s.* 6*d.*

"*DIRECT CALCULATOR* **(G)**" by 1*d.*, 1*s.* each opening; 6 in. by 9 in. Nearest ¼*d.* Indexed **(G I)** 3*s.* 6*d.* 2*s.* 6*d.*

"*DIRECT CALCULATOR* **(H)**" by 1*d.*, 1*s.* each opening; 6 in. by 9 in. To exact pence. Indexed **(H I)** 3*s.* 6*d.* 2*s.* 6*d.*

"*DIRECT CALCULATOR* **(K)**" Showing Values of Tons, Cwts. and Qrs. in even pence (fractions of 1*d.* as 1*d.*), for the Retail Coal Trade. 4*s.* 6*d.*

"*RAILWAY AND TIMBER TRADES MEASURER AND CALCULATOR* **(T)**" (as prepared for the Railway Companies). The only book published giving true content of unequal sided and round timber by eighths of an inch, quarter girth, Weights from Cubic Feet—Standards, Superficial Feet, and Stone to Weights—Running Feet from lengths of Deals—Standard Multipliers—Timber Measures—Customs Regulations, &c. 3*s.* 6*d.*

AGRICULTURE, FARMING, GARDENING, etc.

Dr. Fream's New Edition of "The Standard Treatise on Agriculture."

THE COMPLETE GRAZIER, and FARMER'S and CATTLE-BREEDER'S ASSISTANT: A Compendium of Husbandry. Originally Written by WILLIAM YOUATT. Thirteenth Edition, entirely Re-written, considerably Enlarged, and brought up to the Present Requirements of Agricultural Practice, by WILLIAM FREAM, LL.D., Steven Lecturer in the University of Edinburgh, Author of "The Elements of Agriculture," &c. Royal 8vo, 1,100 pp., with over 450 Illustrations. £1 11s. 6d. strongly and handsomely bound.

EXTRACT FROM PUBLISHERS' ADVERTISEMENT.

"A treatise that made its original appearance in the first decade of the century, and that enters upon its Thirteenth Edition before the century has run its course, has undoubtedly established its position as a work of permanent value. . . The phenomenal progress of the last dozen years in the Practice and Science of Farming has rendered it necessary, however, that the volume should be re-written, . . . and for this undertaking the publishers were fortunate enough to secure the services of Dr. FREAM, whose high attainments in all matters pertaining to agriculture have been so emphatically recognised by the highest professional and official authorities. In carrying out his editorial duties, Dr. FREAM has been favoured with valuable contributions by Prof. J. WORTLEY AXE, Mr. E. BROWN, Dr. BERNARD DYER, Mr. W. J. MALDEN, Mr. R. H. REW, Prof. SHELDON, Mr. J. SINCLAIR, Mr. SANDERS SPENCER, and others.

"As regards the illustrations of the work, no pains have been spared to make them as representative and characteristic as possible, so as to be practically useful to the Farmer and Grazier."

SUMMARY OF CONTENTS.

BOOK I. ON THE VARIETIES, BREEDING, REARING, FATTENING, AND MANAGEMENT OF CATTLE.
BOOK II. ON THE ECONOMY AND MANAGEMENT OF THE DAIRY.
BOOK III. ON THE BREEDING, REARING, AND MANAGEMENT OF HORSES.
BOOK IV. ON THE BREEDING, REARING, AND FATTENING OF SHEEP.
BOOK V. ON THE BREEDING, REARING, AND FATTENING OF SWINE.
BOOK VI. ON THE DISEASES OF LIVE STOCK.
BOOK VII. ON THE BREEDING, REARING, AND MANAGEMENT OF POULTRY.
BOOK VIII. ON FARM OFFICES AND IMPLEMENTS OF HUSBANDRY.
BOOK IX. ON THE CULTURE AND MANAGEMENT OF GRASS LANDS.
BOOK X. ON THE CULTIVATION AND APPLICATION OF GRASSES, PULSE, AND ROOTS.
BOOK XI. ON MANURES AND THEIR APPLICATION TO GRASS LAND & CROPS
BOOK XII. MONTHLY CALENDARS OF FARMWORK.

*** OPINIONS OF THE PRESS ON THE NEW EDITION.

"Dr. Fream is to be congratulated on the successful attempt he has made to give us a work which will at once become the standard classic of the farm practice of the country. We believe that it will be found that it has no compeer among the many works at present in existence. . . . The illustrations are admirable, while the frontispiece, which represents the well-known bull, New Year's Gift, bred by the Queen, is a work of art."—*The Times.*

"The book must be recognised as occupying the proud position of the most exhaustive work freference in the English language on the subject with which it deals."—*Athenæum.*

"The most comprehensive guide to modern farm practice that exists in the English language to-day. . . . The book is one that ought to be on every farm and in the library of every landowner."—*Mark Lane Express.*

"In point of exhaustiveness and accuracy the work will certainly hold a pre-eminent and unique position among books dealing with scientific agricultural practice. It is, in fact, an agricultural library of itself."—*North British Agriculturist.*

"A compendium of authoritative and well-ordered knowledge on every conceivable branch of the work of the live stock farmer; probably without an equal in this or any other country."
Yorkshire Post.

British Farm Live Stock.

FARM LIVE STOCK OF GREAT BRITAIN. By ROBERT WALLACE, F.L.S., F.R.S.E., &c., Professor of Agriculture and Rural Economy in the University of Edinburgh. Third Edition, thoroughly Revised and considerably Enlarged. With over 120 Phototypes of Prize Stock. Demy 8vo, 384 pp., with 79 Plates and Maps, 12s. 6d. cloth.

"A really complete work on the history, breeds, and management of the farm stock of Great Britain, and one which is likely to find its way to the shelves of every country gentleman's library."—*The Times.*

"The latest edition of 'Farm Live Stock of Great Britain' is a production to be proud of, and its issue not the least of the services which its author has rendered to agricultural science."
Scottish Farmer.

"The book is very attractive . . . and we can scarcely imagine the existence of a farmer who would not like to have a copy of this beautiful work."—*Mark Lane Express.*

"A work which will long be regarded as a standard authority whenever a concise history and description of the breeds of live stock in the British Isles is required."—*Bell's Weekly Messenger.*

Dairy Farming.

BRITISH DAIRYING. A Handy Volume on the Work of the Dairy-Farm. For the Use of Technical Instruction Classes, Students in Agricultural Colleges, and the Working Dairy-Farmer. By Prof. J. P. SHELDON, late Special Commissioner of the Canadian Government, Author of "Dairy Farming," &c. With numerous Illustrations. Crown 8vo, 2s. 6d. cloth.

"We confidently recommend it as a text-book on dairy farming."—*Agricultural Gazette.*

"Probably the best half-crown manual on dairy work that has yet been produced."—*North British Agriculturist.*

"It is the soundest little work we have yet seen on the subject."—*The Times.*

Dairy Manual.

MILK, CHEESE AND BUTTER: A Practical Handbook on their Properties and the Processes of their Production, including a Chapter on Cream and the Methods of its Separation from Milk. By JOHN OLIVER, late Principal of the Western Dairy Institute, Berkeley. With Coloured Plates and 200 Illusts. Crown 8vo, 7s. 6d. cloth. [*Just published.*

"An exhaustive and masterly production. It may be cordially recommended to all students and practitioners of dairy science."—*N.B. Agriculturist.*

"We strongly recommend this very comprehensive and carefully-written book to dairy-farmers and students of dairying. It is a distinct acquisition to the library of the agriculturist."—*Agricultural Gazette.*

Agricultural Facts and Figures.

NOTE-BOOK OF AGRICULTURAL FACTS AND FIGURES FOR FARMERS AND FARM STUDENTS. By PRIMROSE MCCONNELL, B.Sc. Fifth Edition. Royal 32mo, roan, gilt edges, with band, 4s.

"Literally teems with information, and we can cordially recommend it to all connected with agriculture."—*North British Agriculturist.*

Small Farming.

SYSTEMATIC SMALL FARMING; or, The Lessons of my Farm. Being an Introduction to Modern Farm Practice for Small Farmers. By R. SCOTT BURN. With numerous Illustrations, crown 8vo, 6s. cloth.

"This is the completest book of its class we have seen, and one which every amateur farmer will read with pleasure and accept as a guide."—*Field.*

Modern Farming.

OUTLINES OF MODERN FARMING. By R. SCOTT BURN. Soils, Manures, and Crops—Farming and Farming Economy—Cattle, Sheep, and Horses — Management of Dairy, Pigs, and Poultry — Utilisation of Town-Sewage, Irrigation, &c. Sixth Edition. In One Vol., 1,250 pp., half-bound, profusely Illustrated, 12s.

"The aim of the author has been to make his work at once comprehensive and trustworthy and he has succeeded to a degree which entitles him to much credit."—*Morning Advertiser.*

Agricultural Engineering.

FARM ENGINEERING, THE COMPLETE TEXT-BOOK OF. Comprising Draining and Embanking; Irrigation and Water Supply; Farm Roads, Fences, and Gates; Farm Buildings; Barn Implements and Machines; Field Implements and Machines; Agricultural Surveying, &c. By Prof. JOHN SCOTT. 1,150 pages, half-bound, with over 600 Illustrations, 12s.

"Written with great care, as well as with knowledge and ability. The author has done his work well; we have found him a very trustworthy guide wherever we have tested his statements. The volume will be of great value to agricultural students."—*Mark Lane Express.*

Agricultural Text-Book.

THE FIELDS OF GREAT BRITAIN: A Text-Book of Agriculture, adapted to the Syllabus of the Science and Art Department. For Elementary and Advanced Students. By HUGH CLEMENTS (Board of Trade). Second Edition, Revised, with Additions. 18mo, 2s. 6d. cloth.

"A most comprehensive volume, giving a mass of information."—*Agricultural Economist.*

"It is a long time since we have seen a book which has pleased us more, or which contains such a vast and useful fund of knowledge."—*Educational Times.*

Tables for Farmers, etc.

TABLES, MEMORANDA, AND CALCULATED RESULTS for Farmers, Graziers, Agricultural Students, Surveyors, Land Agents, Auctioneers, etc. With a New System of Farm Book-keeping. By SIDNEY FRANCIS. Third Edition, Revised. 272 pp., waistcoat-pocket size, 1s. 6d. leather.

"Weighing less than 1 oz., and occupying no more space than a match box, it contains a mass of facts and calculations which has never before, in such handy form, been obtainable. Every operation on the farm is dealt with. The work may be taken as thoroughly accurate, the whole of the tables having been revised by Dr. Fream. We cordially recommend it."—*Bell's Weekly Messenger.*

Artificial Manures and Foods.

FERTILISERS AND FEEDING STUFFS: Their Properties and Uses. A Handbook for the Practical Farmer. By BERNARD DYER, D.Sc. (Lond.) With the Text of the Fertilisers and Feeding Stuffs Act of 1893, the Regulations and Forms of the Board of Agriculture and Notes on the Act by A. J. DAVID, B.A., LL.M., of the Inner Temple, Barrister-at-Law. Crown 8vo, 120 pages, 1s. cloth. [*Just published.*

"An exeellent shilliugsworth. Dr. Dyer has done farmers good service in placing at their disposal so much useful information in so intelligible a form."—*The Times.*

The Management of Bees.

BEES FOR PLEASURE AND PROFIT: A Guide to the Manipulation of Bees, the Production of Honey, and the General Management of the Apiary. By G. GORDON SAMSON. Crown 8vo, 1s. cloth.

"The intending bee-keeper will find exactly the kind of information required to enable him to make a successful start with his hives. The author is a thoroughly competent teacher, and his book may be commended."—*Morning Post.*

Farm and Estate Book-keeping.

BOOK-KEEPING FOR FARMERS & ESTATE OWNERS. A Practical Treatise, presenting, in Three Plans, a System adapted for all Classes of Farms. By JOHNSON M. WOODMAN, Chartered Accountant. Second Edition, Revised. Crown 8vo, 3s. 6d. cloth boards; or 2s. 6d. cloth limp.

"The volume is a capital study of a most important subject."—*Agricultural Gazette.*

The young farmer, land agent, and surveyor will find Mr. Woodman's treatise more than repay its cost and study."—*Building News.*

Farm Account Book.

WOODMAN'S YEARLY FARM ACCOUNT BOOK. Giving a Weekly Labour Account and Diary, and showing the Income and Expenditure under each Department of Crops, Live Stock, Dairy, &c. &c. With Valuation, Profit and Loss Account, and Balance Sheet at the end of the Year. By JOHNSON M. WOODMAN, Chartered Accountant, Author of "Book-keeping for Farmers." Folio, 7s. 6d. half-bound. [*culture.*

"Contains every requisite form for keeping farm accounts readily and accurately."—*Agri-*

Early Fruits, Flowers, and Vegetables.

THE FORCING GARDEN; or, How to Grow Early Fruits, Flowers, and Vegetables. With Plans and Estimates for Building Glass-houses, Pits, and Frames. By SAMUEL WOOD. Crown 8vo, 3s. 6d. cloth.

"A good book, and fairly fills a place that was in some degree vacant. The book is written with great care, and contains a great deal of valuable teaching."—*Gardeners' Magazine.*

Good Gardening.

A PLAIN GUIDE TO GOOD GARDENING; or, How to Grow Vegetables, Fruits, and Flowers. By S. WOOD. Fourth Edition, with considerable Additions, &c., and numerous Illustrations. Crown 8vo. 3s. 6d. cl.

"A very good book, and one to be highly recommended as a practical guide. The practical directions are excellent."—*Athenæum.*

"May be recommended to young gardeners, cottagers, and specially to amateurs, for the plain, simple, and trustworthy information it gives on common matters too often neglected."—*Gardeners' Chronicle.*

Gainful Gardening.

MULTUM-IN-PARVO GARDENING; or, How to make One Acre of Land produce £620 a-year by the Cultivation of Fruits and Vegetables; also, How to Grow Flowers in Three Glass Houses, so as to realise £176 per annum clear Profit. By SAMUEL WOOD, Author of "Good Gardening," &c. Fifth and Cheaper Edition, Revised, with Additions. Crown 8vo, 1s. sewed.

"We are bound to recommend it as not only suited to the case of the amateur and gentleman's gardener, but to the market grower."—*Gardeners' Magazine.*

Gardening for Ladies.

THE LADIES' MULTUM-IN-PARVO FLOWER GARDEN, and Amateurs' Complete Guide. With Illusts. By S. WOOD. Cr. 8vo, 3s. 6d. cl.

Receipts for Gardeners.

GARDEN RECEIPTS. Edited by CHARLES W. QUIN. 12mo, 1s. 6d. cloth limp.

Market Gardening.

MARKET AND KITCHEN GARDENING. By Contributors to "The Garden." Compiled by C. W. SHAW, late Editor of "Gardening Illustrated." 12mo, 3s. 6d. cloth boards.

AUCTIONEERING, VALUING, LAND SURVEYING ESTATE AGENCY, etc.

Auctioneer's Assistant.

THE APPRAISER, AUCTIONEER, BROKER, HOUSE AND ESTATE AGENT AND VALUER'S POCKET ASSISTANT, for the Valuation for Purchase, Sale, or Renewal of Leases, Annuities and Reversions, and of property generally; with Prices for Inventories, &c. By JOHN WHEELER, Valuer, &c. Sixth Edition, Re-written and greatly extended by C. NORRIS, Surveyor, Valuer, &c. Royal 32mo, 5s. cloth.

"A neat and concise book of reference, containing an admirable and clearly-arranged list of prices for inventories, and a very practical guide to determine the value of furniture, &c."—*Standard.*

"Contains a large quantity of varied and useful information as to the valuation for purchase, sale, or renewal of leases, annuities and reversions, and of property generally, with prices for inventories, and a guide to determine the value of interior fittings and other effects."—*Builder.*

Auctioneering.

AUCTIONEERS: THEIR DUTIES AND LIABILITIES. A Manual of Instruction and Counsel for the Young Auctioneer. By ROBERT SQUIBBS, Auctioneer. Second Edition, Revised and partly Re-written. Demy 8vo, 12s. 6d. cloth.

*** OPINIONS OF THE PRESS.

"The standard text-book on the topics of which it treats."—*Athenæum.*

"The work is one of general excellent character, and gives much information in a compendious and satisfactory form."—*Builder.*

"May be recommended as giving a great deal of information on the law relating to auctioneers, in a very readable form."—*Law Journal.*

"Auctioneers may be congratulated on having so pleasing a writer to minister to their special needs."—*Solicitors' Journal.*

"Every auctioneer ought to possess a copy of this excellent work."—*Ironmonger.*

"Of great value to the profession. . . . We readily welcome this book from the fact that it treats the subject in a manner somewhat new to the profession."—*Estates Gazette.*

Inwood's Estate Tables.

TABLES FOR THE PURCHASING OF ESTATES, Freehold, Copyhold, or Leasehold; Annuities, Advowsons, etc., and for the Renewing of Leases held under Cathedral Churches, Colleges, or other Corporate bodies, for Terms of Years certain, and for Lives; also for Valuing Reversionary Estates, Deferred Annuities, Next Presentations, &c.; together with SMART'S Five Tables of Compound Interest, and an Extension of the same to Lower and Intermediate Rates. By W. INWOOD. 24th Edition, with considerable Additions, and new and valuable Tables of Logarithms for the more Difficult Computations of the Interest of Money, Discount, Annuities, &c., by M. FEDOR THOMAN, of the Société Crédit Mobilier of Paris. Crown 8vo, 8s. cloth.

"Those interested in the purchase and sale of estates, and in the adjustment of compensation cases, as well as in transactions in annuities, life insurances, &c., will find the present edition of eminent service."—*Engineering.*

"'Inwood's Tables' still maintain a most enviable reputation. The new issue has been enriched by large additional contributions by M. Fedor Thoman, whose carefully arranged Tables cannot fail to be of the utmost utility."—*Mining Journal.*

Agricultural Valuer's Assistant.

THE AGRICULTURAL VALUER'S ASSISTANT. A Practical Handbook on the Valuation of Landed Estates; including Rules and Data for Measuring and Estimating the Contents, Weights, and Values of Agricultural Produce and Timber, and the Values of Feeding Stuffs, Manures, and Labour; with Forms of Tenant-Right-Valuations, Lists of Local Agricultural Customs, Scales of Compensation under the Agricultural Holdings Act, &c. &c. By TOM BRIGHT, Agricultural Surveyor. Second Edition, much Enlarged. Crown 8vo, 5s. cloth.

"Full of tables and examples in connection with the valuation of tenant-right, estates, labour, contents, and weights of timber, and farm produce of all kinds."—*Agricultural Gazette.*

"An eminently practical handbook, full of practical tables and data of undoubted interest and value to surveyors and auctioneers in preparing valuations of all kinds."—*Farmer.*

Plantations and Underwoods.

POLE PLANTATIONS AND UNDERWOODS: A Practical Handbook on Estimating the Cost of Forming, Renovating, Improving, and Grubbing Plantations and Underwoods, their Valuation for Purposes of Transfer, Rental, Sale, or Assessment. By TOM BRIGHT, Author of "The Agricultural Valuer's Assistant," &c. Crown 8vo, 3s. 6d. cloth.

"To valuers, foresters and agents it will be a welcome aid."—*North British Agriculturist.*

"Well calculated to assist the valuer in the discharge of his duties, and of undoubted interest and use both to surveyors and auctioneers in preparing valuations of all kinds."—*Kent Herald.*

Hudson's Land Valuer's Pocket-Book.

THE LAND VALUER'S BEST ASSISTANT: Being Tables on a very much Improved Plan, for Calculating the Value of Estates. With Tables for reducing Scotch, Irish, and Provincial Customary Acres to Statute Measure, &c. By R. HUDSON, C.E. New Edition. Royal 32mo, 4s. leather.

"Of incalculable value to the country gentleman and professional man."—*Farmers' Journal.*

Ewart's Land Improver's Pocket-Book.

THE LAND IMPROVER'S POCKET-BOOK OF FORMULÆ, TABLES, and MEMORANDA required in any Computation relating to the Permanent Improvement of Landed Property. By JOHN EWART, Surveyor. Second Edition. Royal 32mo, 4s. leather.

Complete Agricultural Surveyor's Pocket-Book.

THE LAND VALUER'S AND LAND IMPROVER'S COMPLETE POCKET-BOOK. Being of the above Two Works bound together. Leather, with strap, 7s. 6d.

House Property.

HANDBOOK OF HOUSE PROPERTY. A Popular and Practical Guide to the Purchase, Mortgage, Tenancy, and Compulsory Sale of Houses and Land, including the Law of Dilapidations and Fixtures; with Examples of all kinds of Valuations, Useful Information on Building, and Suggestive Elucidations of Fine Art. By E. L. TARBUCK, Architect and Surveyor. Fifth Edition, Enlarged. 12mo, 5s. cloth.

"The advice is thoroughly practical."—*Law Journal.*

"For all who have dealings with house property, this is an indispensable guide."—*Decoration.*

"Carefully brought up to date, and much improved by the addition of a division on fine art. . . . A well-written and thoughtful work."—*Land Agent's Record.*

LAW AND MISCELLANEOUS.

Journalism.

MODERN JOURNALISM. A Handbook of Instruction and Counsel for the Young Journalist. By JOHN B. MACKIE, Fellow of the Institute of Journalists. Crown 8vo, 2s. cloth. [*Just published.*

"This invaluable guide to journalism is a work which all aspirants to a Journalistic career wil read with advantage."—*Journalist.*

Private Bill Legislation and Provisional Orders.

HANDBOOK FOR THE USE OF SOLICITORS AND ENGINEERS Engaged in Promoting Private Acts of Parliament and Provisional Orders, for the Authorization of Railways, Tramways, Gas and Water Works, &c. By L. LIVINGSTON MACASSEY, of the Middle Temple, Barrister-at-Law, M.Inst.C.E. 8vo, 25s. cloth.

Law of Patents.

PATENTS FOR INVENTIONS, AND HOW TO PROCURE THEM. Compiled for the Use of Inventors, Patentees and others. By G. G. M. HARDINGHAM, Assoc.Mem.Inst.C.E., &c. Demy 8vo, 1s. 6d. cloth.

Labour Disputes.

CONCILIATION AND ARBITRATION IN LABOUR DISPUTES: A Historical Sketch and Brief Statement of the Present Position of the Question at Home and Abroad. By J. S. JEANS, Author of "England's Supremacy," &c. Crown 8vo, 200 pp., 2s. 6d. cloth. [*Just published.*

"Mr. Jeans is well qualified to write on this subject, both by his previous books and by his practical experience as an arbitrator."—*The Times.*

Pocket-Book for Sanitary Officials.

THE HEALTH OFFICER'S POCKET-BOOK: A Guide to Sanitary Practice and Law. For Medical Officers of Health, Sanitary Inspectors, Members of Sanitary Authorities, &c. By EDWARD F. WILLOUGHBY, M.D. (Lond.), &c., Author of "Hygiene and Public Health." Fcap. 8vo, 7s. 6d. cloth, red edges, rounded corners. [*Just published.*

"A mine of condensed information of a pertinent and useful kind on the various subjects of which it treats. The matter seems to have been carefully compiled and arranged for facility of reference, and it is well illustrated by diagrams and woodcuts. The different subjects are succinctly but fully and scientifically dealt with."—*The Lancet.*

"An excellent publication, dealing with the scientific, technical and legal matters connected with the duties of medical officers of health and sanitary inspectors. The work is replete with information."—*Local Government Journal.*

A Complete Epitome of the Laws of this Country.

EVERY MAN'S OWN LAWYER: A HANDY-BOOK OF THE PRINCIPLES OF LAW AND EQUITY. WITH A CONCISE DICTIONARY OF LEGAL TERMS. By A BARRISTER. Thirty-second Edition, carefully Revised, and including New Acts of Parliament of 1894. Comprising the *Local Government Act*, 1894 (establishing District and Parish Councils); *Finance Act*, 1894 (imposing the New Death Duties); *Merchant Shipping Act*, 1894; *Prevention of Cruelty to Children Act*, 1894; *Building Societies Act*, 1894; *Notice of Accidents Act*, 1894; *Sale of Goods Act*, 1893; *Voluntary Conveyances Act*, 1893; *Married Women's Property Act*, 1893; *Trustee Act*, 1893; *Fertiliser and Feeding Stuffs Act*, 1893; *Betting and Loans (Infants) Act*, 1892; *Shop Hours Act*, 1892; *Small Holdings Act*, 1892; and many other important new Acts. Crown 8vo, 750 pp., price 6s. 8d. (saved at every consultation!), strongly bound in cloth. [*Just published.*

*** *The Book will be found to comprise (amongst other matter)*—

THE RIGHTS AND WRONGS OF INDIVIDUALS—LANDLORD AND TENANT—VENDORS AND PURCHASERS—LEASES AND MORTGAGES—PRINCIPAL AND AGENT—PARTNERSHIP AND COMPANIES—MASTERS, SERVANTS, AND WORKMEN—CONTRACTS AND AGREEMENTS—BORROWERS, LENDERS, AND SURETIES—SALE AND PURCHASE OF GOODS—CHEQUES, BILLS, AND NOTES—BILLS OF SALE—BANKRUPTCY—RAILWAY AND SHIPPING LAW—LIFE, FIRE, AND MARINE INSURANCE—ACCIDENT AND FIDELITY INSURANCE—CRIMINAL LAW—PARLIAMENTARY ELECTIONS—COUNTY COUNCILS—DISTRICT COUNCILS—PARISH COUNCILS—MUNICIPAL CORPORATIONS—LIBEL AND SLANDER—PUBLIC HEALTH AND NUISANCES—COPYRIGHT, PATENTS, TRADE MARKS—HUSBAND AND WIFE—DIVORCE—INFANCY—CUSTODY OF CHILDREN—TRUSTEES AND EXECUTORS—CLERGY, CHURCHWARDENS, ETC.—GAME LAWS AND SPORTING—INNKEEPERS—HORSES AND DOGS—TAXES AND DEATH DUTIES—FORMS OF AGREEMENTS, WILLS, CODICILS, NOTICES, ETC.

☞ *The object of this work is to enable those who consult it to help themselves to the law; and thereby to dispense, as far as possible, with professional assistance and advice. There are many wrongs and grievances which persons submit to from time to time through not knowing how or where to apply for redress; and many persons have as great a dread of a lawyer's office as of a lion's den. With this book at hand it is believed that many a* SIX-AND-EIGHTPENCE *may be saved; many a wrong redressed; many a right reclaimed; many a law suit avoided; and many an evil abated. The work has established itself as the standard legal adviser of all classes, and has also made a reputation for itself as a useful book of reference for lawyers residing at a distance from law libraries, who are glad to have at hand a work embodying recent decisions and enactments.*

*** OPINIONS OF THE PRESS.

"A complete code of English Law, written in plain language, which all can understand. Should be in the hands of every business man, and all who wish to abolish lawyers' bills. . . ." *Weekly Times.*

"A useful and concise epitome of the law, compiled with considerable care."—*Law Magazine.*

"A complete digest of the most useful facts which constitute English law."—*Globe.*

"Admirably done, admirably arranged, and admirably cheap."—*Leeds Mercury.*

"A concise, cheap and complete epitome of the English law. So plainly written that he who runs may read, and he who reads may understand."—*Figaro.*

"The latest edition of this popular book ought to be in every business establishment, and on every library table."—*Sheffield Post.*

"A complete epitome of the law; thoroughly intelligible to non-professional readers." *Bell's Life.*

Legal Guide for Pawnbrokers.

THE LAW OF LOANS AND PLEDGES. With Statutes and a Digest of Cases. By H. C. FOLKARD, Esq., Barrister-at-Law. Fcap. 8vo, 3s. 6d. cloth.

The Law of Contracts.

LABOUR CONTRACTS: A Popular Handbook on the Law of Contracts for Works and Services. By DAVID GIBBONS. Fourth Edition, Appendix of Statutes by T. F. UTTLEY, Solicitor. Fcap. 8vo, 3s. 6d. cloth.

The Factory Acts.

SUMMARY OF THE FACTORY AND WORKSHOP ACTS (1878-1891). For the Use of Manufacturers and Managers. By EMILE GARCKE and J. M. PELLS. (Reprinted from "FACTORY ACCOUNTS.") Crown 8vo, 6d. sewed.

OGDEN, SMALE AND CO. LIMITED, PRINTERS, GREAT SAFFRON HILL, E.C.

WEALE'S SCIENTIFIC & TECHNICAL SERIES.

MATHEMATICS, ARITHMETIC, &c.

Geometry, Descriptive. J. F. HEATHER	2/-
Practical Plane Geometry. J. F. HEATHER	2/-
Analytical Geometry. J. HANN & J. R. YOUNG	2/-
Geometry. Part I. (Euclid, Bks. I.—III.) H. LAW	1/6
Part II. (Euclid, Books IV., V., VI., XI., XII.). H. LAW	1/6
Geometry, in 1 vol. (Euclid's Elements)	2/6
Plane Trigonometry. J. HANN	1/6
Spherical Trigonometry. J. HANN	1/-
The above 2 vols., bound together	2/6
Differential Calculus. W. S. B. WOOLHOUSE	1/6
Integral Calculus. H. COX	1/-
Integral Calculus. J. HANN	1/-
Algebra. J. HADDON	2/-
Key to ditto	1/6
Book-keeping. J. HADDON	1/6
Arithmetic. J. R. YOUNG	1/6
Key to ditto	1/6
Equational Arithmetic. W. HIPSLEY	2/-
Arithmetic. J. HADDON	1/6
Key to ditto	1/6
Mathematical Instruments. HEATHER & WALMISLEY	2/-
Drawing & Measuring Instruments. J. F. HEATHER	1/6
Optical Instruments. J. F. HEATHER	1/6
Surveying & Astronomical Instruments. J. F. HEATHER	1/6
The above 3 vols., bound together	4/6
Mensuration and Measuring. T. BAKER	1/6
Slide Rule, & How to Use it. C. HOARE	2/6
Measures, Weights, & Moneys. W. S. B. WOOLHOUSE	2/6
Logarithms, Treatise on, with Tables. H. LAW	3/-
Compound Interest and Annuities. F. THOMAN	4/-
Compendious Calculator. D. O'GORMAN	2/6
Mathematics. F. CAMPIN	3/-
Astronomy. R. MAIN & W. T. LYNN	2/-
Statics and Dynamics. T. BAKER	1/6

CROSBY LOCKWOOD & SON, 7, Stationers' Hall Court, E.C.

B89089676464A

...IFIC & TECHNICAL SERIES.

& ARCHITECTURE.

Building Estates. F. MAITLAND	2/-
Science of Building. E. W. TARN	3/6
Building, Art of. E. DOBSON	2/-
Book on Building. Sir E. BECKETT	4/6
Dwelling Houses, Erection of. S. H. BROOKS	2/6
Cottage Building. C. B. ALLEN	2/-
Acoustics of Public Buildings. Prof. T. R. SMITH	1/6
Practical Bricklaying. A. HAMMOND	1/6
Practical Brick Cutting & Setting. A. HAMMOND	1/6
Brickwork, F. WALKER	1/6
Brick and Tile Making. E. DOBSON	3/-
Practical Brick & Tile Book. DOBSON & HAMMOND	6/-
Carpentry and Joinery. T. TREDGOLD & E. W. TARN	3/6
Atlas of 35 plates to the above	6/-
Handrailing, and Staircasing. G. COLLINGS	2/6
Circular Work in Carpentry. G. COLLINGS	2/6
Roof Carpentry. G. COLLINGS	2/-
Construction of Roofs. E. W. TARN	1/6
Joints used by Builders. J. W. CHRISTY	3/-
Shoring. G. H. BLAGROVE	1/6
Timber Importer's & Builder's Guide. R. E. GRANDY	2/-
Plumbing. W. P. BUCHAN	3/6
Ventilation of Buildings. W. P. BUCHAN	3/6
Practical Plasterer. W. KEMP	2/-
House-Painting. E. A. DAVIDSON	5/-
Elementary Decoration. J. W. FACEY	2/-
Practical House Decoration. J. W. FACEY	2/6
Gas-Fitting. J. BLACK	2/6
Warming and Ventilation. C. TOMLINSON	3/-
Portland Cement for Users. H. FAIJA	2/-
Limes, Cements, & Mortars. G. R. BURNELL	1/6
Masonry and Stone Cutting. E. DOBSON	2/6
Arches, Piers, and Buttresses. W. BLAND	1/6
Quantities and Measurements. A. C. BEATON	1/6
Complete Measurer. R. HORTON	4/-
Light, for use of Architects. E. W. TARN	1/6
Hints to Young Architects. WIGHTWICK & GUILLAUME	3/6

CROSBY LOCKWOOD & SON, 7, Stationers' Hall Court, E.C.

WE

Brass Founder's Manual. W. Graham . . . 2/-
House Decoration. J. W. Facey 5/-
Letter-Painting Made Easy. J. G. Badenoch . . 1/6
Boot and Shoemaking. J. B. Leno 2/-
Mechanical Dentistry. C. Hunter 3/-
Wood Engraving. W. N. Brown 1/6
Laundry Manage[illegible] . . 2/-

CROSBY LOCKWOOD [illegible] urt, E.C.

8908967646 4
b89089676464a